


14-Outlet 1U Rack-Mount PDU with Surge Protector - 8Ft (2.4m) Power Cable

Product ID


1415B8H-RACK-PDU-SP

Front View

4-Way Mounting Bracket View

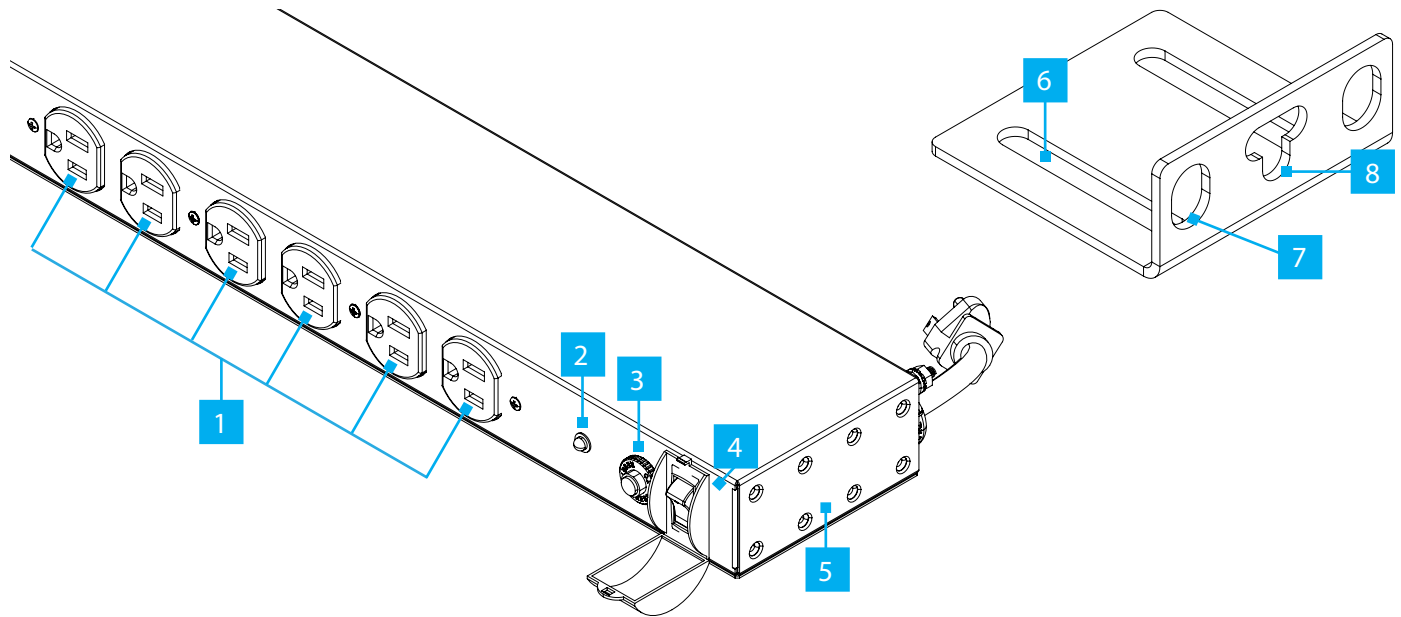

Rear View

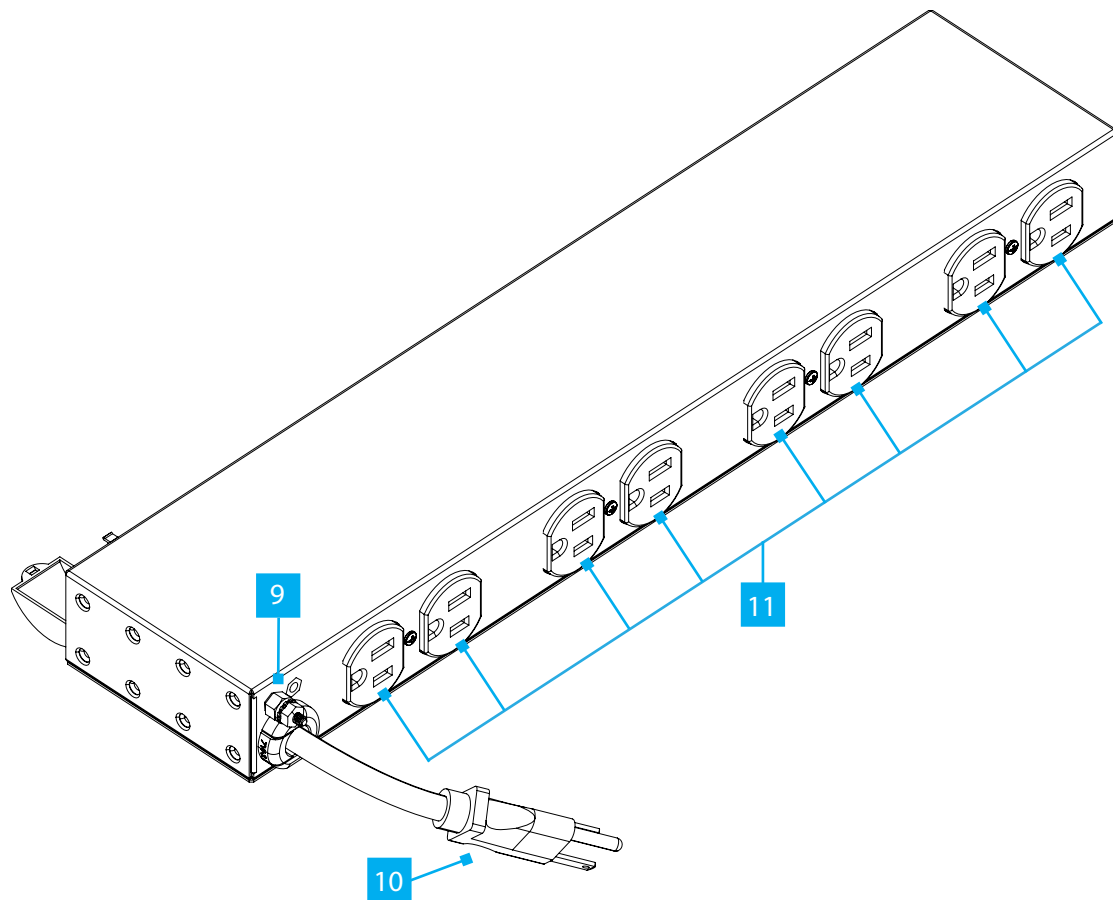

*Product may vary from image

	Feature	Function
1	Power Outlets x 6	<ul style="list-style-type: none"> • NEMA 5-15R receptacles. Rated for 125V AC, 15 Amps • Supplies AC Power to devices with NEMA 5-15P plugs
2	Surge Protection LED Status	<ul style="list-style-type: none"> • Illuminates Solid Green under normal conditions • Turns OFF due to a surge protection event • Provides up to 3,000 joules of AC Surge Protection
3	Circuit Breaker Manual Reset Button	<ul style="list-style-type: none"> • Restores Power by resetting the Circuit Breaker when tripped
4	Power Switch with Safeguard	<ul style="list-style-type: none"> • Turns the PDU (Power Delivery Unit) ON or OFF
5	4-Way Mounting Brackets Mounting Holes	<ul style="list-style-type: none"> • Enables mounting of the included 4-Way Mounting Brackets <p>Note: <i>The 4-Way Mounting Brackets are pre-installed</i></p>
6	4-Way Mounting Bracket Depth Adjustment Slots	<ul style="list-style-type: none"> • Enable fastening the 4-Way Mounting Brackets to the PDU and adjusting the PDU Mounting Depth
7	4-Way Mounting Bracket Rack Mounting Holes	<ul style="list-style-type: none"> • Enables fastening of the PDU to a Server Rack or Cabinet Mounting Posts
8	4-Way Mounting Bracket Keyhole	<ul style="list-style-type: none"> • Enables fastening of the PDU in different orientations
9	Grounding Point	<ul style="list-style-type: none"> • Attach a Grounding Wire (not included) to an Earth Ground Connection <p>Note: <i>A Grounding Wire is typically Green or Green with a Yellow stripe and should be at least 18 AWG</i></p>
10	Built-in Power Cable	<ul style="list-style-type: none"> • NEMA 5-15P plug. Rated for 125V AC, 15 Amps • Connects to a 125V AC Power Source via a NEMA 5-15R receptacle
11	Power Outlets x 8	<ul style="list-style-type: none"> • NEMA 5-15R receptacles. Rated for 125V AC, 15 Amps • Supply AC Power to devices with NEMA 5-15P plugs

Package Contents

- PDU Unit x 1 **(A)**
- 4-Way Mounting Brackets x 2 (Pre-Installed) **(B)**
- M5x12mm Rack Screws x 4 **(C)**
- M5 Cage Nuts x 4 **(D)**
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit: www.StarTech.com/1415B8H-RACK-PDU-SP

- Phillips head screwdriver (PH1) for M3 screws and PH2 for M5 Screws
- Cage nut tool (optional)

Warnings!


- StarTech.com Ltd. is not responsible for any property damage and/or personal injury resulting from the installation procedures outlined in this technical document
- Read the entire Quick-Start Guide and ensure the instructions are fully understood before using this product
- Refer to the manufacturer of the Server Rack to determine the mounting hole type and size
- If the Server Rack Mounting Posts have M5 threaded holes, the included M5x12mm Rack Screws can be installed without Cage Nuts. Use the manufacturer-recommended Screws if they differ from the ones included
- Never operate this product if parts are missing or damaged
- Do not touch the product under power if the product has an exposed printed circuit board or electrical wire
- If the connected equipment overdraws excessive current for more than a few seconds, the Circuit Breaker in the Power Delivery Unit will trip to help prevent potential equipment damage. Inspect the connected load and disconnect any non-essential or malfunctioning devices as necessary. Allow the Power Delivery Unit to cool down for at least 60 seconds before pressing the Manual Reset Button to restore functionality
- Never insert foreign objects into the PDU outlets. Doing so may result in electric shock, fire, serious injury, or irreparable equipment damage. The outlets are designed exclusively for use with compatible power plugs. Always follow the manufacturer's instructions and applicable safety standards.

Note: *This unit is only to be used inside racks within computer, telecommunications, and cloud data center rooms.*


Installation

19" Rack Mounting



1

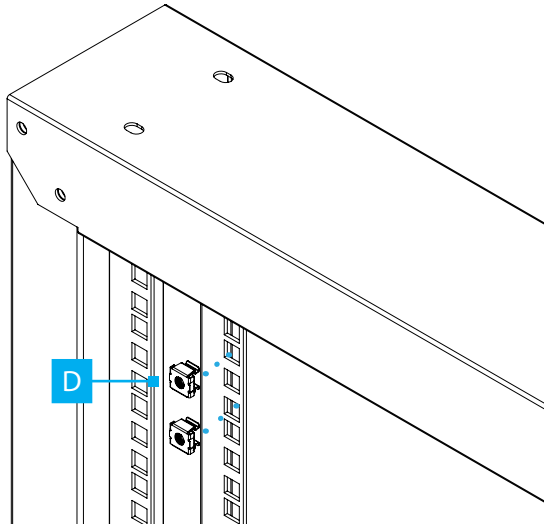


2

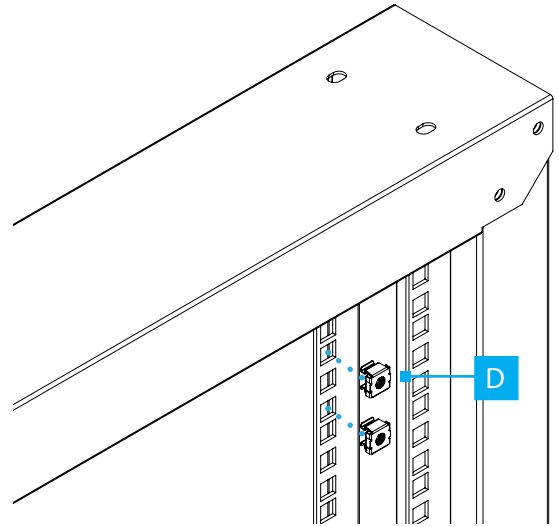


3

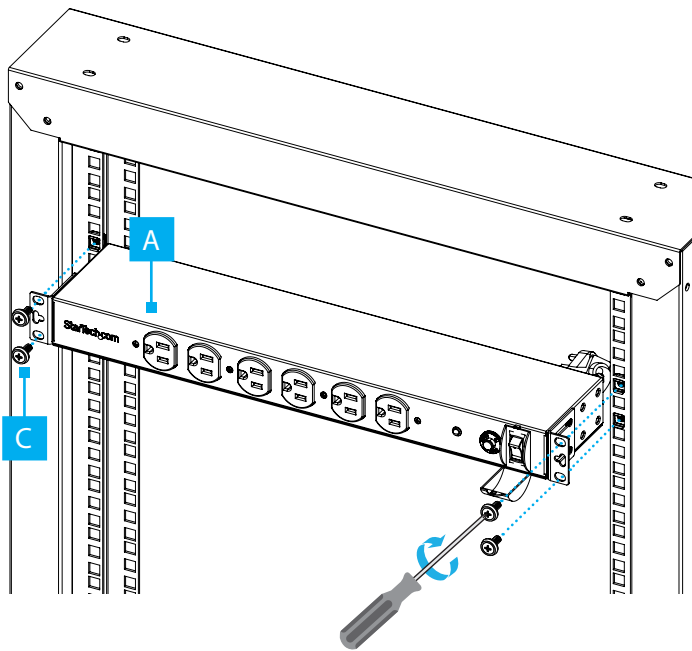


4

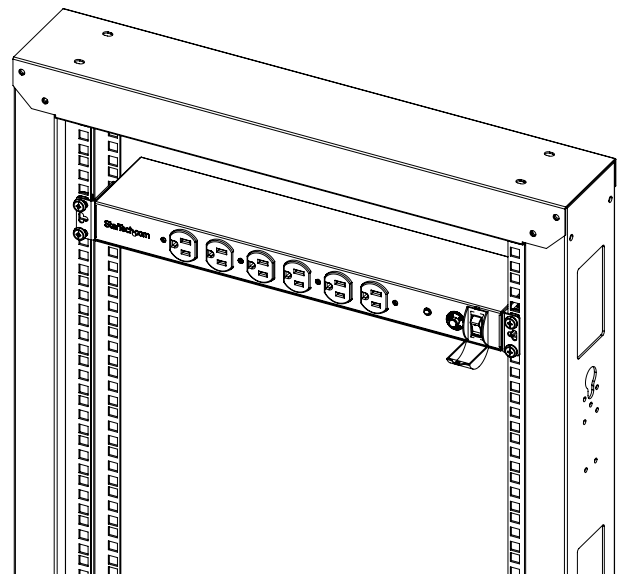


4-Way Mounting Brackets Removal and Repositioning




1

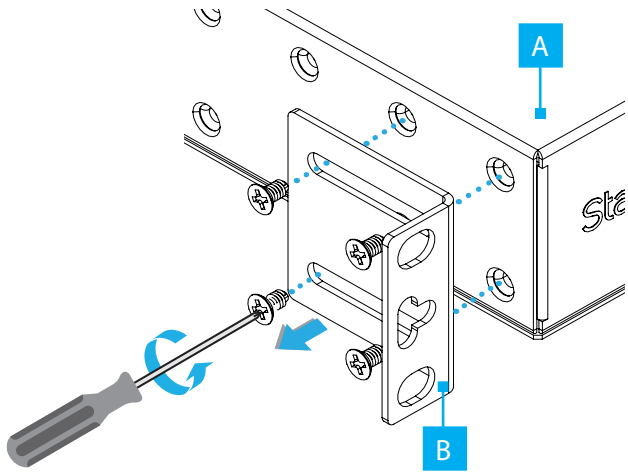


2

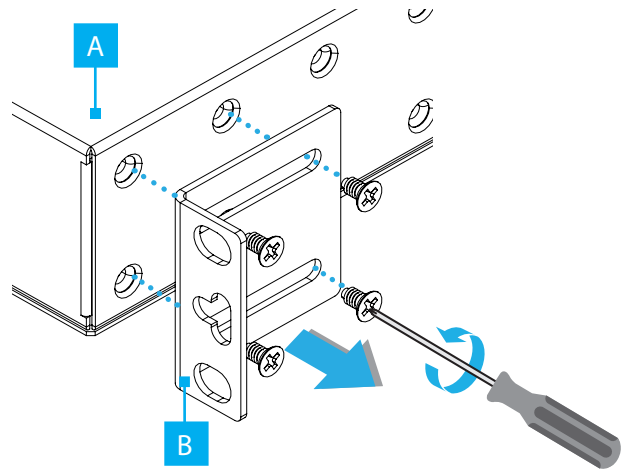

3

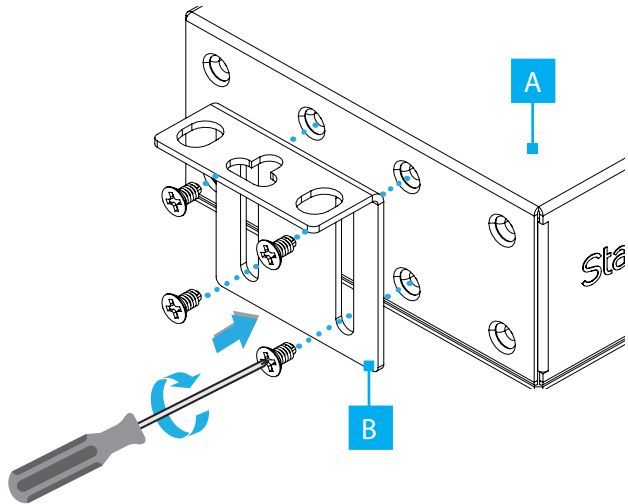


4

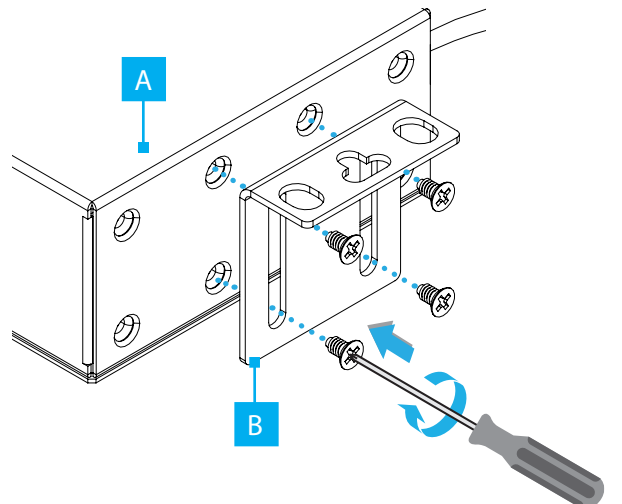


0U Vertical Mounting



1

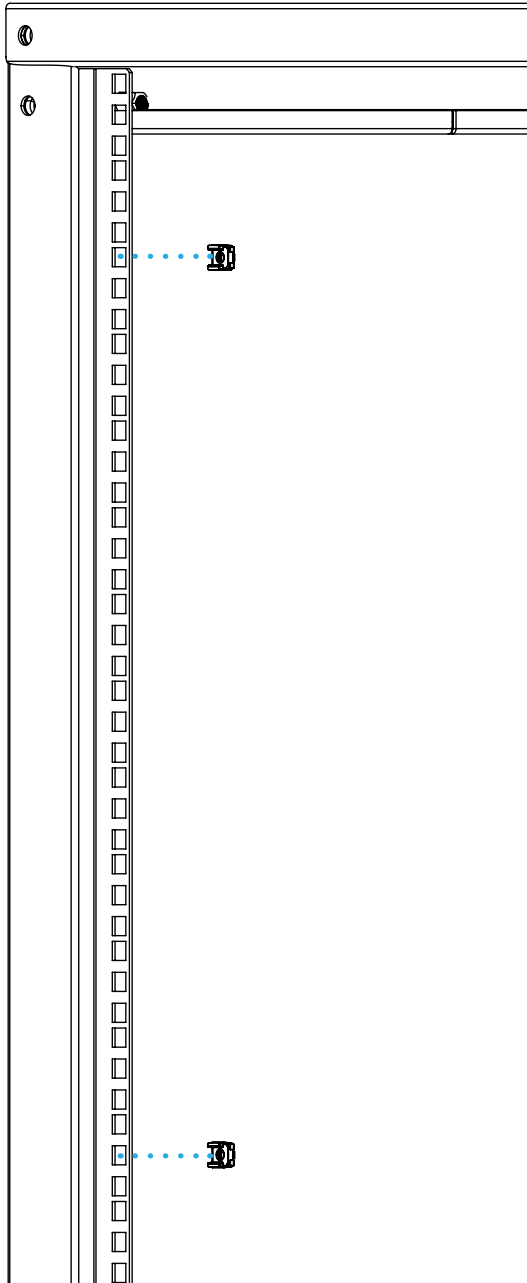



2

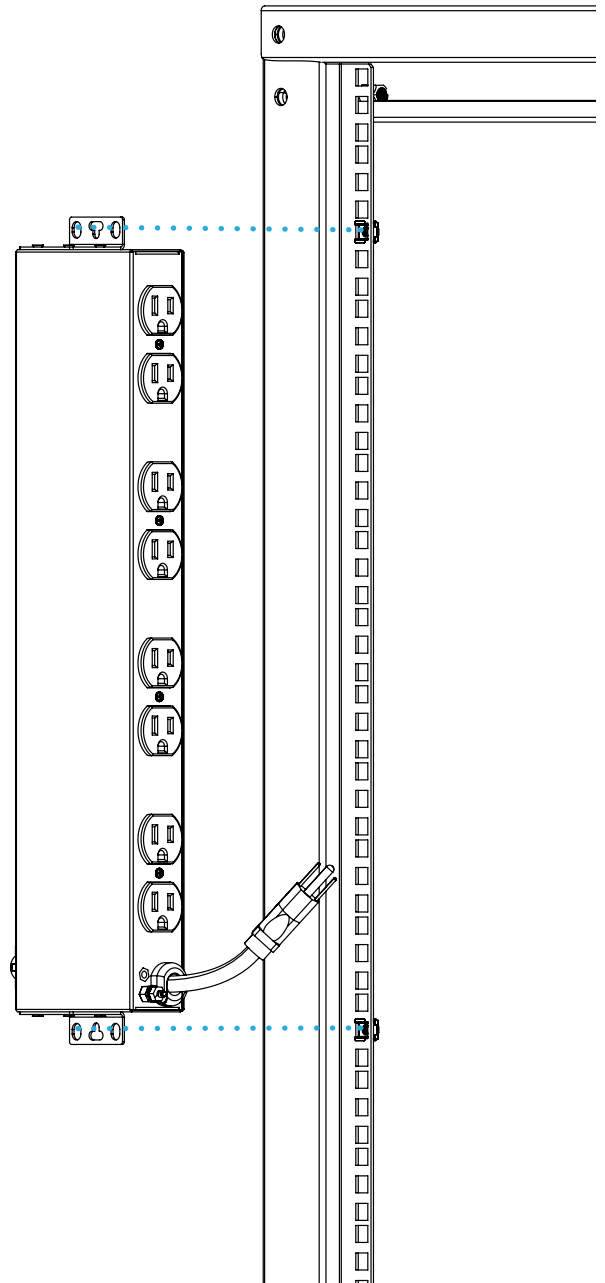

3

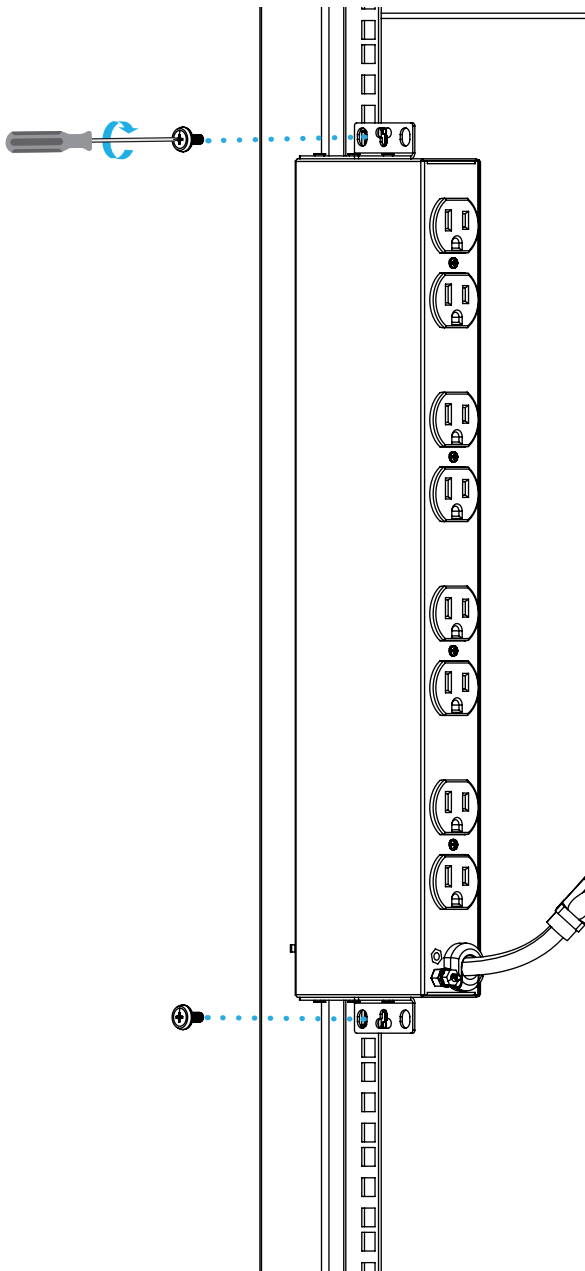

4

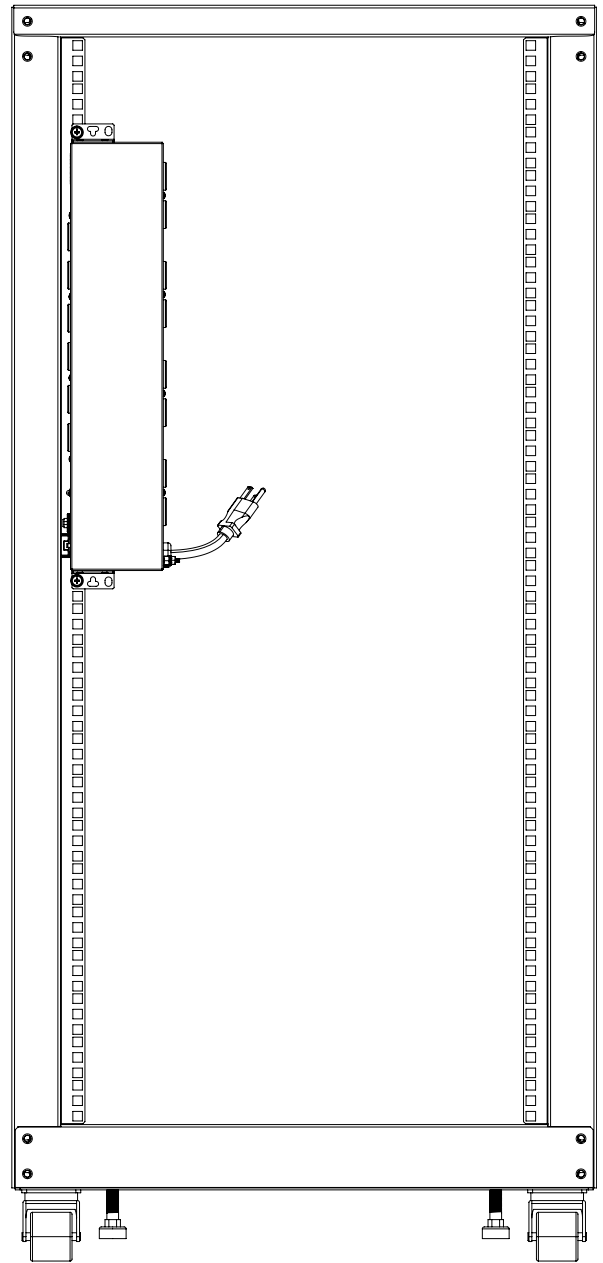

HQ Contact:
StarTech.com Ltd.
45 Artisans Crescent,
London, ON N5V 5E9,
Canada

US Contact:
StarTech.com USA LLP
4490 South Hamilton Rd,
Groveport, OH 43125,
United States

UK Contact:
StarTech.com Ltd.
15 Gowerton Rd,
Northampton, NN4 7BW,
United Kingdom

EU Contact:
StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

JP Contact:
StarTech.com K.K.
Atelier Yours Ogawamachi 7F
1-10-2 Kanda Ogawamachi
Chiyoda-ku, Tokyo 101-0052
Japan

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp