


Thunderbolt 5/USB4 Dock, Quad Display, 5x USB, 2.5GbE, 140W PD


Product ID

206N-TB5USB4DOCK
206UE-TB5USB4DOCK


Front View

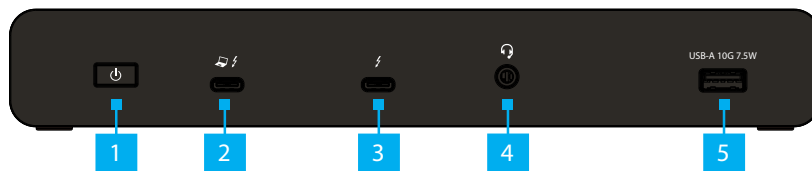

Rear View

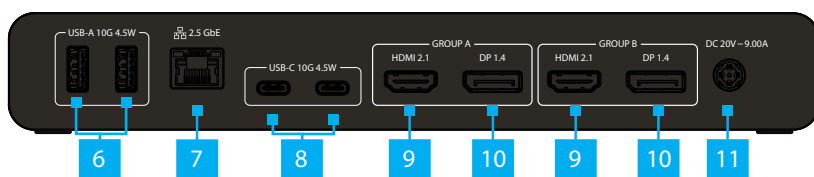

Side View



*Product may vary from image

Component		Function
1	Power Button	• Press and release to toggle Power on or off for the Docking Station
2	Thunderbolt 5 Host Connection	• Connect to a Thunderbolt 5 Port on the Host Computer • Supports Power Delivery 3.1 for up to 140W Laptop Charging
3	Thunderbolt 5 Port	• Connect a Thunderbolt Device • Supports Power Delivery 3.0 up to 45W
4	Headset Port	• Connect a 3.5mm Headset
5	USB-A 10Gbps Port	• Connect and/or charge a USB Peripheral • Supports up to 7.5W Battery Charging 1.2 • Supports up to 12W Apple Charging
6	USB-A 10Gbps Ports	• Connect and/or charge a USB Peripheral • Supports up to 4.5W
7	2.5 Gigabit Ethernet Port	• Connect the Docking Station to a Network • Supports 2.5GBASE-T
8	USB-C 10Gbps Ports	• Connect and/or charge a USB Peripheral • Supports up to 4.5W
9	HDMI Output	• Connect to an HDMI Display
10	DisplayPort Output	• Connect to a DisplayPort Monitor
11	Power Input	• Connect the Docking Station to a Power Source using the included Universal Power Adapter
12	2x Lock Slots (Nano/Standard)	• Connect a K-Slot or Nano Locking Device to deter theft of the Docking Station

Package Contents

- Thunderbolt 5 Docking Station x 1
- Thunderbolt 5 Host Cable x 1
- Universal Power Adapter x 1
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:

www.StarTech.com/206N-TB5USB4DOCK
www.StarTech.com/206UE-TB5USB4DOCK

- Computer x 1
 - This Docking Station can function with Thunderbolt 5 or USB4 host ports.
 - Video support and performance, such as the number of external displays, their resolution, and refresh rate, depend on the host computer and the performance of the video card or host port.

Installation

1. Connect the **Power Adapter** from an **AC Outlet**, to the **Power Input Port** on the **Docking Station**.
2. Connect a **3.5mm Headset** to the **3.5mm Headset Port** on the front of the **Docking Station**.
3. Connect a **Network Cable** from a **Network Port/Device** to the **2.5 Gigabit Ethernet Port** on the back of the **Docking Station**.
4. Connect **USB Devices** or **Peripherals** to the **USB-A** and **USB-C Ports** located on the front and rear of the **Docking Station**.
5. (Optional) Connect a **Thunderbolt Device** to the **Thunderbolt 5 Port**.
6. Connect a **DisplayPort Monitor** to the **DisplayPort Port** (Group A) on the **Dock** using a **DisplayPort Cable** (sold separately).
7. Connect an **HDMI Monitor** to the **HDMI Port** (Group A) on the **Dock** using an **HDMI Cable** (sold separately).
8. Connect a **DisplayPort Monitor** to the **DisplayPort Port** (Group B) on the **Dock** using a **DisplayPort Cable** (sold separately).
9. Connect an **HDMI Monitor** to the **HDMI Port** (Group B) on the **Dock** using an **HDMI Cable** (sold separately).
***Note:** For the best possible performance, one Group A and one Group B output should be utilized first as Group A and B correspond to separate video controllers.*
10. Connect the included **Thunderbolt 5 Host Cable** from the **Thunderbolt 5 Host Connection** on the back of the **Docking Station** to a **Thunderbolt 5 Port** on the **Laptop**.
11. Press the **Power Button** on the front to power on the **Docking Station**.
12. The **Host Computer** will automatically detect the **Docking Station** and install the required **Drivers**.

StarTech.com Ltd.
 45 Artisans Crescent
 London, Ontario
 N5V 5E9
 Canada

StarTech.com LLP
 4490 South Hamilton
 Road
 Groveport, Ohio
 43125
 U.S.A.

StarTech.com Ltd.
 Unit B, Pinnacle 15
 Gowerton Road
 Brackmills,
 Northampton
 NN4 7BW
 United Kingdom

StarTech.com Ltd.
 Siriusdreef 17-27
 2132 WT Hoofddorp
 The Netherlands

FR: startech.com/fr
 DE: startech.com/de
 ES: startech.com/es
 NL: startech.com/nl
 IT: startech.com/it
 JP: startech.com/jp

