


USB-C Triple-Monitor Dock - HDMI or DP, 4x USB-A/3x USB-C, 2.5GbE, 140W PD


Product ID

DK30C2DPEPRN
DK30C2DPEPRUE


Front View

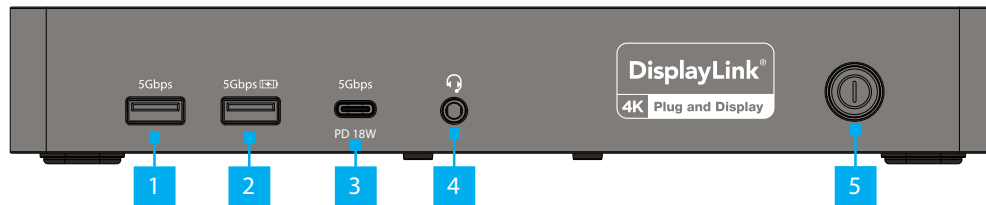

Side View

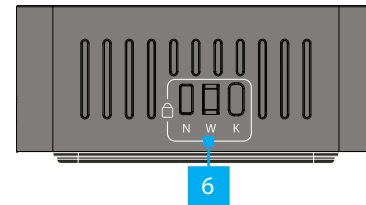

Rear View

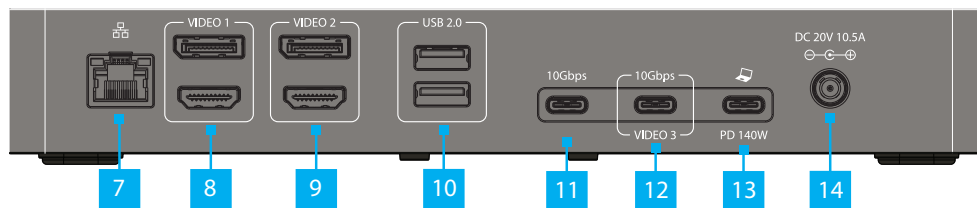

Component		Function
1	USB-A Data Port	- Connect a USB Peripheral - Supports USB 5Gbps
2	USB-A Data/Charge Port	- Connect and/or charge a USB Peripheral - Supports USB 5Gbps and 7.5W BC 1.2 Charging (5V/1.5A)
3	USB-C 5Gbps Port	- Connect and/or charge a USB Peripheral - Supports USB 5Gbps and USB Power Delivery 3.0 up to 18W
4	Headset Port	Connect a 3.5mm Headset
5	Power Button	Press and release to toggle power on or off for the Docking Station
6	3x Lock Slots (Nano/Standard/Wedge)	Connect a K-Slot, Nano, or Wedge Style Locking Device to deter theft of the Docking Station
7	2.5 Gigabit Ethernet Port	- Connect the Docking Station to a Network - Supports 2.5GBASE-T
8	Video Output 1	Connect to an HDMI or DisplayPort Display
9	Video Output 2	Connect to an HDMI or DisplayPort Display
10	USB 2.0 Ports	- Connect a USB Peripheral (Mouse/Keyboard) - Supports USB 480Mbps
11	USB-C 10Gbps Port	- Connect a USB Peripheral - Supports USB 10Gbps
12	USB-C Video/Data Port	- Connect a USB Peripheral or an External Display - Supports DP Alt Mode and USB 10Gbps
13	USB-C Host Connection	- Connect to a USB-C Port on the Host Computer - Supports Power Delivery 3.1 for up to 140W Laptop Charging
14	Power Input	Connect the Docking Station to a Power Source using the included Universal Power Adapter

Package Contents

- Docking Station x 1
- 3ft (1m) USB-C Host Cable x 1
- Universal Power Adapter x 1
- Power Cable x 1
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:

www.StarTech.com/DK30C2DPEPRN
www.StarTech.com/DK30C2DPEPRUE

- Computer x 1
 - USB-C port with DP Alt Mode and Power Delivery support
 - Video performance, such as resolution and refresh rate, depends on your host computer's video controller. Please verify your computer's specifications

Installation

1. Connect the **Power Adapter** from an **AC Outlet**, to the **DC 20V Port** on the **Docking Station**.
2. Connect a **Mouse, Keyboard**, or other **USB 2.0 Devices** to the **USB 2.0 Ports** on the back of the **Docking Station**.
3. Connect a **USB Device** to the **USB-C 10Gbps Port** on the back of the **Docking Station**.
4. Connect a **USB Device** to the **USB-A Data/Charge Port** on the front of the **Docking Station**.
5. Connect a **USB Device** to the **USB-A Data Ports** on the front of the **Docking Station**.
6. Connect a **USB Device** to the **USB-C 5Gbps Port** on the front of the **Docking Station**.
7. Connect a **3.5mm Headset** to the **3.5mm Headset Port** on the front of the **Docking Station**.
8. Connect a **Network Cable** from a **Network Port/Device** to the **2.5 Gigabit Ethernet Port** on the back of the **Docking Station**.
9. **Video Output 1**
 Connect an **HDMI Cable** (sold separately) from the **HDMI Display**, to the **HDMI Output Port** on the **Docking Station**.
 or
 Connect a **DisplayPort Cable** (sold separately) from the **DisplayPort Display**, to the **DisplayPort Output Port** on the **Docking Station**.
10. **Video Output 2**
 Connect an **HDMI Cable** (sold separately) from the **HDMI Display**, to the **HDMI Output Port** on the **Docking Station**.
 or
 Connect a **DisplayPort Cable** (sold separately) from the **DisplayPort Display**, to the **DisplayPort Output Port** on the **Docking Station**.
11. **USB-C Video/Data Port**
 Connect a **USB-C Cable** or **Video Adapter** (sold separately) from the **USB-C Video/Data Port** on the **Docking Station** to a **Display**.
 or
 Connect a **USB Device** to the **USB-C Video/Data Port** on the **Docking Station**.
12. (Optional) Connect a **K-Style, Nano**, or **Wedge Laptop Lock** (sold separately) to the corresponding **Lock Slot** on the side of the **Docking Station**.
13. Connect the included **3ft (1m) USB-C Host Cable** from the **USB-C Host Connection** on the back of the **Docking Station** to a **USB-C Port** on the **Laptop**.
Note: For full functionality, the **Laptop's USB-C Port** must support **Power Delivery** and **DP Alt Mode**.
14. Press the **Power Button** on the front of the **Docking Station** to power on the **Dock**.
15. The **Host Computer** will automatically detect the **Docking Station** and install the required **Drivers**.
16. (Optional) If the **Drivers** do not automatically install, disconnect the **Docking Station** from the **Computer**, then:
 - a. Navigate to www.StarTech.com/DK30C2DPEPRN or www.StarTech.com/DK30C2DPEPRUE, and click the **Drivers/Downloads** tab.
 - b. Under **Driver(s)**, download the **Driver Package** for your operating system, and follow the steps outlined in the **Installation Guide**, that's included in the **Driver Package**.

Notes

- The docking station housing meets enclosure fire requirements, providing enhanced protection through compliant structural design.
- This equipment complies with European Commission Regulation (EU) 2023/826; the Off-Mode power consumption is less than 0.3W.
- This equipment is only suitable for mounting at heights $\leq 2\text{m}$.
- The product marking and identification label are located on the bottom of the device.

StarTech.com Ltd.
 45 Artisans Crescent
 London, Ontario
 N5V 5E9
 Canada

StarTech.com LLP
 4490 South Hamilton
 Road
 Groveport, Ohio
 43125
 U.S.A.

StarTech.com Ltd.
 Unit B, Pinnacle 15
 Gowerton Road
 Brackmills,
 Northampton
 NN4 7BW
 United Kingdom

StarTech.com Ltd.
 Siriusdreef 17-27
 2132 WT Hoofddorp
 The Netherlands

FR: startech.com/fr
 DE: startech.com/de
 ES: startech.com/es
 NL: startech.com/nl
 IT: startech.com/it
 JP: startech.com/jp

