


QDD-400G-DCO-ZR-AO

MSA and TAA Compliant 400GBase-ZR QSFP-DD Transceiver (SMF, Coherent, LC, DOM, Open ZR)

Features:

- QSFP-DD MSA compliant
- Hot pluggable QSFP-DD footprint (Type 2A)
- Supports 425Gbps Data Rate
- 8x 26.5625GBd PAM4 Serial Electrical Interface (400GAUI-8, RS(544/514) FEC)
- Duplex LC connector
- Tunable C-band Transmitter
- Coherent Receivers
- C-FEC (15%) with 10.7dB Net Coding Gain
- Up to 120km Point-to-Point Transmission on Single Mode Fibre
- Operating case temperature: -5°C to 80°C
- Power Dissipation < 18.3W
- Single +3.3V Power Supply
- RoHS Compliant

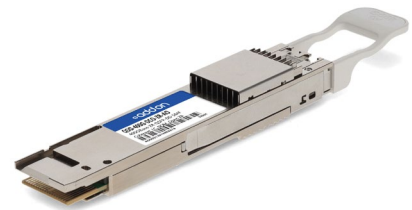

Applications

- 400GBASE-ZR

Product Description

This MSA compliant QSFP-DD transceiver provides 400GBase-ZR Open ZR throughput over Single-mode fiber (SMF) using a coherent wavelength and using an LC connector. It is built to MSA standards and is uniquely serialized and data-traffic and application tested to ensure that they will integrate into your network seamlessly. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compliant with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|------------------------------------|--------|-------|----------|-------|------|-------|
| Power Supply Voltage | VCC | 3.135 | 3.3 | 3.465 | V | |
| Storage Temperature | Ts | -40 | | 85 | °C | |
| Case Operating Temperature | Top | -5 | | 80 | °C | |
| Relative Humidity (non-condensing) | RH | | | 85 | % | |
| Optical Receiver Overload | | | | 1 | dBm | 1 |
| Supported Host Signal Types | | | 425 | | Gbps | 2 |
| Line Baud Rate | | | 59.84375 | | GBd | 3 |

Notes:

1. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers before ensuring that proper optical attenuation is used
2. As per IEEE 802.3bs-2017
3. 400G DP-16QAM, C-FEC

Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|----------------------|--------|-------|------|-------|------|-------|
| Power Supply Voltage | Vcc | 3.135 | 3.3 | 3.465 | V | |
| Power Supply Current | Icc | | | 6 | A | |
| Power Consumption | PD | | 15.8 | 18.3 | W | |
| Power Consumption | PD | | | 1.5 | W | 1 |

Notes:

1. Low power mode

Optical Characteristics

| Parameter | Symbol | Minimum | Typical | Maximum | Unit | Notes |
|-------------------------------------|-----------------|------------------|-------------|------------------|----------|-------|
| Transmitter | | | | | | |
| Average Output Power | P _o | -10 | -8.5 | -6 | dBm | 1, 2 |
| Laser Linewidth | | | | 300 | kHz | |
| Transmitter VOA Dynamic Range | | 10 | | | dB | 3 |
| Output Power Stability | | -1 | | 1 | dB | |
| In-Band OSNR | | 40 | | | dB/0.1nm | |
| Out-of-Band OSNR | | 35 | | | dB/0.1nm | |
| Frequency Range | | 191.275 | | 196.125 | THz | 4 |
| Centre Frequency | | $\nu_T - 1.5$ | ν_T | $\nu_T + 1.5$ | GHz | 5 |
| Channel Spacing | | 6.25 | | | GHz | |
| Centre Wavelength Range | T λ | 1528.58 | | 1567.34 | nm | |
| Centre Wavelength | T λ | $\lambda_T - 15$ | λ_T | $\lambda_T + 15$ | pm | |
| Receiver | | | | | | |
| Receiver Operating Wavelength | R λ | 1528.58 | | 1567.34 | nm | |
| Receiver Sensitivity | S | | | -20 | dBm | 6 |
| Receiver Overload | P _{OL} | 1 | | | dBm | 7 |
| Receiver Input Power Range | | -12 | | 1 | dBm | 8 |
| Extended Receiver Input Power Range | | -15 | | 1 | dBm | 9 |
| Acquisition Range | | -3.6 | | 3.6 | GHz | 10 |
| Upstream Tx Linewidth | | | | 500 | kHz | |
| OSNR Tolerance | | | 24 | 26 | dB | 11 |
| Crosstalk Tolerance | | | | 7 | dB | 12 |
| Chromatic Dispersion Tolerance | | | | 2400 | ps/nm | 13 |

Notes:

1. Output power coupled into a 9/125 μm single mode fibre
2. The output power is settable in steps of 0.1 dB within the specified wavelength range
3. With Tx VOA attenuation set to minimum
4. Per ITU-T G.694.1 DWDM grid definition
5. Applies also to LO
6. Minimum input power needed to achieve post-FEC BER $\leq 10^{-15}$, 400G DP-16QAM, OSNR > 35dB
7. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers before ensuring that proper optical attenuation is used
8. An input power in this range guarantees optimum OSNR performance
9. With ≤ 1 dB OSNR tolerance degradation
10. Frequency offset between received carrier and LO


11. At optimum input power range
12. Ratio of accumulated crosstalk channels to signal power
13. Less than 0.5dB receiver sensitivity penalty compared to OSNR>35dB

Pin Descriptions

| Pin | Logic | Symbol | Name/Descriptions | Plug Sequence |
|-----|-------------|----------|---|---------------|
| 1 | | GND | Ground | 1B |
| 2 | CML-I | Tx2n | Transmitter Inverted Data Input | 3B |
| 3 | CML-I | Tx2p | Transmitter Non-Inverted Data Input | 3B |
| 4 | | GND | Ground | 1B |
| 5 | CML-I | Tx4n | Transmitter Inverted Data Input | 3B |
| 6 | CML-I | Tx4p | Transmitter Non-Inverted Data Input | 3B |
| 7 | | GND | Ground | 1B |
| 8 | LVTTL-I | ModSelL | Module Select | 3B |
| 9 | LVTTL-I | ResetL | Module Reset | 3B |
| 10 | | VccRx | +3.3V Power Supply Receiver | 2B |
| 11 | LVC MOS-I/O | SCL | 2-wire serial interface clock | 3B |
| 12 | LVC MOS-I/O | SDA | 2-wire serial interface data | 3B |
| 13 | | GND | Ground | 1B |
| 14 | CML-O | Rx3p | Receiver Non-Inverted Data Output | 3B |
| 15 | CML-O | Rx3n | Receiver Inverted Data Output | 3B |
| 16 | | Ground | 1B | |
| 17 | CML-O | Rx1p | Receiver Non-Inverted Data Output | 3B |
| 18 | CML-O | Rx1n | Receiver Inverted Data Output | 3B |
| 19 | | GND | Ground | 1B |
| 20 | | GND | Ground | 1B |
| 21 | CML-O | Rx2n | Receiver Inverted Data Output | 3B |
| 22 | CML-O | Rx2p | Receiver Non-Inverted Data Output | 3B |
| 23 | | GND | Ground | 1B |
| 24 | CML-O | Rx4n | Receiver Inverted Data Output | 3B |
| 25 | CML-O | Rx4p | Receiver Non-Inverted Data Output | 3B |
| 26 | | GND | Ground | 1B |
| 27 | LVTTL-O | ModPrsL | Module Present | 3B |
| 28 | LVTTL-O | IntL | Interrupt | 3B |
| 29 | | VccTx | +3.3V Power supply transmitter | 2B |
| 30 | | Vcc1 | +3.3V Power supply | 2B |
| 31 | LVTTL-I | InitMode | Initialization mode; In legacy QSFP applications, the InitMode pad is called LPMODE | 3B |
| 32 | | GND | Ground | 1B |
| 33 | CML-I | Tx3p | Transmitter Non-Inverted Data Input | 3B |


| | | | | |
|----|-------|----------|-------------------------------------|----|
| 34 | CML-I | Tx3n | Transmitter Inverted Data Input | 3B |
| 35 | | GND | Ground | 1B |
| 36 | CML-I | Tx1p | Transmitter Non-Inverted Data Input | 3B |
| 37 | CML-I | Tx1n | Transmitter Inverted Data Input | 3B |
| 38 | | GND | Ground | 1B |
| 39 | | GND | Ground | 1A |
| 40 | CML-I | Tx6n | Transmitter Inverted Data Input | 3A |
| 41 | CML-I | Tx6p | Transmitter Non-Inverted Data Input | 3A |
| 42 | | GND | Ground | 1A |
| 43 | CML-I | Tx8n | Transmitter Inverted Data Input | 3A |
| 44 | CML-I | Tx8p | Transmitter Non-Inverted Data Input | 3A |
| 45 | | GND | Ground | 1A |
| 46 | | Reserved | For future use | 3A |
| 47 | | VS1 | Module Vendor Specific 1 | 3A |
| 48 | | VccRx1 | 3.3V Power Supply | 2A |
| 49 | | VS2 | Module Vendor Specific 2 | 3A |
| 50 | | VS3 | Module Vendor Specific 3 | 3A |
| 51 | | GND | Ground | 1A |
| 52 | CML-O | Rx7p | Receiver Non-Inverted Data Output | 3A |
| 53 | CML-O | Rx7n | Receiver Inverted Data Output | 3A |
| 54 | | GND | Ground | 1A |
| 55 | CML-O | Rx5p | Receiver Non-Inverted Data Output | 3A |
| 56 | CML-O | Rx5n | Receiver Inverted Data Output | 3A |
| 57 | | GND | Ground | 1A |
| 58 | | GND | Ground | 1A |
| 59 | CML-O | Rx6n | Receiver Inverted Data Output | 3A |
| 60 | CML-O | Rx6p | Receiver Non-Inverted Data Output | 3A |
| 61 | | GND | Ground | 1A |
| 62 | CML-O | Rx8n | Receiver Inverted Data Output | 3A |
| 63 | CML-O | Rx8p | Receiver Non-Inverted Data Output | 3A |
| 67 | | GND | Ground | 1A |
| 68 | | NC | No Connect | 3A |
| 69 | | Reserved | For future use | 3A |
| 70 | | VccTx1 | 3.3V Power Supply | 2A |
| 71 | | Vcc2 | 3.3V Power Supply | 2A |
| 72 | | Reserved | For Future Use | 3A |
| 73 | | GND | Ground | 1A |
| 74 | CML-I | Tx7p | Transmitter Non-Inverted Data Input | 3A |
| 75 | CML-I | Tx7n | Transmitter Inverted Data Input | 3A |
| 76 | | GND | Ground | 1A |

Electrical Pad Layout

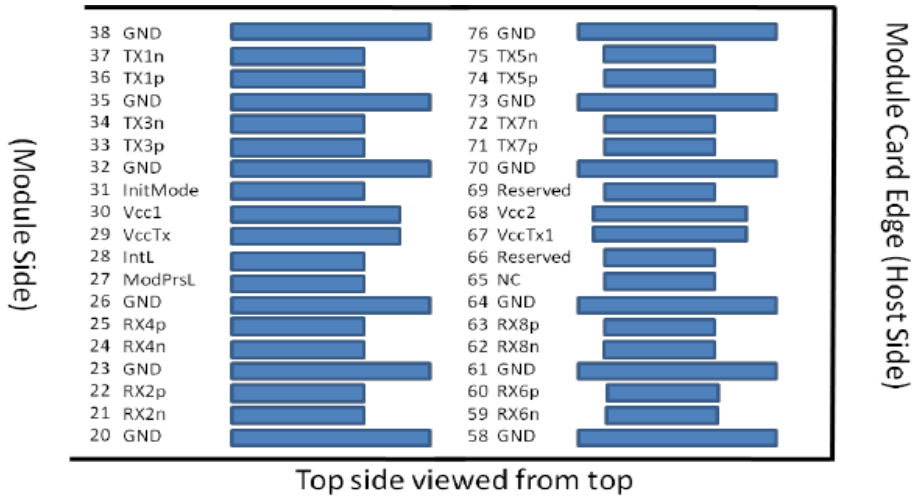

Top side viewed from top


Legacy QSFP28 Pads Additional QSFP-DD Pads

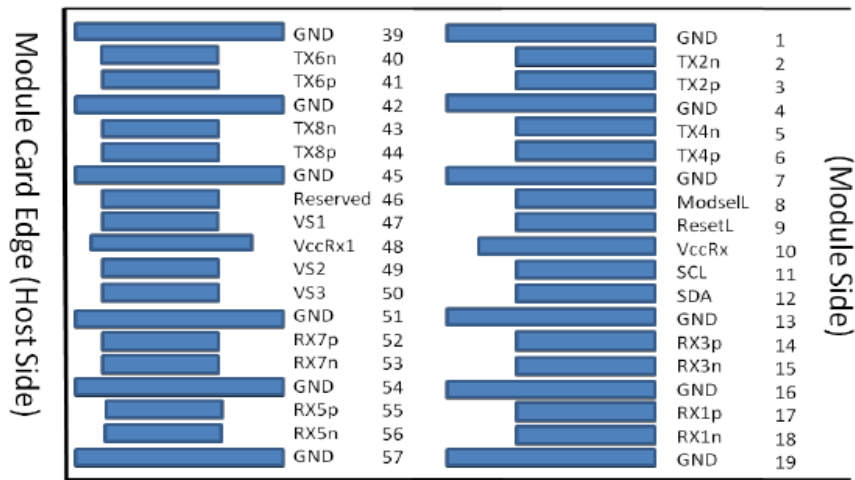


Bottom side viewed from bottom

Additional QSFP-DD Pads Legacy QSFP28 Pads

Recommended Power Supply Filter

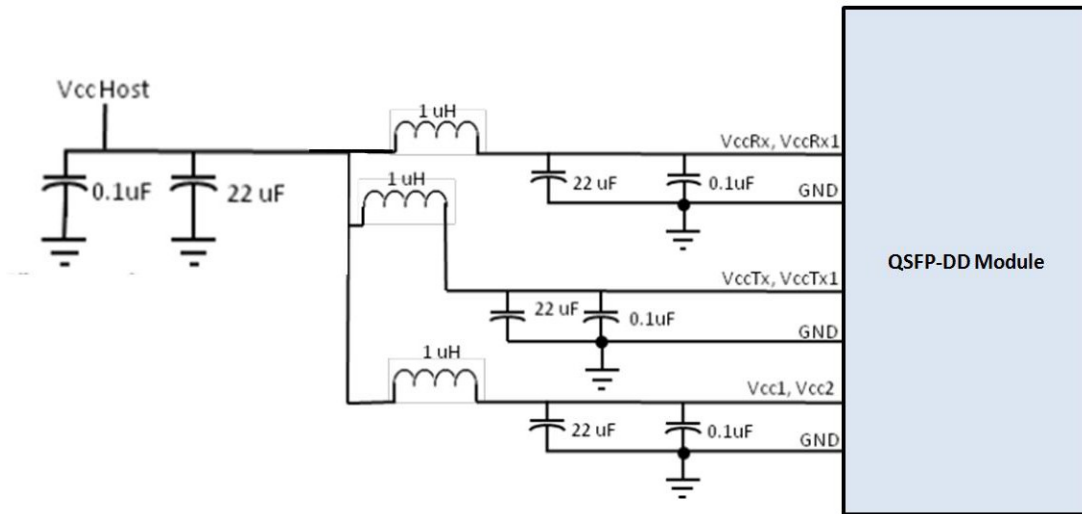

Mechanical Specifications

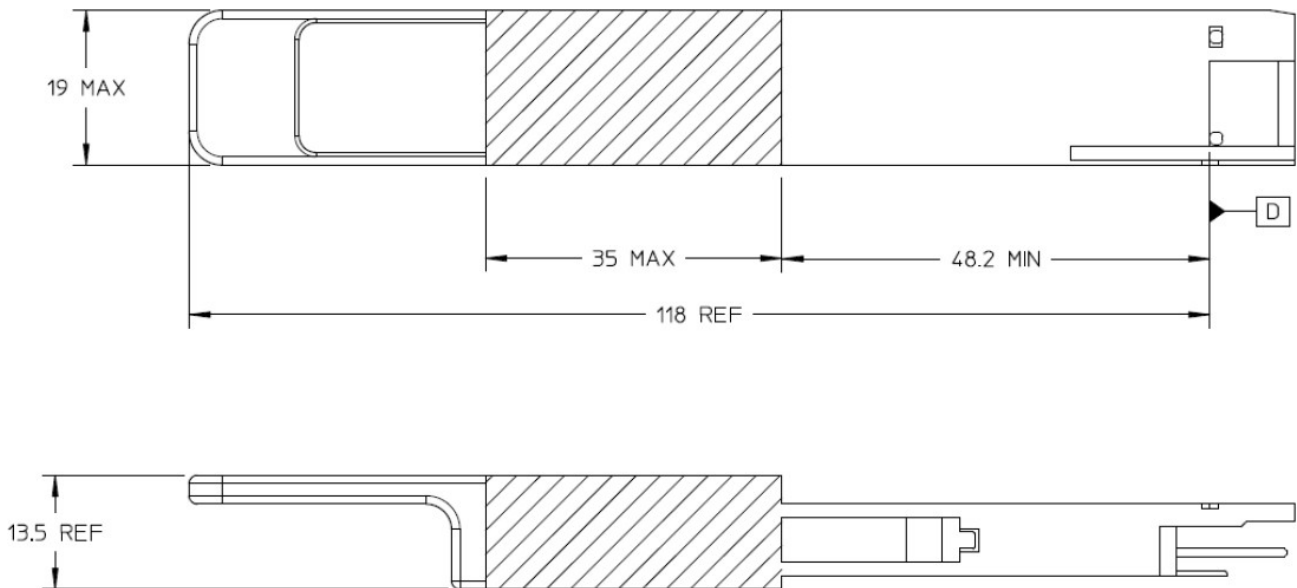

About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.

U.S. Headquarters

Email: sales@addonnetworks.com

Telephone: +1 877.292.1701

Fax: 949.266.9273

Europe Headquarters

Email: salesupportemea@addonnetworks.com

Telephone: +44 1285 842070