


USB-C Multiport Adapter - HDMI & VGA - 3 x USB - SD/uSD - GbE- 100W

Product Diagram (DKT30CHVSDPD)

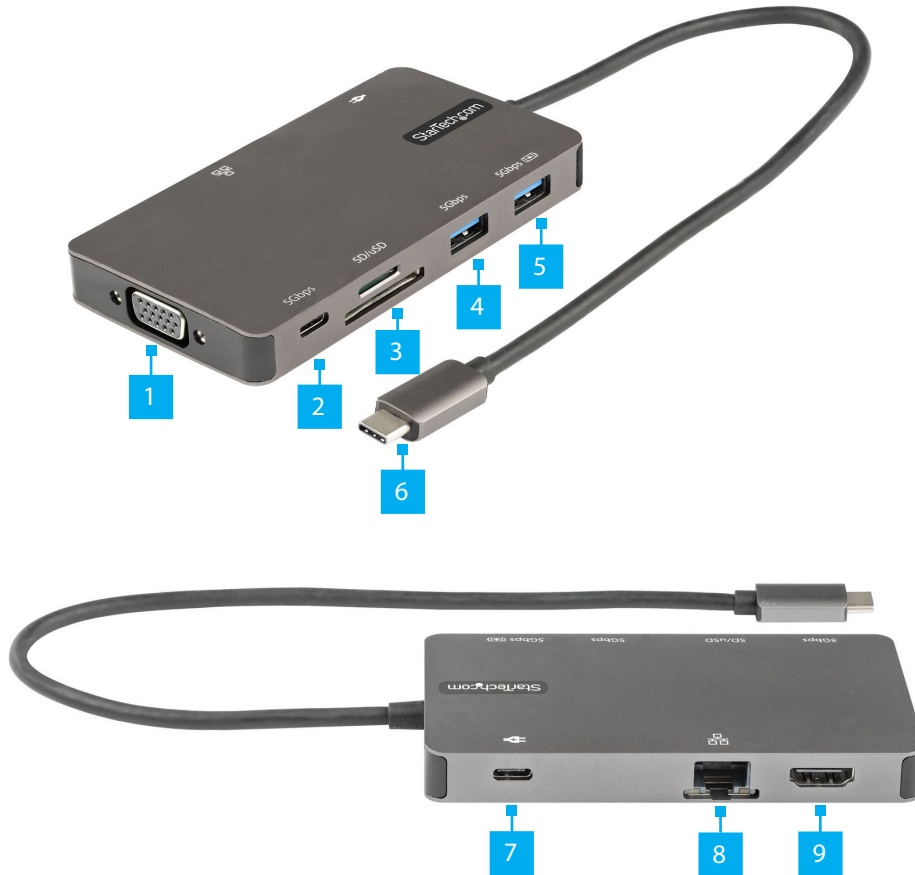

Port	Function
1	VGA Output Port <ul style="list-style-type: none"> Resolution of up to 1920x1080 60Hz Connect the Multiport Adapter to a VGA Display Device, using a VGA Cable
2	USB-C Data Port <ul style="list-style-type: none"> SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Connect a USB-C Peripheral Device to the USB-C Multiport Adapter
3	Micro SD-Card Slot (Top) SD-Card Slot (Bottom) <ul style="list-style-type: none"> Supports Secure Digital (SD) v3.0 UHS-I SD and Micro SD cards can transfer data simultaneously
4	USB-A Device Port <ul style="list-style-type: none"> SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Connect a USB Peripheral Device to the USB-C Multiport Adapter
5	USB-A Charging Port <ul style="list-style-type: none"> SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Connect a USB-A Peripheral Device to the USB-C Multiport Adapter Fast-charge USB Peripheral Devices that comply with USB Battery Charging specification Revision 1.2 Supports up to 5V at 1.5A, 7.5W charging
6	USB-C Host Connector <ul style="list-style-type: none"> SuperSpeed USB 5Gbps (USB 3.2 Gen 1) USB Power Delivery (PD) 3.0 DP 1.2 Alt Mode Charge the Host Device while using the USB-C Multiport Adapter (Max 85W Available to the Host) Connect the Multiport Adapter to a Laptop, using the SuperSpeed USB-C Host Connector
7	USB-C Power Delivery Passthrough Port <ul style="list-style-type: none"> USB Power Delivery (PD) 3.0 Connect a USB-C Charger of up to 100W to charge the Host Laptop
8	RJ45 Port <ul style="list-style-type: none"> 10/100/1000 Mbps Connect the Multiport Adapter to a Network Device, using a Network Cable
9	HDMI <ul style="list-style-type: none"> Resolutions of up to 4K 30hz Connect the Multiport Adapter to an HDMI Enabled Display Device, using an HDMI Cable

Product Information

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:

www.StarTech.com/DKT30CHVSDPD

Requirements

- Host Computer with USB-C Port
 - DP-Alt Mode Compatible
 - USB Power Delivery Support

For the latest requirements, please visit www.startech.com/DKT30CHVSDPD

USB Power Delivery 3.0

Fast Role Swap:

A Fast Role Swap function is available when using Power Delivery 3.0. This function prevents USB data disruption when switching power sources (bus power to USB-C power adapter or USB-C power adapter to bus power). For this function to work, the host laptop must also support Power Delivery 3.0.

Regulatory Compliance

FCC - Part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Power the USB-C Multiport Adapter

USB Bus Power Mode (from Laptop):

The **USB-C Multiport Adapter** can be powered by the **Host Computer's USB-C Port** and does not require a separate power adapter for most device connections.

USB Power Delivery Pass Through Mode:

To charge a **Laptop** through the **USB-C Multiport Adapter**, or to supply additional power to support a **USB Device** requiring more power, follow these steps:

1. Connect the **USB-C Multiport Adapter** to a **USB-C Port** on the **Host Computer** using the **USB-C Host Connector**.
2. Connect the **USB-C Connector** from the **Host Computer's Power Adapter** to the **USB-C Power Delivery Passthrough Port** (See Port 7 in Diagram) on the **USB-C Multiport Adapter**.
3. The **Host Computer's Power Adapter** will power the **USB-C Multiport Adapter** and pass power through to the **Host Computer**.

Operation

Connecting a Display to the Docking Station

This **USB-C Multiport Adapter** supports a single display via **HDMI** or **VGA** output. If more than one **Display** is connected to the **USB-C Multiport Adapter**, only the HDMI port will output video.

RJ45 Port LED Indicators

LED Colour	Status	Indication
Orange	Solid	Link speed is either 1000Mbps (1 GbE), 100Mbps, or 10Mbps
	Off	No connection established
White	Flashing	Network traffic detected
	Off	No activity / No link established

Warranty Information

This product is backed by a three-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

StarTech.com Ltd.

45 Artisans Cres
London, Ontario
N5V 5E9
Canada

StarTech.com LLP

4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.

Unit B, Pinnacle 15
Gowerton Rd,
Brackmills
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.

Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

FR: startech.com/fr

DE: startech.com/de

ES: startech.com/es

NL: startech.com/nl

IT: startech.com/it

JP: startech.com/jp