

# Acer LCD Monitor

## User Guide

Copyright © 2024. Acer Incorporated.  
All Rights Reserved.

Acer LCD Monitor User Guide  
Original Issue: 02/2024

Changes may be made periodically to the information in this publication without obligation to notify any person of such revisions or changes. Such changes will be incorporated in new editions of this manual or supplementary documents and publications. This company makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims the implied warranties of merchantability or fitness for a particular purpose.

Record the model number, serial number, purchase date and place of purchase information in the space provided below. The serial number and model number are recorded on the label affixed to your computer. All correspondence concerning your unit should include the serial number, model number and purchase information.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronically, mechanically, by photocopy, recording or otherwise, without the prior written permission of Acer Incorporated.

#### Acer LCD Monitor User Guide

Model number: \_\_\_\_\_

Serial number: \_\_\_\_\_

Date of purchase: \_\_\_\_\_

Place of purchase: \_\_\_\_\_

Acer and the Acer logo are registered trademarks of Acer Incorporated. Other companies' product names or trademarks are used herein for identification purposes only and belong to their respective companies.

# Information for your safety and comfort

## Safety instructions

Read these instructions carefully. Keep this document for future reference. Follow all warnings and instructions marked on the product.

## Special notes on LCD monitors

The following are normal with the LCD monitor and do not indicate a problem.

- Due to the nature of the fluorescent light, the screen may flicker during initial use. Turn off the power switch and then turn it on again to make sure the flicker disappears.
- You may find slightly uneven brightness on the screen depending on the desktop pattern you use.
- The LCD screen has 99.99% or more effective pixels. It may include blemishes of 0.01% or less such as a missing pixel or pixel lit all the time.
- Due to the nature of the LCD screen, an afterimage of the previous screen may remain after switching the image, when the same image is displayed for hours. In this case, the screen is recovered slowly by changing the image or turning off the power switch for a few hours.

## Cleaning your monitor

Please carefully follow these guidelines when cleaning the monitor:

- Always unplug the monitor before cleaning.
- Use a soft cloth to wipe the screen and cabinet front and sides.

## Recycling Information for the United States of America

Acer encourages information technology (IT) equipment owners to responsibly recycle their equipment when it is no longer needed. Acer offers programs and services to assist equipment owners with this process.

For more information on recycling IT equipment, please go to:

<https://www.acer.com/ac/en/US/content/recycling>

## Accessibility

Make sure that the power outlet is close to the device operator and convenient for plugging and pulling of the power adapter (power cord). Make sure to unplug the power adapter (power cord) from the power outlet when disconnection of power is necessary.

## Safe listening

To protect your hearing, follow these instructions.

- Gradually increase the volume until you can hear it clearly and comfortably and without distortion.
- After setting the volume level, do not increase it after your ears have adjusted.
- Limit the amount of time listening to music at high volume.
- Avoid turning up the volume to block out noisy surroundings.
- Turn the volume down if you can't hear people speaking near you.

## Warnings

- Do not use this product near water.
- Do not place this product on an unstable cart, stand or table. If the product falls, it could be seriously damaged.
- Slots and openings are provided for ventilation to ensure reliable operation of the product and to protect it from overheating. These openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug or other similar surface. This product should never be placed near or over a radiator or heat register, or in a built-in installation unless proper ventilation is provided.
- Never push objects of any kind into this product through cabinet slots as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Never spill liquid of any kind onto or into the product.
- To avoid damage of internal components and to prevent battery leakage, do not place the product on a vibrating surface.
- Never use it under sporting, exercising, or any vibrating environment which will probably cause unexpected short current or damage internal devices.

## Using electrical power

- This product should be operated from the type of power indicated on the marking label. If you are not sure of the type of power available, consult your dealer or local power company.
- Avoid placing anything on the power adapter (power cord), or placing the device in any position where the power adapter (power cord) will be stepped on.



- If an extension cord is used with this product, make sure that the total ampere rating of the equipment plugged into the extension cord does not exceed the extension cord ampere rating. Also, make sure that the total rating of all products plugged into the wall outlet does not exceed the fuse rating. (For monitors with power cords)
- Do not overload a power outlet, strip or receptacle by plugging in too many devices. The overall system load must not exceed 80% of the branch circuit rating. If power strips are used, the load should not exceed 80% of the power strip's input rating.
- A two-wire grounding plug is supplied for the power cord of the device, which shall only be plugged into a grounded power outlet. Make sure that the power outlet is properly grounded before plugging in. Do not plug into any ungrounded power outlet. Please contact an electrician for details (For monitors with power cords).



.....

**Warning! The grounding pin is a safety feature. Using a power outlet that is not properly grounded may result in electric shock and/or injury.**



.....

**Note:** The grounding pin also provides good protection from unexpected noise produced by other nearby electrical devices that may interfere with the performance of this product.

- Always use the power adapter (power cord) kit supplied.

## Product servicing

Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage points or other risks. Refer all servicing to qualified service personnel.

Pull out the power adapter (power cord) of the device in any of the following cases, and contact qualified service personnel for maintenance:

- Damaged or worn plug of the power adapter (power cord)
- liquid was spilled into the product
- the product was exposed to rain or water
- the product has been dropped or the case has been damaged
- the product exhibits a distinct change in performance, indicating a need for service
- the product does not operate normally after following the operating instructions



**Note:** Adjust only those controls that are covered by the operating instructions, since improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to normal condition.

## Potentially explosive environments

Switch off your device in any area with a potentially explosive atmosphere and obey all signs and instructions. Potentially explosive atmospheres include areas where you would normally be advised to turn off your vehicle engine. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death. Switch off the device near gas pumps at service stations. Observe restrictions on the use of radio equipment in fuel depots, storage and distribution areas; chemical plants; or where blasting operations are in progress. Areas with a potentially explosive atmosphere are often, but not always, marked. They include below deck on boats, chemical transfer or storage facilities, vehicles using liquefied petroleum gas (such as propane or butane), and areas where the air contains chemicals or particles such as grain, dust or metal powders.

## Additional safety information

Your device and its enhancements may contain small parts. Keep them out of the reach of small children.

## IT Equipment Recycling Information

Acer is strongly committed to environmental protection and views recycling, in the form of salvaging and disposal of used equipment, as one of the company's top priorities in minimizing the burden placed on the environment.

We at Acer are very conscious of the environmental effects of our business and strive to identify and provide the best working procedures to reduce the environmental impact of our products.

For more information and help when recycling, please go to this website:

<https://www.acer-group.com/sustainability/en/our-products-environment.html>

Visit [www.acer-group.com](http://www.acer-group.com) for further information on the features and benefits of our other products.

## Disposal instructions



Do not throw this electronic device into the trash when discarding.

To minimize pollution and ensure utmost protection of the global environment, please recycle. For more information on the Waste from Electrical and Electronics Equipment (WEEE) regulations, visit

<https://www.acer-group.com/sustainability/en/our-products-environment.html>

Acer monitor is purposed for video and visual display of information obtained from electronic devices.

## LCD pixel statement

The LCD unit is produced with high-precision manufacturing techniques. Nevertheless, some pixels may occasionally misfire or appear as black or red dots. This has no effect on the recorded image and does not constitute a malfunction.

Built-in power management of the device:

- The LCD monitor enters "sleep" mode if there is no signal in 10 seconds.

## Tips and information for comfortable use

Computer users may complain of eyestrain and headaches after prolonged use. Users are also at risk of physical injury after long hours of working in front of a computer work periods, bad posture, poor work habits, stress, inadequate working conditions, personal health and other factors greatly increase the risk of physical injury

Incorrect computer usage may lead to carpal tunnel syndrome, tendonitis, tenosynovitis or other musculoskeletal disorders. The following symptoms may appear in the hands, wrists, arms, shoulders, neck or back:

- numbness, or a burning or tingling sensation
- aching, soreness or tenderness
- pain, swelling or throbbing
- stiffness or tightness
- coldness or weakness

If you have these symptoms, or any other recurring or persistent discomfort and/or pain related to computer use, consult a physician immediately and inform your company's health and safety department.

The following section provides tips for more comfortable computer use.

### Finding your comfort zone

Find your comfort zone by adjusting the viewing angle of the monitor or raising your sitting height to achieve maximum comfort. Observe the following tips:

- refrain from staying too long in one fixed posture
- avoid slouching forward and/or leaning backward
- stand up and walk around regularly to remove the strain on your leg muscles

### Taking care of your vision

Long viewing hours, wearing incorrect glasses or contact lenses, glare, excessive room lighting, poorly focused screens, very small typefaces and low-contrast displays could stress your eyes. The following sections provide suggestions on how to reduce eyestrain.

Eyes

- Rest your eyes frequently.
- Give your eyes regular breaks by looking away from the monitor and focusing on a distant point.
- Blink frequently to keep your eyes from drying out.

## Display

- Keep your display clean.
- Keep your head at a higher level than the top edge of the display so your eyes point downward when looking at the middle of the display.
- Adjust the display brightness and/or contrast to a comfortable level for enhanced text readability and graphics clarity.
- Eliminate glare and reflections by:
  - placing your display in such a way that the side faces the window or any light source
  - minimizing room light by using drapes, shades or blinds
  - using a task light
  - changing the display's viewing angle
  - using a glare-reduction filter
  - using a display visor, such as a piece of cardboard extended from the display's top front edge
- Avoid adjusting your display to an awkward viewing angle.
- Avoid looking at bright light sources, such as open windows, for extended periods of time.

## Developing good work habits

Develop the following work habits to make your computer use more relaxing and productive:

- Take short breaks regularly and often.
- Perform some stretching exercises.
- Breathe fresh air as often as possible.
- Exercise regularly and maintain a healthy body.

### ENERGY STAR®

Acer's ENERGY STAR qualified products save you money by reducing energy costs and helps protect the environment without sacrificing features or performance. Acer is proud to offer our customers products with the ENERGY STAR mark.



### What is ENERGY STAR?

Products that are ENERGY STAR qualified use less energy and prevent greenhouse gas emissions by meeting strict energy efficiency guidelines set by the U.S. Environmental Protection Agency. Acer is committed to offer products and services worldwide that help customers save money, conserve energy and improve the quality of our environment. The more energy we can save through energy efficiency, the more we reduce greenhouse gases and the risks of climate change. More information refers to <http://www.energystar.gov>.

### Acer ENERGY STAR qualified products:

- Produce less heat and reduce cooling loads, and warmer climates.
- Automatically go into "display sleep" within 5 minutes of inactivity.
- Wake the monitor when it is in Active Off mode, move the mouse or press any keyboard key.

ENERGY STAR and the ENERGY STAR mark are registered U.S. marks

### Adjusting the OSD settings



Note: The following content is for general reference only. Actual product specifications may vary.



Note: This product qualifies for ENERGY STAR in the "factory default" setting and this is the setting in which power savings will be achieved. Changing the factory default picture settings or enabling other features will increase power consumption that could exceed the limits necessary to qualify for ENERGY STAR rating.



## EU Declaration of Conformity

We,  
**Acer Incorporated**  
8F, 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City 221

And,  
**Acer Italy s.r.l.**  
Viale delle Industrie 1/A, 20044 Arese (MI), Italy  
Tel: +39-02-939-921 ,Fax: +39-02 9399-2913  
www.acer.it

**Product:** LCD Monitor  
**Trade Name:** ACER  
**Model Number:** V206Q  
**SKU Number:** V206Q xxxxxxxx  
("x" = 0~9, a~z, A~Z, or blank)

We, Acer Incorporated, hereby declare under our sole responsibility that the product described above is in conformity with the relevant Union harmonization legislations as below Directive and following harmonized standards and/or other relevant standards have been applied:

- EMC Directive: 2014/30/EU**

<input checked="" type="checkbox"/> EN55032:2015+AC:2020 Class B	<input checked="" type="checkbox"/> EN 55035:2017+A11: 2020
<input checked="" type="checkbox"/> EN IEC 61000-3-2:2019 Class D	<input checked="" type="checkbox"/> EN61000-3-3:2013+A1: 2019

- LVD Directive: 2014/35/EU**

<input checked="" type="checkbox"/> EN 62368-1: 2014+ A11:2017
--

- RoHS Directive: 2011/65/EU**

<input checked="" type="checkbox"/> EN IEC 63000:2018
---

- ErP Directive: 2009/125/EC**

<input checked="" type="checkbox"/> (EU) 2019/ 2021; EN 50564:2011
--

Year to begin affixing CE marking: 2022.

\_\_\_\_\_  
**RU Jan / Sr. Manager**  
**Acer Incorporated (New Taipei City)**

**Aug. 8, 2022**  
Date



**Acer America Corporation**  
333 West San Carlos St., San Jose  
Suite 1500  
CA 95110, U. S. A.  
Tel : 254-298-4000  
Fax : 254-298-4147  
www.acer.com



## Federal Communications Commission Declaration of Conformity

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) this device may not cause harmful interference, and (2) this device must accept any interference received,  
including interference that may cause undesired operation.

The following local Manufacturer /Importer is responsible for this declaration:

<b>Product:</b>	<b>LCD Monitor</b>
<b>Model Number:</b>	<b>V206Q</b>
<b>SKU Number:</b>	<b>V206Q   xxxxxx</b> <b>("x" = 0~9, a~z, A~Z, or blank)</b>
<b>Name of Responsible Party:</b>	<b>Acer America Corporation</b>
<b>Address of Responsible Party:</b>	<b>333 West San Carlos St.</b> <b>Suite 1500</b> <b>San Jose, CA 95110</b> <b>U. S. A.</b>
<b>Contact Person:</b>	<b>Acer Representative</b>
<b>Phone No.:</b>	<b>254-298-4000</b>
<b>Fax No.:</b>	<b>254-298-4147</b>

# Contents

Special notes on LCD monitors	iii
Information for your safety and comfort	iii
Safety instructions	iii
Cleaning your monitor	iii
Connecting/disconnecting the device	iii
Accessibility	iv
Safe listening	iv
Warnings	iv
Using electrical power	iv
Product servicing	v
Potentially explosive environments	vi
Additional safety information	vi
IT Equipment Recycling Information	vi
Disposal instructions	vi
LCD pixel statement	vii
Tips and information for comfortable use	vii
Finding your comfort zone	vii
Taking care of your vision	viii
Developing good work habits	viii
Federal Communications Commission	
Declaration of Conformity	x
<b>Unpacking</b>	<b>1</b>
Installation instructions	2
Screen position adjustment	3
Connect power adapter (power cord)	3
Power saving	3
Display Data Channel (DDC)	4
Connector pin assignment	4
15-pin color display signal cable	4
19-pin color display signal cable	4
<b>Standard timing table</b>	<b>5</b>
<b>Installation</b>	<b>6</b>
<b>Users controls</b>	<b>7</b>
External controls	7
Using the Shortcut Menu	8
The Function page	9
<b>Troubleshooting</b>	<b>13</b>
HDMI Mode (Optional)	13
VGA Mode (Optional)	14


# Unpacking

Please check that the following items are present when you unpack the box, and save the packing materials in case you need to ship or transport the monitor in the future.

LCD monitor




Quick start guide




Power cord



HDMI cable  
(Optional)





VGA cable  
(Optional)




Product Information for EU Energy Label





# Installation instructions

<p>1</p>  <p>Take the device out from packing polyton.</p>	<p>2</p>  <p>Fit the stand and base together as shown in the illustration.</p>
---	---


<p>3</p>  <p>Insert the stand into the slot of the device as shown in the illustration.</p>
--

## Disassembly

<p>1</p>  <p>Press "OPEN" here and pull down to disassemble the stand from device.</p>	<p>2</p>  <p>Pull in the direction as shown in the illustration to separate the base from the stand.</p>
--	--

## Screen position adjustment

To optimize the viewing position, you can adjust the monitor tilt, using both of your hands to hold the edges of the monitor. The screen can be adjusted by inclining with both hands to optimize the view as shown below. Generally, it can be adjusted up to 15 degrees backward and up to 5 degrees forward.



## Connect power adapter (power cord)

The power adapter (power cord) applies universal power supply. AC 100-240v50/60Hz voltage range is applicable without user adjustment.

## Power saving

The monitor will be switched to "power saving" mode by the control signal from the display controller, as indicated by the white light.


Mode	LED light
On	Lighting
Standby/Power saving	flicker

The power-saving state is maintained until the control signal is detected or the keyboard or mouse is used. It takes about 3-4 seconds to recover from the active "sleep" mode to "power on".

## Display Data Channel (DDC)

To make installation easier, so long as your system supports the DDC protocol, the monitor is able to plug-and-play. The DDC is a communication protocol through which the monitor automatically informs the host system about its capabilities; for example, supported resolutions and corresponding timing. The monitor supports the DDC2B standard.


### Connector pin assignment



#### 15-pin color display signal cable

PIN No.	Description	PIN No.	Description
1	Red	9	+5 V
2	Green	10	Logic ground
3	Blue	11	Monitor ground
4	Monitor ground	12	DDC-serial data
5	DDC-return	13	H-sync
6	R-ground	14	V-sync
7	G-ground	15	DDC-serial clock
8	B-ground		

#### 19-pin color display signal cable




PIN No.	Description	PIN No.	Description
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	Reserved (N.C. on device)
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		

# Standard timing table

Mode	Resolution	
VGA	640x480	60Hz
	640x480	72Hz
	640x480	75Hz
VESA	720x400	70Hz
SVGA	800x600	60Hz
	800x600	72Hz
	800x600	75Hz
XGA	1024x768	60Hz
	1024x768	70Hz
	1024x768	75Hz
VESA	1280x720	60Hz
WXGA	1280x800	60Hz
	1360x768	60Hz
WXGA+	1600x900	60Hz
	1600x900	75Hz

# Connect the LCD monitor to PC

1. Power off the monitor and unplug the power source of the PC.
2. Connect the signal cable:
  - a. Make sure the monitor and PC are powered off;
  - b. Connect the signal cable to the PC.
3. Connect one end of the power cable into the AC port of the monitor.
4. Connect the power cords of the PC and the monitor into a power outlet nearby.

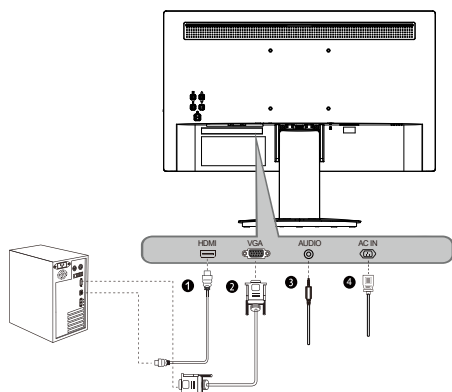

Overview of monitor IN ports


1	HDMI port
2	VGA port
3	AUDIO port (Optional)
4	AC port

Notice: Specific interfaces and signal lines are based on actual conditions.





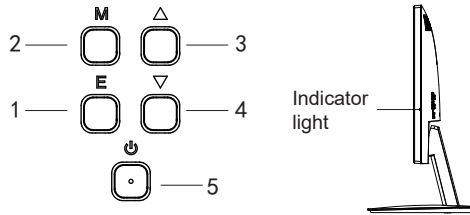

Note: Audio output is only for audio output model. Please check user manual for more instruction.

# Users controls



## External Controls

No.	Icon	Item	Description
1		Mode/Exit	<p>a. Press to view Main page. Press again to enter mode select function.</p> <p>b. When the Function Menu is active. Press to return previous Menu or exit current Menu.</p>
2		Brightness/Enter	<p>a. Press to view Main page. Press again to enter brightness adjustment function.</p> <p>b. When the Function Menu is active, this button will enter a selection in the OSD.</p>
3		Input/+	<p>a. Press to view Main page. Press again to enter Input select function.</p> <p>b. When the Function Menu is active, press this button selected or move to the previous function.</p>
4		Menu/-	<p>a. Press to view Main page. Press again to enter next function in the Function Menu.</p> <p>b. When the Function Menu is active, press this key selected or move to the next function.</p>
5	POWER	Power button	Power on/off the monitor. It indicates power on if the light remains on. It indicates stand-by/power-saving mode if the light flashes.

# Using the Shortcut Menu




**Note:** The following content is for general reference only. Actual product specifications may vary.


The OSD (on-screen display) can be used to adjust the settings of your LCD monitor. Press the MENU key to open the OSD. You can use the OSD to adjust the picture quality and general settings. For advanced settings, please refer to following page:

## Main page




## Mode adjustment

open the mode adjustment hotkey to set the display scene mode, after completion, use  to exit Menu.

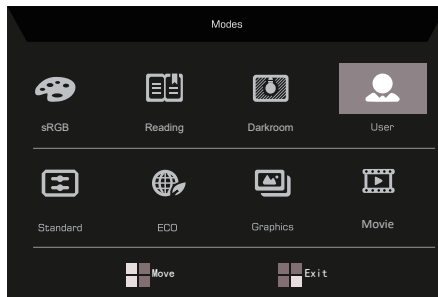


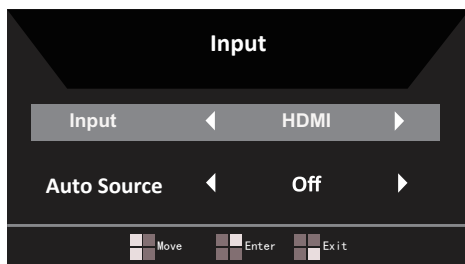
## Adjusting the Brightness

Open the Brightness control and set the Brightness using the  . When you are done, use  to exit Menu.

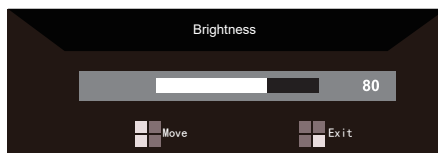



## Select input

Open the Input control and select VGA or HDMI input source, When you are done, use  to exit Menu.







## The Function page

Open the Function page to adjust picture, color, OSD, system and information, and use  to set the desired settings.

When you are done, use  to go back one level or exit Menu .
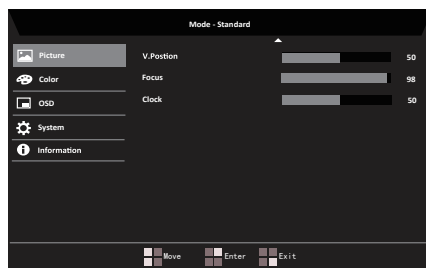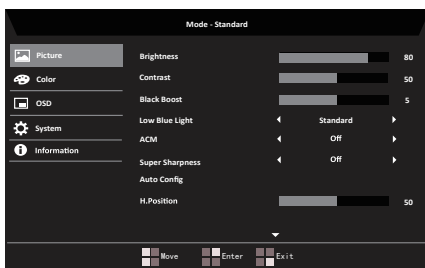
## Picture



1. Press the **MENU** key to open the OSD.
2. Using the  keys, select Picture from the OSD. Then navigate to the picture element you wish to adjust.
3. Use the  keys to adjust the sliding scales.
4. The Picture menu can be used to adjust brightness, contrast, black boost, low blue light, ACM, super sharpness, auto configuration and horizontal position.



**Note:** Only VGA supports auto configuration and horizontal position.

5. Brightness: Adjust the brightness from 0 to 100.



**Note:** Adjusts the balance between light and dark shades.

6. Contrast: Adjust the contrast from 0 to 100.



**Note:** Sets the degree of difference between light and dark areas.



7. **Black Boost:** Adjust the black level from 0 to 10. Enhances shadows by increasing the brightness without changing lighter shades.



.....

**Note:** If the image is very bright or has few shadow areas, adjusting this setting may not result in any noticeable changes to the image.

8. **Low Blue Light:** Filters out blue light to protect your eyes by adjusting how much blue light is shown -- Standard / Level 1 / Level 2 / Level 3 / Level 4.









.....

**Note:** Higher values allow more blue light through. For the best protection select a lower value.

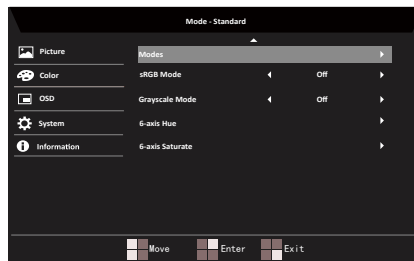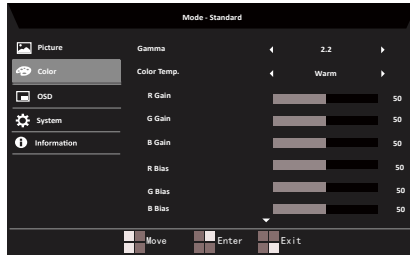9. **ACM:** Turn ACM on or off. The default is off.
10. **Super Sharpness:** Turn the Super Sharpness On or Off. Super Sharpness technology can simulate high-resolution images by boosting the pixel density of the original source to make images sharper and clearer.


## Color






1. Press the **MENU** key to open the OSD.
2. Using the   keys, select Color from the OSD. Then navigate to the color element you wish to adjust.
3. Use the   keys to select setting.
4. Gamma mode allows you to adjust the luminance tone. The default value is 2.2 (standard value for Windows).
5. Color Temperature: Default is warm. You can choose Cool, Normal, Warm, Low Blue Light or User.
6. Modes: Modes are available from sRGB, Reading, Darkroom, User, Standard, ECO, Graphics, Movie.


7. SRGB: default is off. You can turn sRGB on or off for better color matching with peripherals (eg. Printers and digital cameras)
8. Grayscale Mode: Turn grayscale mode On or Off. The default is off.
9. 6-axis Hue: Adjust the red, green, blue, yellow, magenta and cyan hue.
10. 6-axis Saturate: Adjust the red, green, blue, yellow, magenta and cyan saturation.

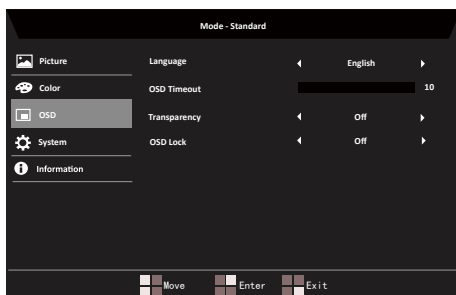

## OSD



1. Press the **MENU** key to open the OSD.
2. Using the  keys, select OSD from the OSD. Then navigate to the OSD element you wish to adjust.
3. Use the  keys to adjust any sliding scales.
4. Language: Set the OSD menu language.
5. OSD Display time setting: Adjust the delay before turning off the OSD menu.
6. Transparency: Select the transparency when using gaming mode. The transparency can be 0% (OFF), 20%, 40%, 60%, or 80%.
7. OSD Lock: OSD interface Lock and POWER Lock. Long press  key 3S to unlock.
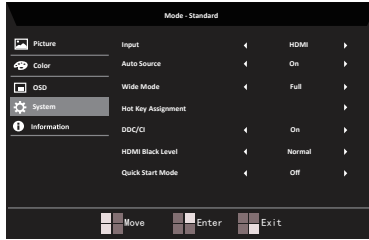
# System




1. Press the MENU key to open the OSD.
2. Using the  keys, select Setting from the OSD. Then navigate to the system element you wish to adjust.
3. Use the  keys to select the setting.
4. Input: Select the source from VGA or HDMI.
5. Auto Source: Automatically searches for available input sources.
6. Wide Mode: You can select which screen aspect you are using. The options are Aspect and Full.
7. Hot Key Assignment: User can assign different function ( Brightness/Input/Gamma/contrast/Bluelight) to User Define Key: Key1 & Key2.
8. DDC/CI: Allows the monitor settings to be set through the software on the PC.




.....  
**Note:** DDC/CI, short for Display Data Channel/Command Interface, which allows monitor controls to be sent via software.


9. HDMI Black Level: Users can select the level of blackness under HDMI source. The options are Normal and Low.
10. Quick Start Mode: The default is "Off". Turn on to speed up boot speed.

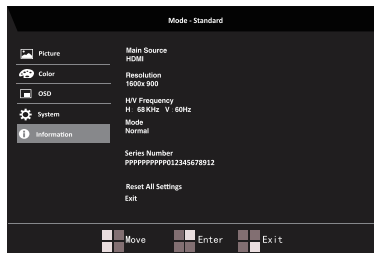

## Information



1. Press the **MENU** key to open the OSD.
2. Using the  keys, select Information to view the basic information for your monitor and current input.
3. Reset all settings: Reset the custom color settings to factory defaults.
4. Exit: Exit OSD menu.
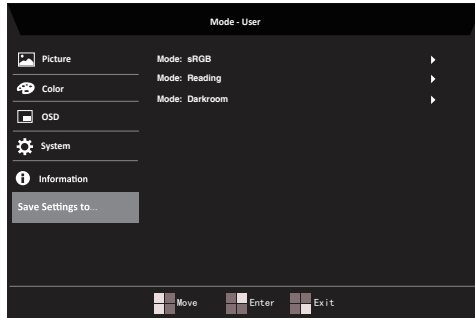
## Save Setting to...(User mode only)



1. Press the **MENU** key to open the OSD.
2. Use the  keys to select "Save Settings to..." from the OSD. Then navigate to the element you wish to adjust and press the  to enter it.
3. Save the settings to sRGB/reading/darkroom mode.

## Troubleshooting

Before sending your LCD monitor for servicing, please check the troubleshooting list

### HDMI Mode (Optional)

Problem	LED status	Remedy
No picture visible	Remain on	Using the OSD menu, adjust brightness and contrast to maximum or reset to their default settings.
	Light off	Check the power switch.  Check if the power cord is properly connected to the monitor.
	flicker	Check if the video signal cable is properly connected at the back of monitor.  Check if the computer system is switched on and in power saving/standby mode.

## VGA Mode (Optional)

Problem	LED status	Remedy
No picture visible	Remain on	Using the OSD menu, adjust brightness and contrast to maximum or reset to their default settings.
	Light off	Check the power switch.  Check if the power cord is properly connected to the monitor.
	flicker	Check if the video signal cable is properly connected at the back of monitor.  Check if the computer system is switched on and in power saving/standby mode.
Unstable picture	Remain on	Check if the specification of graphics adapter and monitor is in compliance which may be causing the input signal frequency mismatch.
Abnormal picture (Image is missing, off-center, too large or too small on the screen.)	Remain on	Using the OSD menu, adjust focus, clock, H-position and V-position with non-standard signals.  Check the display setting on your system. In case of a missing image, please select another resolution or vertical refresh rate.  Wait for a few seconds after adjusting the size of the image before changing or disconnecting the signal cable or switching off the monitor.