


10-Port 350W USB-C Charging Station - For 19" Rack or Desktop Use


Product ID

10X-CHARGING-STATION


Front View

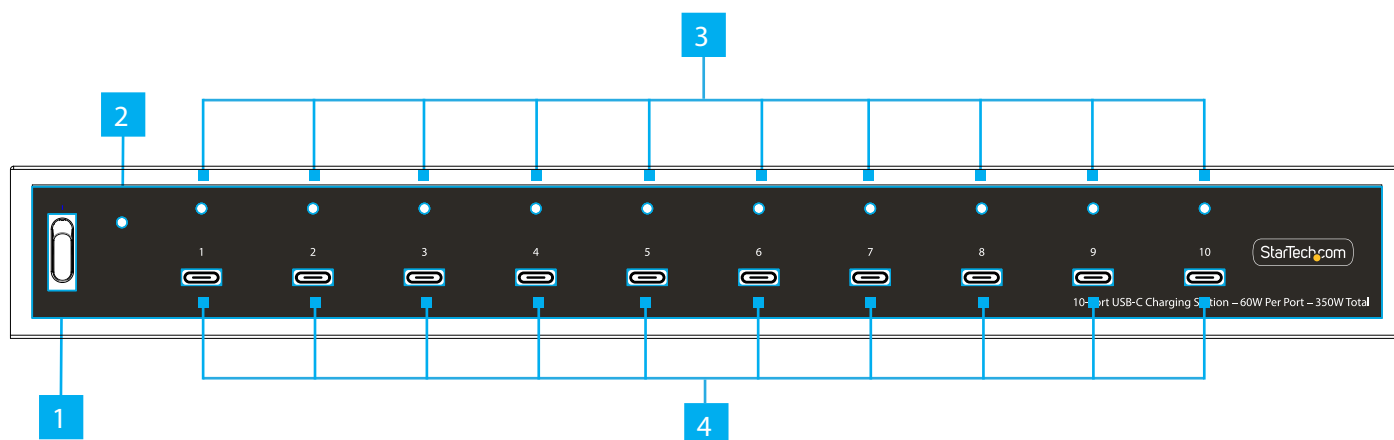

Isometric View

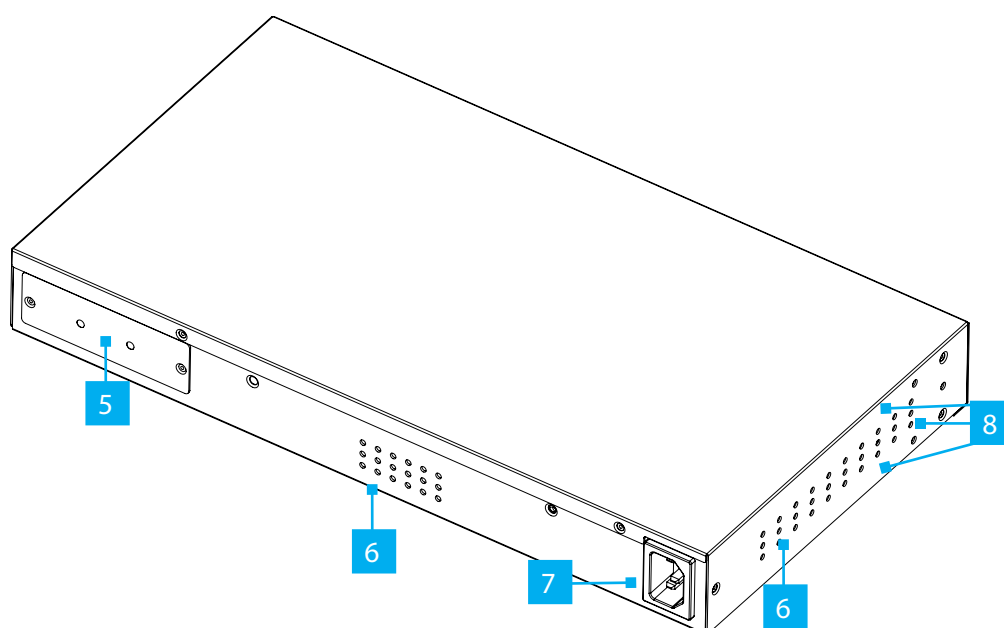


Bottom View

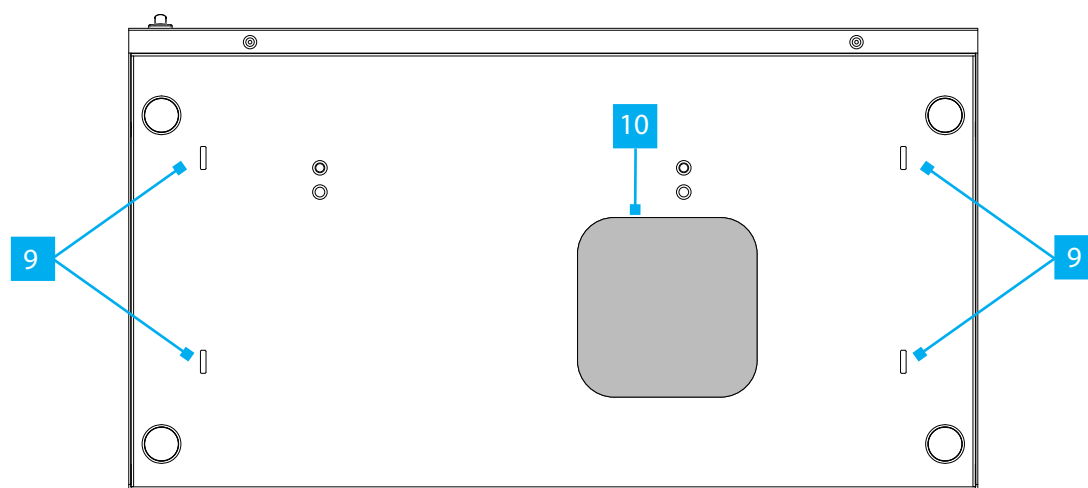

*Product may vary from image

Desk Feet

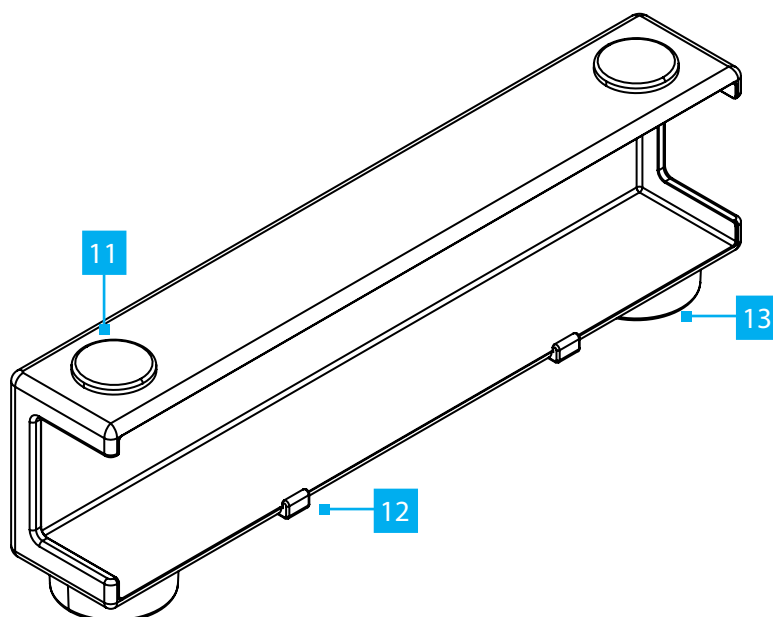

	Feature	Function
1	ON/OFF Switch	Power cycle the Charging Station ON or OFF
2	Power LED	Indicates if the Charging Station is receiving power
3	Charging Ports Status LEDs	- Display various charging status of the Connected Device(s) - LED behavior: - Blue LED - Solid: Trickle Charging - Flashing Slowly: Charging at less than 1A - Flashing Quickly: Charging at 1A or higher - Red LED - The specific USB-C port has been disabled due to Smart Power Allocation or Over Current Protection (OCP) Note: If the LED indicator remains Red following a hot plug, power cycle the Charging Station using the ON/OFF Switch Smart Power Allocation: When the total aggregate power reaches 350W, the USB-C Port(s) with the lowest current draw will be disabled to prioritize devices requiring the most power. Normal operation resumes once the aggregate power requirement drops below 290W
4	Charging USB-C Ports	- Connect USB-C devices for charging. The total allocated power budget across all ports is 350W - Supported power outputs: 5.0VDC 3.0A (15.0W Max) 9.0VDC 3.0A (27.0W Max) 12.0VDC 3.0A (36.0W Max) 15.0VDC 3.0A (45.0W Max) 20.0VDC 3.0A (60.0W Max) - PPS: 3.3-21.0VDC 3.00A (60.0W Max)
5	Service Port Cover	For StarTech.com use only
6	Ventilation Holes	Help to passively cool the internal components
7	AC Power Input	Use to provide power to the Charging Station with the included Power Cord
8	Bracket Mounting Holes	Used with the included Rack Mounting Brackets to enable rack mounting
9	Snap-On Desk Feet Retention Slots	Used to attach the included Snap-On Desk Feet
10	Fan Exhaust	- Pushes hot air out of the Charging Station Note: Ensure there's enough clearance for the hot air to be expelled and keep safe internal temperatures.

11	Stacking Pegs	(Optional) Facilitates easier stacking of multiple Charging Stations that have been fitted with the Snap-On Desk Feet Note: Prior removal of the Rubber Pads at the bottom of Snap-On Desk Feet is required for the Charging Station that goes on top.
12	Snap-On Desk Feet Mounting Clips	- Enable to attach the Snap-On Desk Feet onto the Snap-On Desk Feet Retention Slots - Remove the Snap-On Desk Feet by pulling away from the Charging Station while simultaneously Sliding Out the Snap-On Desk Feet
13	Snap-On Desk Feet Rubber Pads	Help prevent the Charging Station from sliding during operation when placed on a surface

Package Contents

- 10-Port Charger x 1 (**A**)
- 19" Rack Mounting Ears x 2 (**B**)
- M3x5mm Mounting Ear Screws x 6 (**C**)
- M5x12mm Rack Screws x 4 (**D**)
- M5 Cage Nuts x 4 (**E**)
- Plastic Snap-On Feet with Rubber Grips x 2 (**F**)
- 6ft (1.8m) Power Cord x 1 (**G**)
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit: www.StarTech.com/support

- Phillips head screwdriver with a PH1 for the M3 screws and PH2 for the M5 screws
- Cage nut tool (optional)


Warnings!

- StarTech.com Ltd. is not responsible for any property damage and/or personal injury resulting from the installation procedures outlined in this technical document.
- Read the entire Quick-Start Guide and ensure the instructions are fully understood before using this product.
- Refer to the manufacturer of the Server Rack to determine the mounting hole type and size
- If the Server Rack Mounting Posts have M5 threaded holes, the included M5x12mm Rack Screws can be installed without Cage Nuts. Use the manufacturer-recommended Screws if they differ from the ones included.
- Never operate this product if parts are missing or damaged.
- Do not touch the product under power if the product has an exposed printed circuit board or electrical wire.


Installation

Snap-on Desk Feet

1

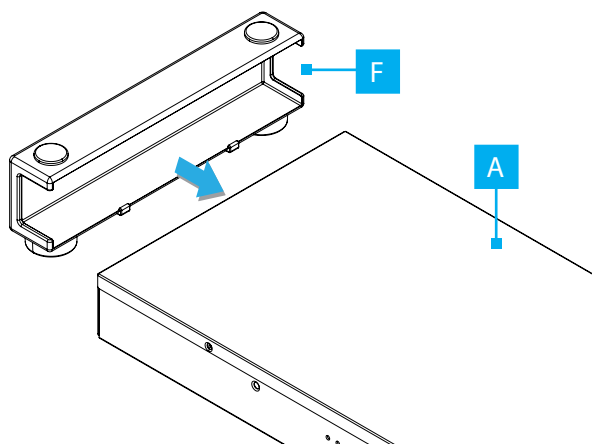


2

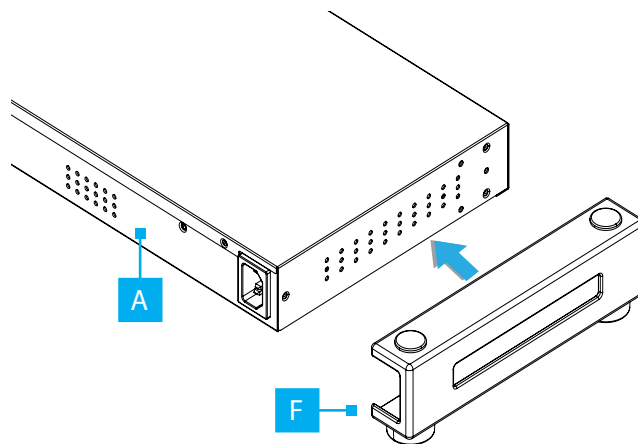


19" Rack Mounting Ears

1

2

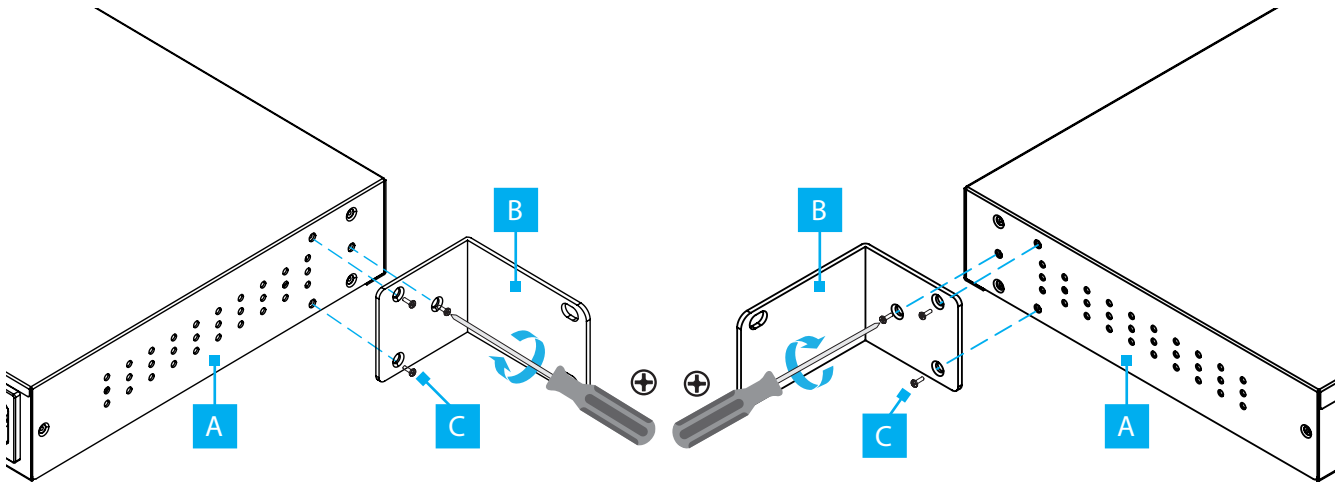


3

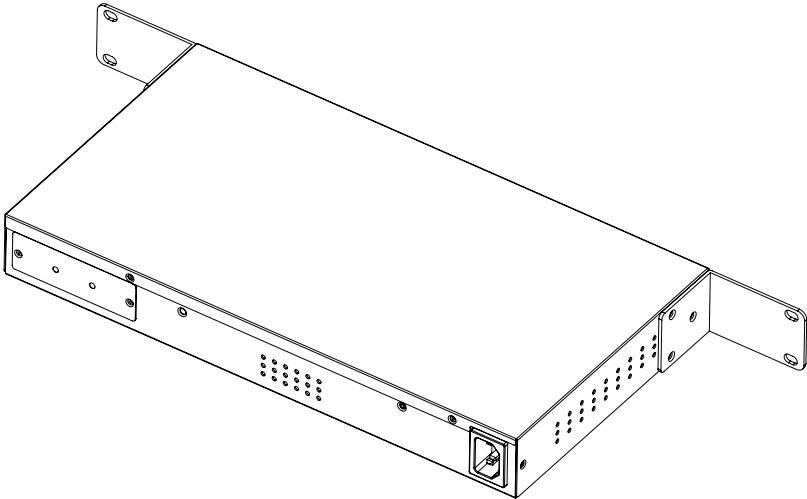


Rack Mounting

1


2

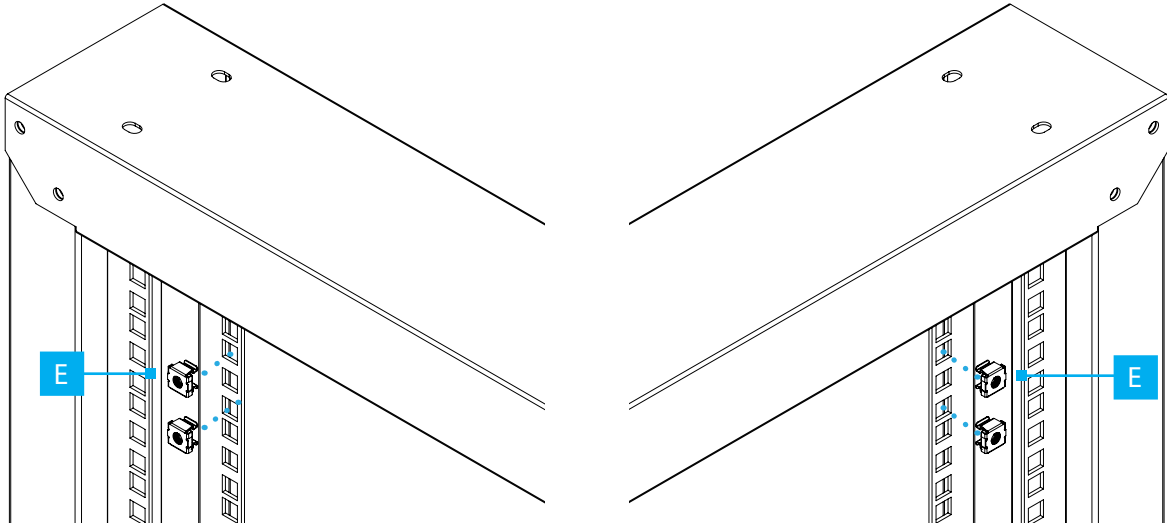


3

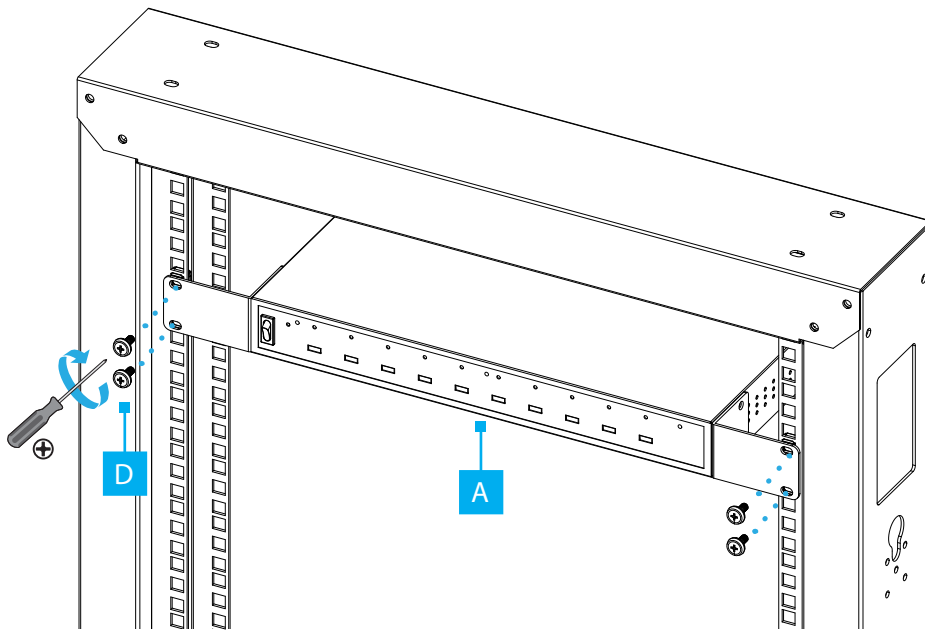

4

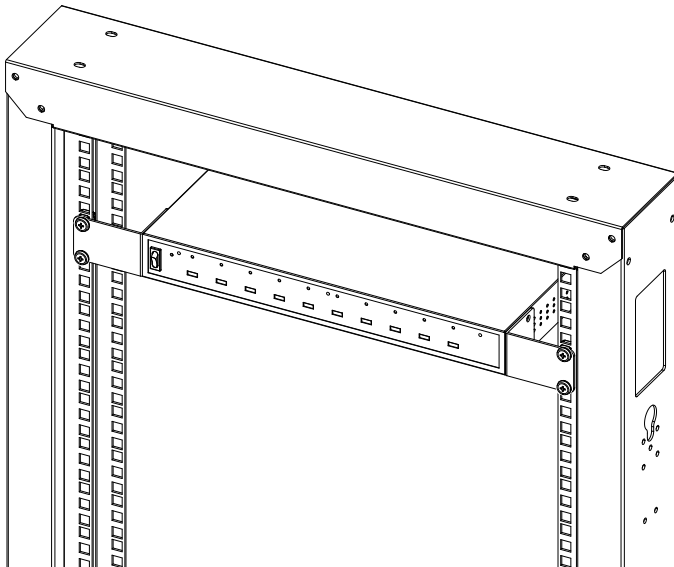

**HQ Contact:**

StarTech.com Ltd.
45 Artisans Crescent,
London, ON N5V 5E9,
Canada

US Contact:

StarTech.com USA LLP
4490 South Hamilton Rd,
Groveport, OH 43125,
United States

UK Contact:

StarTech.com Ltd.
15 Gowerton Rd,
Northampton, NN4 7BW,
United Kingdom

EU Contact:

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

JP Contact:

StarTech.com K.K.
Atelier Yours Ogawamachi 7F
1-10-2 Kanda Ogawamachi
Chiyoda-ku, Tokyo 101-0052
Japan

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp