

## QSFP-OTU4-AOC20M-AO

MSA and TAA Compliant 100GBase-AOC QSFP28 to QSFP28 OTU4 Active Optical Cable (850nm, MMF, 20m)

### Features

- Compliant to standard SFF-8636 QSFP28 active optical modules
- Compliant to 100GE/OTU4
- Automatic power down while broken cable is detected to improve eye safety
- High speed / high density: support up to 4X28 Gb/s bi-directional operation
- Low power consumption: less than 2.5W
- Reliable VCSEL and PIN photonic devices
- I2C standard management interface
- Excellent high speed signal integrity
- Commercial Temperature 0°C to +70°C
- RoHS6 Compliant



### Application

- 100GBASE Ethernet
- OTU4
- Proprietary high speed, high density data
- High performance computing, server and data storage

### Product Description

This is a MSA and TAA compliant 100GBase-AOC QSFP28 to QSFP28 OTU4 active optical cable that operates over multi-mode fiber with a maximum reach of 20.0m (65.6ft). At a wavelength of 850nm, it has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This active optical cable is TAA (Trade Agreements Act) compliant, and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's active optical cables are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



## Absolute Maximum Ratings

| Parameter                  | Symbol | Min | Typ.    | Max.    | Unit |
|----------------------------|--------|-----|---------|---------|------|
| Supply Voltage             | VCC    | 0   |         | 3.6     | V    |
| Relative Humidity          | RH     | 5   |         | 85      | %    |
| Storage Temperature        | Ts     | -40 |         | 85      | °C   |
| Operating Case Temperature | TC     | 0   | 25      | 70      | °C   |
| Data Rate per Channel      |        |     | 4*25.78 | 4*27.95 | Gb/s |

## Electrical Characteristics

| Parameter           | Symbol | Min   | Typ | Max   | Unit | Notes |
|---------------------|--------|-------|-----|-------|------|-------|
| Supply Voltage      | VCC    | 3.135 | 3.3 | 3.465 | V    |       |
| Supply Current      | Icc    |       |     | 750   | mA   |       |
| Power Dissipation   | PD     |       |     | 2500  | mW   |       |
| Clock Rate-I2C      | f      |       |     | 400   | kHz  | 1     |
| Module Turn-on time |        |       |     | 2000  | ms   | 2     |

### Notes:

1. For management interface.
2. Time from module power-on / insertion/ ResetL deassert to module full functional.

## Optical Characteristics

| Parameter                                     | Symbol  | Min | Typ     | Max     | Unit | Notes |
|---|---------|-----|---------|---------|------|-------|
| <b>Transmitter</b>                            |         |     |         |         |      |       |
| Reference Differential Input Impedance        | Zd      |     | 100     |         | Ω    | 1     |
| Optical Return Loss Tolerance                 |         |     |         | 12      | dB   |       |
| Differential Data Input Swing                 | Vin_pp  | 180 |         | 1200    | mV   |       |
| Differential Data Input Threshold             |         |     | 50      |         | mV   | 2     |
| <b>Receiver</b>                               |         |     |         |         |      |       |
| Reference Differential Input Impedance        | Zd      |     | 100     |         | Ω    | 3     |
| Differential Data Output Swing                | Vout_pp | 0   |         | 800     | mV   |       |
| Pre-emphasis Pulse Amplitude                  |         | 0   |         |         | %    | 4     |
| Percentage                                    |         | 10  |         |         | %    |       |
|   |         | 20  |         |         | %    |       |
|   |         | 40  |         |         | %    |       |
| Pre-emphasis Pulse Duration                   |         |     | 30      |         | ps   |       |
| Signal Speed                                  |         |     | 4*25.78 | 4*27.95 | Gb/s | 5     |
| Differential Data Output Swing                |         | 300 |         | 850     | mV   |       |
| Differential Data Output Swing When Squelched |         |     |         | 50      | mV   |       |
| Rise / Fall Time (20% ~80%)                   |         | 24  |         |         | ps   |       |
| Receiver Overload (Pavg)                      | POL     | 2.5 |         |         | dBm  |       |
| Damage Threshold                              | POL     | 3.4 |         |         | dBm  |       |

### Notes:

1. AC coupled inside AOC module.
2. Input swing to trigger TX-squelch.
3. AC coupled inside AOC module.
4. User selectable. Percentage is the ratio of pre-emphasis amplitude to output swing. Users could change by writing to page 3 address 237, default value is "10"
5. BER is 5.0E-5.

## Pin Descriptions


| Pin | Symbol  | Description                                      | Notes |
|-----|---------|--|-------|
| 1   | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 2   | Tx2-    | Transmitter Inverted Data Input                  |       |
| 3   | Tx2+    | Transmitter Non-Inverted Data output             |       |
| 4   | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 5   | Tx4-    | Transmitter Inverted Data Input                  |       |
| 6   | Tx4+    | Transmitter Non-Inverted Data output             |       |
| 7   | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 8   | ModSelL | Module Select                                    | 2     |
| 9   | ResetL  | Module Reset                                     | 2     |
| 10  | VccRx   | 3.3V Power Supply Receiver                       |       |
| 11  | SCL     | 2-Wire serial Interface Clock                    | 2     |
| 12  | SDA     | 2-Wire serial Interface Data                     | 2     |
| 13  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 14  | Rx3+    | Receiver Non-Inverted Data Output                |       |
| 15  | Rx3-    | Receiver Inverted Data Output                    |       |
| 16  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 17  | Rx1+    | Receiver Non-Inverted Data Output                |       |
| 18  | Rx1-    | Receiver Inverted Data Output                    |       |
| 19  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 20  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 21  | Rx2-    | Receiver Inverted Data Output                    |       |
| 22  | Rx2+    | Receiver Non-Inverted Data Output                |       |
| 23  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 24  | Rx4-    | Receiver Inverted Data Output                    | 1     |
| 25  | Rx4+    | Receiver Non-Inverted Data Output                |       |
| 26  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 27  | ModPrsl | Module Present                                   |       |
| 28  | IntL    | Interrupt  | 2     |
| 29  | VccTx   | 3.3V power supply transmitter                    |       |
| 30  | Vcc1    | 3.3V power supply                                |       |
| 31  | LPMode  | Low Power Mode                                   | 2     |
| 32  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 33  | Tx3+    | Transmitter Non-Inverted Data Input              |       |
| 34  | Tx3-    | Transmitter Inverted Data Output                 |       |

|    |      |  |   |
|----|------|--|---|
| 35 | GND  | Transmitter Ground (Common with Receiver Ground) | 1 |
| 36 | Tx1+ | Transmitter Non-Inverted Data Input              |   |
| 37 | Tx1- | Transmitter Inverted Data Output                 |   |
| 38 | GND  | Transmitter Ground (Common with Receiver Ground) | 1 |


**Note:**

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a 4.7KΩ to 10KΩ pull-up resistor to VccHost.

**Electrical Pin-Out Details**



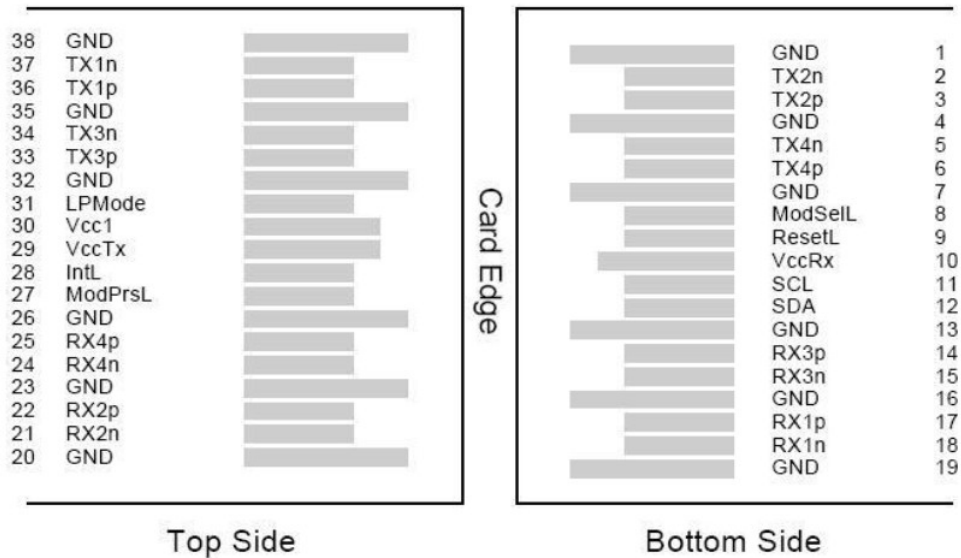


**Recommended Application Interface Circuit**

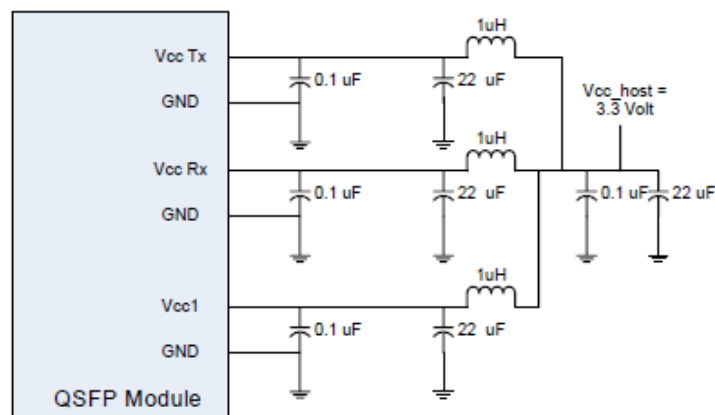

## Mechanical Specifications

| Parameter                               | Symbol | Min        | Typ | Max        | Unit   | Notes |
|---|--------|------------|-----|------------|--------|-------|
| AOC cable length (L <=5m)               | L      | L-0.06     | L   | L+0.06     | M      |       |
| AOC cable length (L > 5m)               | L      | L-(L*1.1%) | L   | L+(L*1.1%) | M      |       |
| Module Retention                        |        | 90         |     | 170        | N      |       |
| Module Insertion                        |        | 0          |     | 18         | N      |       |
| Module Extraction                       |        | 0          |     | 25         | N      |       |
| Cable Pull Strength – Apply Load at 0°  |        | 44         |     |            | N      |       |
| Cable Pull Strength – Apply Load at 90° |        | 33         |     |            | N      |       |
| Clearance Out of IO Bezel               |        | 75         |     |            | nm     |       |
| Cable Bending Radius                    |        | 3          |     |            | cm     |       |
| Insertion / Removal Cycles              |        | 50         |     |            | cycles |       |

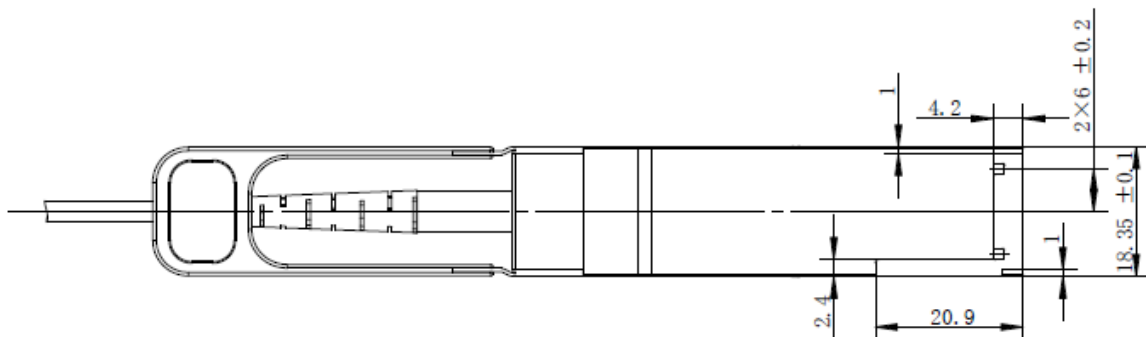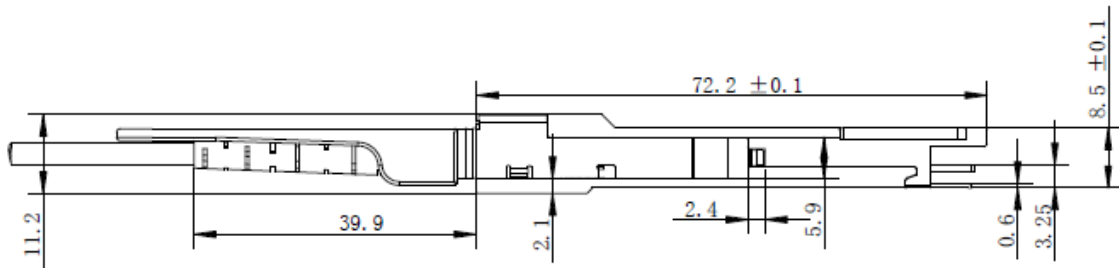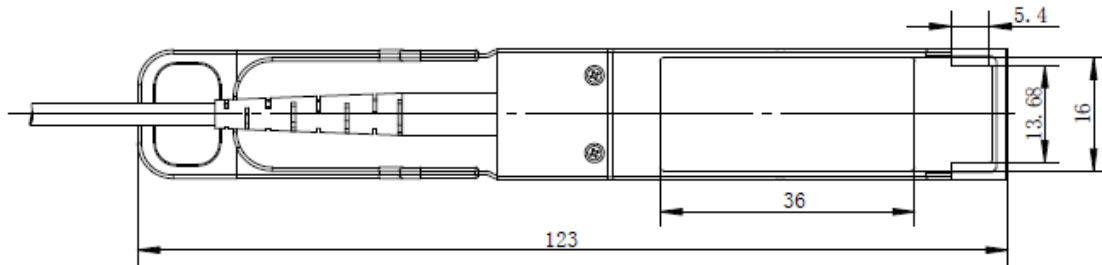

## **About AddOn Networks**

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.

## **U.S. Headquarters**

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

## **Europe Headquarters**

Email: [salesupportemea@addonnetworks.com](mailto:salesupportemea@addonnetworks.com)

Telephone: +44 1285 842070