

Phaser® 3435

Black and White Laser Printer

High end features, suitably priced for your business

Our low cost Phaser® 3435 printer offers big business features such as built-in networking, automatic two-sided printing and plenty of expansion options. It's perfect for small businesses and work teams or even as a dedicated personal printer.



Affordable, powerful business printer


- Rapid print speeds (33 ppm A4) keep pace with your growing business.
- Automatic two-sided printing makes it easy to reduce paper use.
- Never wait for pages; fast first page out in as fast as 8.5 seconds (15 seconds from sleep mode).
- Built-in networking helps you connect and print quickly.
- Heavy print volumes? An optional high-capacity print cartridge lets you print up to 10,000 pages per cartridge.

Flexible, space-saving design

- Small footprint helps save precious office space, since the Phaser 3435 takes up very little room on the desk.
- 250-sheet paper tray goes longer between refills; an optional paper tray lets you load an entire ream of paper (500 sheets) at one time.
- Ready for your network with support for Windows, Macintosh and Linux operating systems.


Engineered for quality

- 600 x 600 dpi, up to 1200 x 1200 enhanced image quality and PCL/PostScript support gives you sharp, professional-looking documents.
- Heavy duty; supports big monthly print volumes.
- Handles complex documents without delays, thanks to standard 64 MB memory (expandable to 320 MB).
- 1 year on-site warranty.

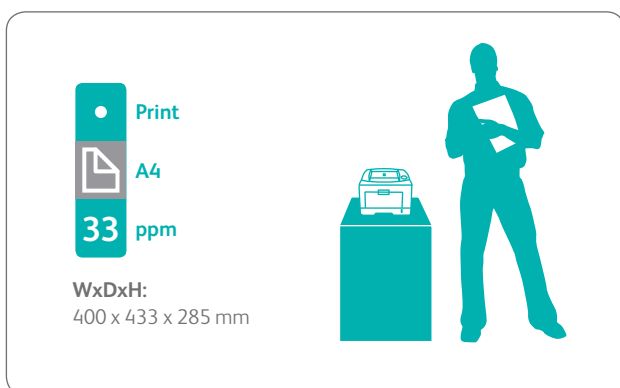

Print
A4
33 ppm

WxDxH:
400 x 433 x 285 mm



Phaser® 3435

Black and White Laser Printer



Phaser® 3435DN	
Speed	Up to 33 ppm (A4)
Duty Cycle	Up to 80,000 pages / month
Paper Handling	Multipurpose Tray: 50 sheets; Custom sizes: 76 x 127 mm to 216 x 356 mm Tray 1: 250 sheets; Sizes: A4, A5, A6 Optional Tray 2: 250 sheets; Sizes: A4, A5, A6
Paper input Standard	
Paper output	150 sheets face down, 1 sheet face up
Automatic two-sided printing	Standard
Print	
First-page-out-time	As fast as 8.5 seconds
Resolution	600 x 600 dpi, up to 1200 x 1200 enhanced image quality
Processor	400 MHz
Memory (std / max)	64 MB Flash ROM (includes 4 MB for additional fonts and macros) / 320 MB
Connectivity	Parallel, USB 2.0, 10/100Base-TX Ethernet
Page description languages	PostScript® 3™ compatibility, PCL® 6, PCL® 5e, IBM ProPrinter, Epson emulation
Print features	Watermarks, Poster printing, N-up, Fit to page, Reduce/enlarge, Overlays, Booklets, Toner saver
Warranty	One-year on-site warranty

Device Management

Phaser Installer, CentreWare® IS Embedded Web Server, CentreWare Web, Global Print Driver

Print Drivers

Windows® 2000/XP/2003 Server, Vista, Mac OS® version 8.6-9.2, 10.1-10.5, Various Linux® OS including SUSE™ 8.2-9.2, Red Hat® 8-9, Fedora™ Core 1-4, Mandrake 9.2-10.1

Security

802.1x

Font Support

1 bitmap, 45 scaleable, 136 PostScript® fonts

Media Handling

Multipurpose Tray: 60 – 163 gsm
 Media types: Plain paper, envelopes, transparencies, cardstock, postcards
 Tray 1 and Tray 2 (optional): 60 – 90 gsm
 Media types: Plain paper
 Two sided printing: 75 – 90 gsm

Operating Environment

Operating Temperature: 10° to 32° C
 Humidity: 20% to 80%
 Sound pressure levels:
 Printing: 53 dB(A)
 Standby: 25 dB(A)
 Warm-up time (from sleep mode): Less than 15 seconds

Electrical

Power: 220–240 VAC, 50/60 Hz
 Power consumption: Standby: 36 W / 34 W
 Printing: 509 W / 526 W
 Sleep: 6 W / 7 W
 Power save: 11 W
 ENERGY STAR® qualified

Dimensions (WxDxH)

401 x 434 x 312 mm
 Weight: 34.2 kg
 Package dimensions (WxDxH): 501 x 615 x 421 mm

Certifications

Listed UL 60950/CSA C22.2 No. 60950, CE Mark applicable to Directives 2006/95/EC, 2004/108/EC and 99/5/EC

What Comes in the Box

- Phaser 3435 printer
- Print cartridge (4,000 print capacity¹)
- Software and Documentation CD (with User Manual, Quick Installation Guide, Warranty Statement)
- Power cord
- USB cable



Phaser 3435 shown with optional Tray 2

Supplies

Standard-Capacity Print Cartridge¹: 106R01414
 High-Capacity Print Cartridge¹: 10,000 std. pages
 106R01415

¹ Average standard pages. Declared Yield in accordance with ISO/IEC 19752. Yield will vary based on image, area coverage and print mode.

Options

250-sheet Tray 097N01539
 32 MB Phaser Memory 097S03132
 128 MB Phaser Memory 097S03136
 256 MB Phaser Memory 097S03761



Call today. For more information visit us at www.xerox.com/office

Copyright © 2008 Xerox Corporation. All rights reserved. Contents of this publication may not be reproduced in any form without permission of Xerox Corporation. XEROX®, Phaser® and the sphere of connectivity design are trademarks of Xerox Corporation in the U.S. and/or other countries. Adobe® and PostScript® 3™ are registered trademarks or trademarks of Adobe Systems, Incorporated. PCL® is a registered trademark of Hewlett-Packard. As an ENERGY STAR® partner, Xerox Corporation has determined that this product meets the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. All other trademarks are the property of their respective manufacturers. The information in this brochure is subject to change without notice. 9/08

