

Key Features


SuperColor: Amazing Color Accuracy | 4,000 Lumen Brightness | Network Capable | Energy-efficient SuperEco




Product Description

The ViewSonic® PG705WU projector features 4,000 lumens, 1920x1200 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. Equipped with Crestron® LAN controller, this projector makes it easy for IT admin to remotely control and manage multiple projectors from their workstations. With a shorter throw ratio, 1.2x optical zoom, vertical keystone, and extensive connectivity, the PG705WU provides flexible and quick set-up. What's more, an energy-saving SuperEco® feature reduces power consumption and extends the lamp life by up to 15,000 hours. The PG705WU is the ideal projector for both high definition presentations and vibrant multimedia entertainment.



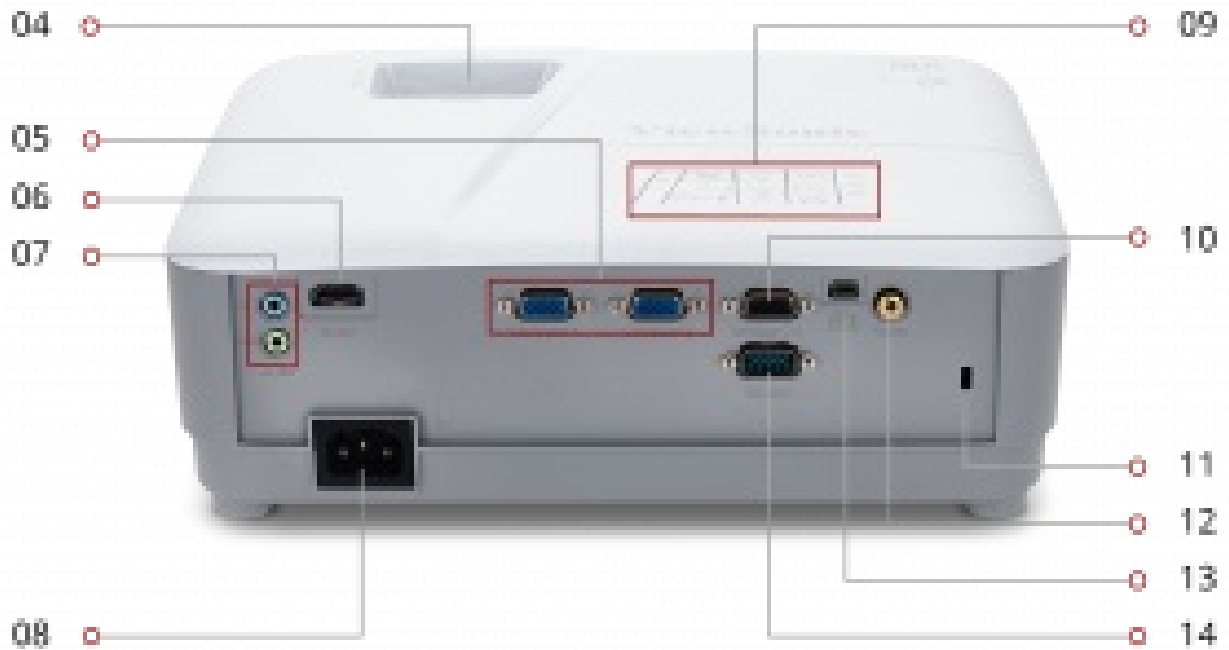


- 1. Projection lens
- 2. IR remote sensor
- 3. Elevation foot
- 4. Focus / zoom rings
- 5. VGA x2
- 6. HDMI
- 7. Audio In/Out
- 8. AC In
- 9. Control Panel
- 10. Monitor Out
- 11. Kensington® Lock Slot
- 12. Video In
- 13. USB type Mini B
- 14. RS232



1920 x 1200 RESOLUTION



4,000 LUMENS



1.49-1.76 THROW RATIO

Contact **Sales**

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP
Resolution Type:	WUXGA
Resolution:	1920 x 1200
Brightness (ANSI Lumens):	4,000
Throw Distance:	3.1 - 37.3 ft / 1 - 11.4 m
Throw Ratio:	1.49-1.76
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Keystone:	Vertical (± 40°)
Lens:	1.2x Manual optical zoom / manual optical focus

Light Source (watt):	240
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Aspect Ratio:	16:9
Video Signal:	
Frequency Horizontal:	15k~102kHz
Frequency Vertical:	23~120Hz
Compatibility:	
PC Resolution (max):	1920 x 1200
Mac® Resolution (max):	1920 x 1200
Connector:	
USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI(2), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1)	
Audio:	
Internal Speakers:	10W
Power:	
Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	350W
Stand-by:	<0.5W
Controls:	
Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
Operating Conditions:	
Temperature:	32-104° F (0-40° C)
Humidity (non-condensing):	0-90%
Additional Hardware:	
Kensington Lock Slot:	1
Weight (imperial):	
Net (lbs):	8.1
Gross (lbs):	11
Weight (metric):	
Net (kg):	3.7
Gross (kg):	5
Dimensions (imperial) (WxHxD):	
Packaging (in.):	16.4 x 13.2 x 8.2
Physical (in.):	13.1 x 10.3 x 5.3
Dimensions (metric) (WxHxD):	
Packaging (mm):	417 x 336 x 207
Physical (mm):	332 x 261 x 135
General:	
Regulations: FCC, cTUVus	
PACKAGE CONTENTS: PG705WU projector, power cable, VGA cable, remote control, Quick Start Guide	
Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**	
Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.	
UPC: 766907929713	
Accessories:	
PGD-350, PJ-SCW-1001W, PJ-WMK-006, PM-FCP, RLC-117	