

4XEM's Quad HDMI & DP 4K Universal Docking Station

4XEM Part- 4XUG69PD10



Experience stunning visuals with Quad 4K display support and connect to 4 monitors for an immersive and productive work experience. The USB Type-C Power Delivery port allows you to charge your laptop or other devices, while the USB 3.0 and 3.1 ports provide easy connection of peripherals. The Gigabit Ethernet port ensures fast internet connectivity, and the audio jack provides high-quality sound.

Our docking station features 1x USB 3.1 Type-C port, 4x DisplayPort 1.2 ports, 4x HDMI 2.0 ports, a USB Type-C 30W Charge Only Power Delivery port, 1x USB 3.1 Gen 2 Type-A port, 3x USB 3.0 Type-A ports, 1x RJ45 Gigabit port, 1x SD card reader, 1x MicroSD card reader, and 1x 4 pole audio and microphone jack.

Upgrade your workstation with the Quad HDMI & DP 4K Universal Docking Station today!

4XEM Products Are Available At Your Favorite Online Retailers

WWW.4XEM.COM

Contact Todd Schaus 4XEM sales Rep
1-866-999-4936 Ext.104 tschaus@4xem.com




Features

- Quad 4K display support: Connect to 4 monitors with the 4x DisplayPort 1.2 ports and 4x HDMI 2.0 ports, allowing you to experience stunning visuals and increased productivity.
- 100W Power Delivery: Charge your laptop or other devices with the USB Type-C port that supports 100W Power Delivery.
- Versatile connectivity: 1x USB 3.1 Type-C port, 1x USB 3.1 Gen 2 Type-A port, 3x USB 3.0 Type-A ports, 1x RJ45 Gigabit port, 1x SD card reader, 1x MicroSD card reader, and 1x 4 pole audio and microphone jack provide a wide range of options for connecting peripherals.
- Compact and portable design: Easy to take with you on the go, and compatible with most laptops and devices.
- Plug-and-play design: Easy to set up and start using right away.

Application

- Home Office
- Office
- Workstation expansion
- Versatility

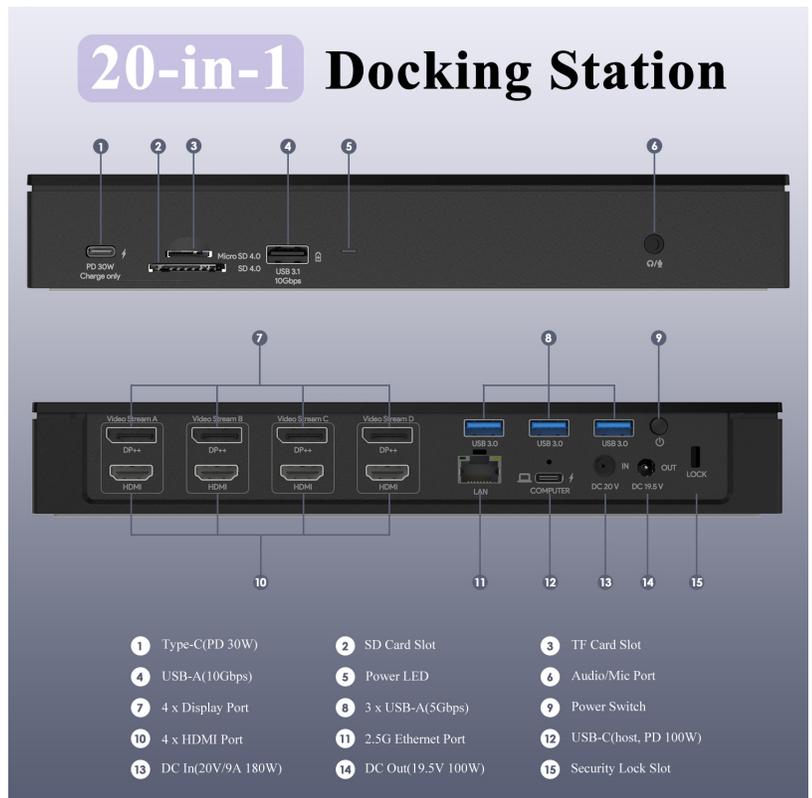

4XEM Products Are Available At Your Favorite Online Retailers



Warranty Information	Warranty	2 Years
Features/Hardware	<p>4K Support Displays Supported USB Ports Fast-Charge Port(s) Network SD Card Reader Audio Power Delivery Lock Slot Industry Standards</p> <p>Chipset ID</p>	<p>Yes 4 5 Yes Yes Yes Yes Yes Yes DisplayPort 1.2 (HBR2) HDMI 2.0 HDCP (Version depends on host GPU) Battery Charging (BC 1.2) DisplayLink - DL6910 Fresco Logic - FL7102 Genesys Logic - GL3590 Realtek - RTL8156 Genesys Logic - GL3231S Huihengtai Semiconductor (Hynetek) - HUSB338</p>
Connector(s)	<p>Host Bus Type Host Connector Host Connector Cable Connector Type(s)/Rate(s)</p>	<p>USB 3.1 Gen 2 (10Gbps) USB Type-C Detachable 4x DisplayPort 1.2 (21.6Gbps) 4x HDMI 2.0 (18.0 Gbps) 1x USB Type-C (30W PD Charging Only - No Data Connection) 1x USB 3.1 Gen 2 Type-A (10 Gbps - BC1.2: 1.5A) 3x USB 3.0 Type-A (5Gbps) 1x RJ45 (2.5 GbE) 1x SD Card Reader (SD 4.0 - UHS-II - 312MB/s) 1x MicroSD Card Reader (MicroSD 4.0 - UHS-II - 312MB/s) 1x 4-pole TRRS Phono Jack (Stereo/Mic Combo)</p>
Performance	<p>Maximum Digital Resolutions</p> <p>Maximum Analog Resolutions Audio Specification</p>	<p>Dual-Head DisplayPort: 5K (5120 x 2880 @ 60Hz) Single-Head DisplayPort: 4K UHD (3840 x 2160 @ 60Hz) HDMI: 4K UHD (3840 x 2160 @ 60Hz) N/A 2-ch Stereo (via 3.5mm Phono) Up to 5.1-ch Surround (via DP/HDMI)</p>
Software	OS Compatibility	<p>Windows 7 or later Mac OSX 10.8 or later</p>
Power	<p>Power Source Power Adapter Style Power Consumption Input Voltage Output Voltage Power Delivery</p>	<p>AC Adapter Included (100-240VAC, 50/60Hz, 3A Max , CLASS II) Brick 178W (under full load) 20V DC @ 9A 19.5V DC @ 5.1A 100W to Host 30W for Peripheral charging</p>
Physical Characteristics	<p>Color Shell Material Host Cable Length Buttons/Switches LED Indicators Power Cable Length</p> <p>Product Height Product Width Product Length Weight of Product</p>	<p>Black Aluminum and Plastic 3.12 ft [0.95 m] Power On/Off Button Power: Blue AC In: 4.59 ft [1.40 m] DC Out: 3.87 ft [1.18 m] DC (Dock to Laptop): 3.12 ft [0.95 m] 1.50 in [38.2 mm] 9.69 in [246 mm] 3.87 in [98.2 mm] 20.60 oz [584 g]</p>
Environmental	<p>Operating Temperature Storage Temperature</p>	<p>32°F to 104°F [0°C to 40°C] @ 10%-90% RH (Non-Condensing) 14°F to 158°F [-10°C to 70°C] @ 10%-90% RH (Non-Condensing)</p>
Packaging Information	<p>Package Type Package Height Package Width Package Length Shipping (Package) Weight</p>	<p>Box 5.19 in [131.8 mm] 11.10 in [282.0 mm] 4.42 in [112.2 mm] 3.97 lbs [1.80 kg]</p>
What's in the Box	Included in Package	<p>1x Quad-Display USB-C docking Station 1x USB 3.1 Gen 2 Type-C to Type-C 10 Gbps cable (with integrated Type-C screw lock and Type-C to Type-A (5 Gbps) adapter) 1x DC Power cable for laptop charging 9x Common DC Power Connector Tips 1x DC20V/9A 180W Power Adapter 1x NEMA 5-15P to IEC 320 C7 Power Cable</p>
Notes / Special Requirements	Notes	<p>"This device supports a maximum of 4 connected displays. If both ports of the same display head are occupied, DisplayPort will take precedence. 19.5V DC output can be used in lieu of, but not in conjunction with, USB-C Power Delivery if PD is unsupported by host device. DC Power Tips included for commonly used laptop models from Dell, HP, Acer, Asus, Lenovo, Compaq, Toshiba, Fujitsu, Gateway, IBM"</p>
* Product appearance and specifications are subject to change without notice.		
* Same day shipping is only available for orders shipping within the United States.		

