

# Epson PowerLite<sup>®</sup> 1925W

## MULTIMEDIA PROJECTOR

Product Name	Product Code	UPC
PowerLite 1925W	V11H314020	0 10343 87476 3
Replacement Lamp	V13H010L53	0 10343 87483 1
Replacement Air Filter	V13H134A24	0 10343 87484 8

### Specifications

**Projection System**  
Epson 3LCD, 3-chip optical engine

**Projection Method**  
Front/rear/ceiling mount

**Driving Method**  
Epson Poly-silicon TFT Active Matrix

**Pixel Number**  
1,024,000 dots (1280 x 800) x 3

**White Light Output<sup>1</sup>**  
4000 lumens (ISO 21118 Standard)

**Color Light Output<sup>1</sup>**  
4000 lumens

**Aspect Ratio**  
16:10

**Native Resolution**  
1280 x 800 (WXGA)

**Resize**  
640 x 480 (VGA), 800 x 600 (SVGA),  
1024 x 768 (XGA), 1152 x 864 (SXGA),  
1440 x 900 (WSXGA), 1680 x 1050 (WSXGA+),  
1400 x 1050 (SXGA+), 1600 x 1200 (UXGA)

**Lamp Type**  
E-TORL 230 W UHE

**Lamp Life<sup>2</sup>**  
Up to 3500 hours (ECO Mode)  
Up to 2500 hours (Normal Mode)

**Throw Ratio Range**  
1.62 – 2.61

**Size (projected distance)**  
30" – 300" 16:10 aspect (3' – 50.6')

**Keystone Correction Automatic**  
Vertical: ± 30 degrees, (± 45 manual)  
Horizontal ± 20 degrees, (± 30 manual)

**USB Plug 'n Play**  
Mac compatible via DVI to VGA adapter (not included)  
USB Plug 'n Play for Windows<sup>®</sup> 2000 or later

**Contrast Ratio**  
Up to 2000:1

**Color Reproduction**  
16.77 million colors

### Projection Lens

**Type**  
Powered focus  
Manual (optical) zoom

**F-number Focal Length**  
1.75 – 2.42 24 mm – 38.2 mm

**Zoom Ratio**  
Optical zoom 1.0 – 1.6

<sup>1</sup>Light output varies depending on modes (color and white light output). White light output measured using ISO 21118 standard.  
<sup>2</sup>Data source: ProjectorCentral.com, Jan. 2009. Average of 796 shipping models, for which manufacturers provided lumens and total power data, all resolutions and brightness levels.  
<sup>3</sup>Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.  
<sup>4</sup>See our website for convenient and reasonable recycling options at [www.epson.com/recycle](http://www.epson.com/recycle)  
<sup>5</sup>Recommendation based on normal room conditions. Cleaning requirements may vary depending on use, environment and other conditions. Cleaning intervals may be adjusted to accommodate the environment in which the projector is used.

**Epson America, Inc.**  
3840 Kilroy Airport Way, Long Beach, CA 90806

**Epson Canada, Ltd.**  
3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

**www.epson.com**  
**www.epson.ca**

Specifications and terms are subject to change without notice. Epson, Easy Management, EasyMP, E-TORL and Instant Off are registered trademarks, Epson Exceed Your Vision is a registered logo-mark and Better Products for a Better Future is a trademark of Seiko Epson Corporation. PowerLite and PrivateLine are registered trademarks, Duet is a trademark and Epson Connection is a service mark of Epson America, Inc. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. Copyright 2009 Epson America, Inc. CPD-30493 10/09

### Other

**Display Performance**  
NTSC: 480 lines  
PAL: 560 lines  
(Depends on observation of the multi-burst pattern)

**Input Signal**  
NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/SECAM

**Interfaces**  
Computer/component video: D-sub 15 pin x 2  
S-video: Mini DIN x 1  
Composite video: RCA x 1  
Audio in x 3 (RCA (L&R) x 1, mini stereo x 2)  
Variable audio out: mini stereo x 1  
USB connector: Type-B x 1 (USB display and mouse/keyboard control), Type A x 2 (for USB memory device/Epson doc camera)  
Serial: RS-232c x 1  
LAN networking: RJ-45 x 1  
Monitor out: Mini D-sub 15 pin x 1  
Wireless LAN port: 802.11 a/b/g

**Speaker**  
10 W (mono)

**Operating Temperature**  
41 ° to 95 °F (5 ° to 35 °C)

**Power Supply Voltage**  
100 – 240 V ±10%, 50/60 Hz

**Power Consumption**  
341 W  
Communication on: 5.5 W standby  
Communication off: 0.2 W standby

**Fan Noise**  
29 dB (ECO Mode)  
37 dB (Normal Mode)

**Security**  
Kensington<sup>®</sup>- style lock provision, security anchor bar

### Dimension (W x D x H)

Including feet: 14.1" x 10.12" x 3.74"  
Excluding feet: 14.1" x 10.12" x 3.4"  
Weight: 7.82 lb

### Remote Control

**Features**  
Search, comp, video, USB, LAN, power, aspect, color mode, volume, e-zoom, A/V mute, freeze, menu, page up and down, help, auto, mouse functions, user, ID num, pointer, esc, enter

**Operating Angle Operating Distance**  
Right/left: ± 30 degrees 26' (8 m)  
Upper/lower: ± 30 degrees

### Support — The Epson Connection<sup>SM</sup>

Pre-sales support  
U.S. and Canada 800-463-7766  
Internet website [www.epson.com](http://www.epson.com)

**Service Programs**  
Two-year projector limited warranty, Epson Road Service program, Epson PrivateLine<sup>®</sup> dedicated toll-free support and 90-day lamp limited warranty

**What's In The Box**  
Power cord, computer cable (VGA), USB cable, wireless LAN unit, soft carrying case, projector remote control, batteries, user manual CD, projector software CD, Quick Setup Sheet, PrivateLine support card, and password protection sticker

### Accessory Part Numbers

Replacement wireless LAN module	V12H306P11
Quick Wireless Connection USB key	V12H005M06
Universal projector ceiling mount	ELPMBPJF
Advanced projector ceiling mount	ELPMBPRG
High-security projector ceiling mount	ELPMBATA
Adjustable suspended ceiling channel kit	ELPMBP01
False ceiling plate kit	ELPMBP02
Structural round ceiling plate	ELPMBP03
Adjustable extension column (pipe) 8" – 11"	ELPMBBC01
Component to VGA video cable	ELPKC19
S-video cable	ELPSV01
SwissGear <sup>®</sup> backpack	ELPKS63
50" portable screen	ELPSC06
60" portable pop-up screen	ELPSC07
80" portable pop-up screen	ELPSC08
Duet <sup>™</sup> screen	ELPSC80
Epson DC-06 document camera	V12H321001
Kensington security lock	ELPSL01
Distribution amplifier	ELPDA01
Replacement lamp	V13H010L53
Replacement air filter	V13H134A24

**EPSON**<sup>®</sup>  
EXCEED YOUR VISION



## Epson PowerLite<sup>®</sup> 1925W

MULTIMEDIA PROJECTOR



### Wireless, widescreen performance.

Get brilliant widescreen presentations that will wow any audience — it's easy with the ultra bright, network-ready Epson PowerLite 1925W. This powerful projector yields vivid, high quality images, yet still includes a host of user-friendly features, such as a wireless module for easy wireless setup. With Epson 3LCD technology and 4000 lumens of color/white light output<sup>1</sup>, your presentations will pop in any setting. With HDMI digital connectivity, and WXGA resolution, you can project HD movies and more.

**Larger-than-life images** — native WXGA resolution (16:10); ideal for widescreen computers  
**Incredible image quality, anytime, day or night** — 4000 lumens color light output, 4000 lumens white light output<sup>1</sup>



# Epson PowerLite® 1925W MULTIMEDIA PROJECTOR

## The best-selling projectors in the world.


Epson offers a wide range of high-quality projectors to meet almost any need. Built with image quality and reliability in mind, Epson projectors enhance communication and inspire collaboration, while offering a low total cost of ownership. From ultraportable projectors designed for educational settings to boardroom-ready business projectors, Epson has the model made for you.



### 3LCD technology — for quality and color that's beyond amazing

#### Innovative technology with proven reliability

- 3 chips for full-time, vibrant color
- 25% less electricity required per lumen of brightness when compared to 1-chip DLP projectors<sup>2</sup>
- Road-tested reliability from a company with over 20 years of experience

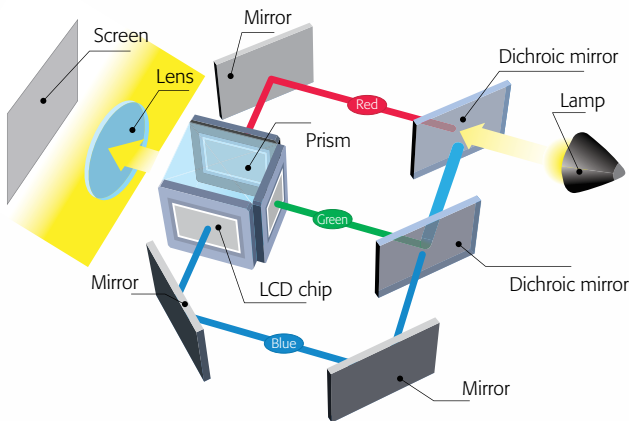

▲ 3LCD, 3-chip technology

### Amazing light output

- 4000 lumens color light output and 4000 lumens white light output<sup>1</sup>
- High color light output for bright, balanced, colorful images
- White light output that's measured using ISO 21118 (a more rigid standard than the outdated ANSI lumens rating used by competitive products)




High color light output

Low color light output

Actual photographs of images taken from two competing projectors run in default mode. Price, resolution and brightness (white light output) are the same for both projectors.

### Energy-efficient E-TORL® lamp, exclusively from Epson

- Delivers more lumens per watt and lasts up to 3500 hours<sup>3</sup>
- Minimizes both light diffraction and light leakage
- E-TORL lamps maximize your presentation time, while minimizing your costs

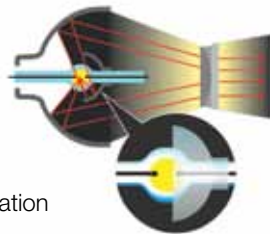

▲ E-TORL lamp



▲ Compact and portable design



#### Eco features

- Energy-efficient 3LCD light engine
- Energy-efficient E-TORL lamp
- Designed to be recycled<sup>4</sup>
- RoHS compliant

#### Better Products for a Better Future™

For more information on Epson's environmental programs, go to [eco.epson.com](http://eco.epson.com)

# Precision control

## USB Plug 'n Play instant setup

- No more pressing computer function keys or carrying bulky VGA cables
- Just plug in a standard USB cable and instantly project video with audio from your PC!
- This USB connection also enables you to maintain control over your presentation with the page up/page down function on the remote control



## Fast, easy setup and control

- **Instant Off®** — no cool-down time required, so it's ready to shut down when you are
- **A/V Mute Slide** — control your presentation; it's right at your fingertips
- **Sleep Mode** — set from 1 to 30 minutes to save energy when the A/V Mute Slide is closed or no signal is detected
- **1.6x optical zoom** — offers great positioning flexibility
- **Direct Power On/Off** — power the projector on and off with the flip of a wall switch

## Epson's leading-edge EasyMP® network technology

### Built-in wireless features

- Present wirelessly using the 802.11 a/b/g module via a PC or Mac®; transmit audio as well
- With the broadest security protection, the PowerLite 1925W is ideal for corporate applications; compatible with LEAP, PEAP, WPA2 and more
- Use the optional Wi-Fi® Quick Connect key for faster wireless setup (PC only)

### PC-free presentations

- Connect a memory device and start your presentation — all without a PC
- Display MPEG2 and MPEG4 videos as well as photos
- Compatible with a whole host of file formats (JPEG, GIF, BMP, PNG)

### Easy Management®

- Remotely access, monitor and control projectors over the network; centralized control
- Enjoy easy management and maintenance via Simple Network Management Protocol (SNMP)
- Send e-mail notifications to alert network administrators when there are issues related to the temperature, fan and lamp status



## PowerLite 1925W Features

- **Brilliant detail** — 720p resolution and up to 2000:1 contrast ratio
- **Convenient network accessibility** — display images over the IP network from any networked location
- **Powerful sound and communication features, no added cost** — built-in 10 W speaker, built-in closed captioning decoder
- **Cutting-edge connectivity** — RJ-45 LAN connection, HDMI port with HDCP for digital connectivity
- **Easy picture adjustments and greater positioning flexibility** — 1.6x manual zoom with powered focus, controllable via the remote or RS-232
- **Message broadcasting** — broadcasts customized images/alerts over the network for announcements or instructions
- **Added security in any environment** — convenient metal anchor bar, control panel lockout
- **Easy maintenance** — easy, side-loading lamp and one-touch filter replacement
- **Protect your investment** — recommended 2500-hour filter cleaning cycle<sup>5</sup>
- **Outstanding support** — two-year limited warranty
- **Carrying case included** — for easy portability and protection when stored

## Screen Fit

A Quick Setup function with an auto-sensing feature that intuitively sets up the appropriate screen size, keystone and focus — all at the touch of a button.



## Brilliant image quality and detail

Resolution defines the level of detail and depth you'll see in a projected image. It's measured as the number of pixels high by the number of pixels wide. The more pixels, the better the image quality.



**800 x 600**  
Meets basic projection needs



**1024 x 768**  
Ensures sharper detail



**1280 x 800**  
Offers the highest quality and is ideal for widescreen (16:10) display