

# ViewSonic® VP201s/VP201b LCD Display

## 20.1" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY



VP201b shown.  
Also available in silver (VP201s)

Immerse yourself in the panorama of this big-picture LCD.

Turn your ideas into breathtaking reality with the 20" VP201s and VP201b **LARGE-SCREEN THINEDGE ULTRA-SLIM BEZEL LCD** displays. With astounding 176° ultra-wide viewing angles, UXGA 1.92 megapixel resolution, ClearMotiv™ broadcast-quality video technology and native HDTV high-scan 720p compatibility, these displays boost professional productivity and heighten user enjoyment for video editors, financial traders, CAD/CAM engineers and power gamers. Ideal for multiple-panel configurations with height/pivot adjustments, digital/analog inputs and USB 2.0 high-speed connectivity, the VP201s and VP201b are the infinitely versatile professional desktop displays of choice.



ThinEdge design is ideal for multi-panel setups. Four unit panel-module-only (without base) multi-packs available.

Uncompromised features and versatility to have you seeing 20/20.

### ••• ThinEdge maximizes your productivity

The ultra-slim 0.67" bezel design enhances your visual experience with clean, minimalist borders around the active image area. Suitable for tiling and stacking.

### ••• Ideal for multiple-monitor setups

ThinEdge minimizes bezel gaps between panels for a virtually continuous viewing area in multiple-panel setups.

### ••• Pivot, height and wall-mount versatility

VESA® wall-mount interface and detachable base for ergonomic flexibility with pivot, height, tilt and swivel adjustments.

### ••• **OPTISYNC** analog/digital inputs and integrated USB hub expand your connectivity

Includes one DVI-I (analog or digital capable) and one analog input. Integrated USB 2.0 high-speed hub enables unlimited connectivity options.

### ••• ClearMotiv™ technology

Ultra-fast 16ms video response enables digital HD broadcast-quality full-motion video at 62.5 fps.\*

### ••• Full 20.1" viewable screen

### ••• 1600x1200 native resolution

### ••• High brightness and contrast

250-nit brightness (typ) and 350:1 contrast ratio (typ) for rich images.

### ••• HDTV-720p ready

### ••• Image clarity from all directions

XtremeView® performance features ultra-wide 176° viewing angles horizontally and vertically.

### ••• Integrated power supply with hard power switch

### ••• TCO'03 and ENERGY STAR®

TCO'03 for silver and TCO'99 for black models.



\*VP201s only. VP201b has 25ms video response for video at 40 fps.



**ViewSonic®**  
See the difference.®

# ThinEdge

# ViewSonic® VP201s/VP201b LCD Display


## 20.1" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY



**Pivot feature saves time**  
Spend less time scrolling long documents. Simply rotate your screen from landscape to portrait.



**Wide-travel height adjustment**  
With over 4 1/4 inches of travel, this LCD fits just right.

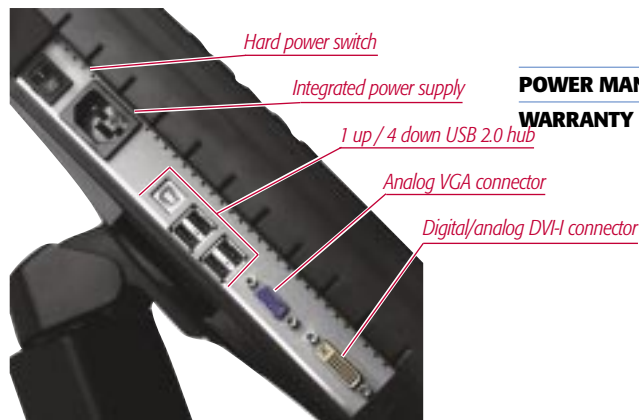

<b>LCD PANEL</b>	<b>Type</b>	20.1" color TFT active matrix UXGA LCD
	<b>Display Area</b>	16.1" (horizontal) x 12.1" (vertical); 20.1" diagonal
	<b>Optimum Resolution</b>	1600x1200
	<b>Contrast Ratio</b>	350:1 (typ)
	<b>Viewing Angles</b>	176° horizontal, 176° vertical
	<b>Response Time</b>	16ms (typ) – VP201s/25ms (typ) – VP201b
<b>VIDEO INPUT</b>	<b>Brightness</b>	250 cd/m2 (typ)
	<b>Glass Surface</b>	Anti-glare
	<b>Analog</b>	RGB Analog (75 ohms, 0.7/1.0 Vp-p)
	<b>Digital</b>	DVI-D (TMDS, 100 ohms, or analog capable)
<b>COMPATIBILITY</b>	<b>Frequency</b>	Fh: 30~92kHz, Fv: 50~85Hz
	<b>Sync</b>	H/V separated, composite, sync-on-green (TTL)
	<b>PC</b>	VGA up to 1600x1200 non-interlaced
<b>CONNECTOR</b>	<b>Mac**</b>	Power Mac™ G3/G4 up to 1600x1200
	<b>HDTV</b>	480p, 720p
	<b>Analog</b>	15-pin mini D-sub
<b>POWER</b>	<b>Digital</b>	Digital DVI-I
	<b>USB</b>	V 2.0 Up stream (B type) x1; Down stream (A type) x4
	<b>Power</b>	3-pin plug (CEE22)
<b>OPERATING CONDITION</b>	<b>Voltage</b>	AC 100–240V (universal), 50–60Hz
	<b>Consumption</b>	70W (typ)
<b>CONTROLS</b>	<b>Basic</b>	Power, 1, down, up, 2
	<b>OnView®</b>	Auto image adjust, contrast, brightness, input select (D-sub, DVI-A, DVI-D), color adjust (9300K, 6500K, 5400K, 5000K, user color), information (H/V frequency, resolution, model number, serial number, web site), manual image adjust (H. size, H/V position, fine tune, sharpness, scaling), setup menu (language, resolution notice, input priority, OSD position, OSD time-out, OSD background, OSD pivot), memory recall
<b>OPERATING CONDITION</b>	<b>Temperature</b>	32–104° F (0–40° C)
	<b>Humidity</b>	10–90% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	<b>Physical:</b>	448mm x 480mm x 267mm (w/ stand)
		17.6" x 18.9" x 10.5" (w/ stand)
		448mm x 346mm x 71mm (w/out stand)
		17.6" x 13.6" x 2.8" (w/out stand)
<b>WEIGHT</b>	<b>Net</b>	18.7 lbs. (8.5 kgs) w/ stand; 11.5 lbs. (5.2 kgs) w/out stand
	<b>Gross</b>	24.7 lbs. (11.2 kgs) w/ stand; 15.9 lbs. (7.2 kgs) w/out stand
<b>REGULATIONS</b>	UL, cUL, FCC-B, CB, CE, ENERGY STAR®, NOM, TUV/GS, TUV Ergo, (covers ISO13406-2 and MPR II) TCO'03 (VP201s), TCO'99 (VP201b), NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, hygienic, SASO, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, TUV-S	
<b>POWER MANAGEMENT</b>	Meets TCO and ENERGY STAR standards	
<b>WARRANTY</b>	Three-year limited warranty on parts, labor and backlight.	



**ViewSonic®**  
See the difference.®

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789  
Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

\*Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2003 ViewSonic Corporation. All rights reserved. [11116-02B-10/03] VP201s-1/VP201b-1

For more product information, visit us on the web at [ViewSonic.com](http://ViewSonic.com)

specifications