


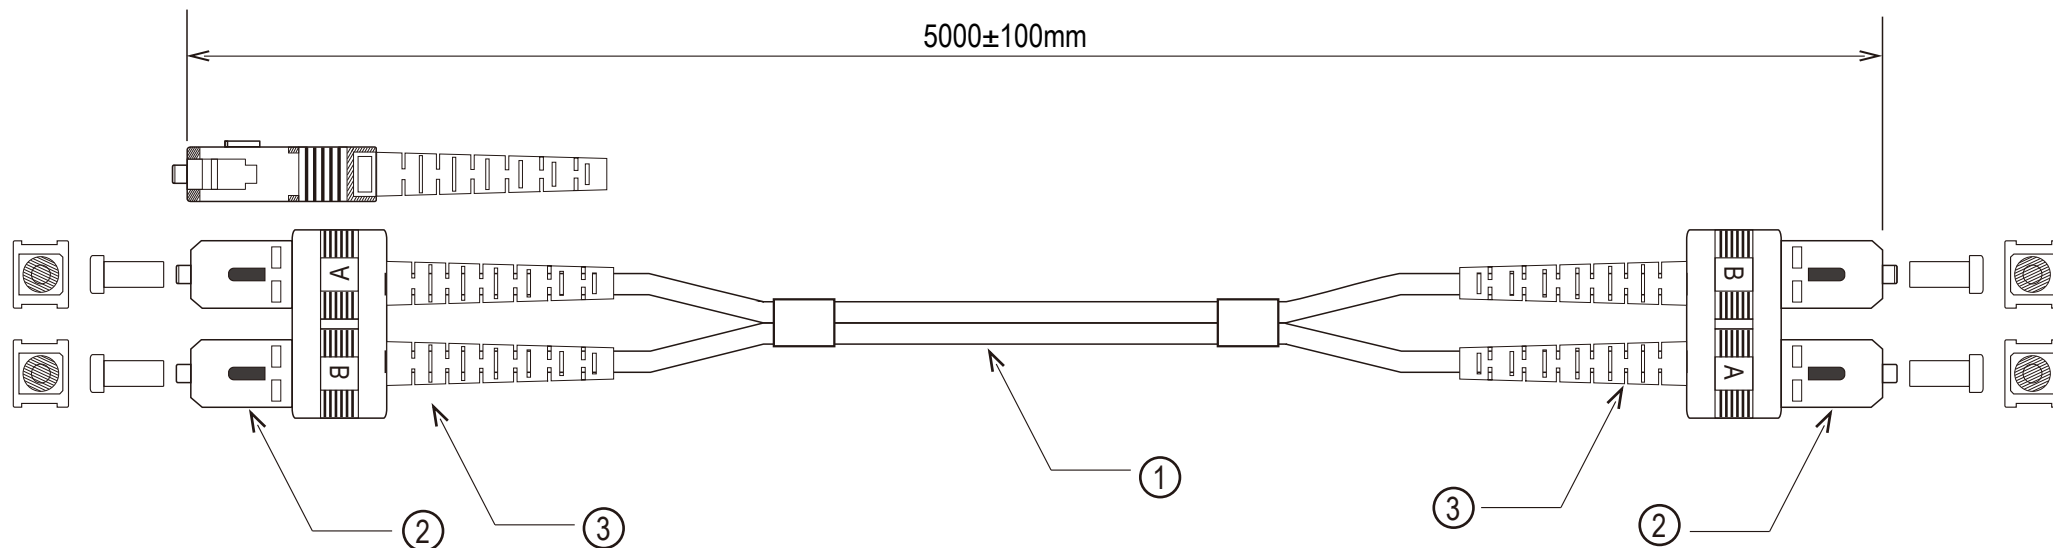

NOTE:

ALL FIBER CABLE ARE TESTED BY INSERTION LOSS/RETURN LOSS TEST STATION AND INTEGRATED OPTICAL FIBER END FACE INSPECTION EXPERTS

Specifications

Insertion Loss(dB)	≤ 0.3
Return Loss(dB)	≥ 35
Plug Housing Color	Beige
Boot Color	Beige
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	-30~+85
Operating Wavelength(mm)	850

③	BOOT	2PCS	Beige
②	PLUG	2PCS	SC/UPC-SC/UPC,Beige
①	CABLE	1PCS	Φ2.0mm 6 2.5/125 OM1 LSZH (orange)
NO.	PARTS NAME	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	FB-55
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

PATCHCORD, SC/UPC-SC/UPC
DX, 62.5/125 OM1, LSZH

