

SHARP®

A Series Professional Advanced LCD Laser Installation Projectors XP-A155U/XP-A175U



4K UHD
READY

laser
light source

Professional Installation Projectors ideal for corporate,
higher education and museum applications

LCD laser installation projectors deliver extreme brightness, ensuring vivid, lifelike visuals that keep audiences engaged in conference rooms, auditoriums, and sanctuaries.

Why It Works for You

- Multi-screen wow factor - Seamlessly support Picture-by-Picture or Picture-in-Picture, and use TileMatrix to power 4Kx2K resolution across four projectors - no extra hardware needed.
- Effortless scalability - Built-in daisy chain and edge-blending let you expand visuals and merge multiple images into one seamless experience.

4K UHD
READY

Next-level Integration


- 4K clarity that stands out - Sharp's proprietary video processing chip ensures stunning 4K 60P content with no detail lost.
- Total control, zero hassle - Preloaded with AMX Beacon, Crestron RoomView, Extron XTP, and PJ Link for smooth system integration. Plus, native support for competitor control codes reduces reprogramming costs.

Flexible Installations

- Fits any space - Motorized bayonet lenses make swaps fast, with throw distances from 4.25 to 141 ft.
- Install it your way - Roll Free and portrait-capable design adapts to almost any environment.

Laser Power


- Instant on - No wait time, images appear immediately after startup.
- Best-in-class balance - Dual blue lasers deliver consistent colour and white balance throughout the projector's life.
- Built to last - Inorganic optical components extend reliability and peace of mind.

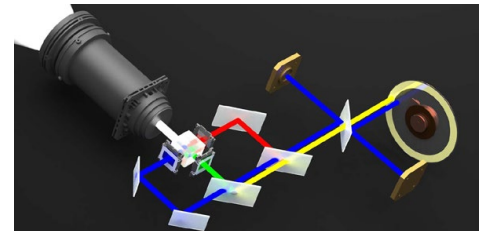

Virtually Maintenance-Free

- Filter free design.
- IP5X certified Sealed LCD cooling system prevents dust from reaching the optics and eliminates the need for a filter.
- Peace of mind - No dust artifacts, no image degradation, just long-lasting performance.

Sealed LCD
Cooling System




**IP5X
RATED**
OPTICAL BLOCK

Brighter, Safer Visuals

Boost brightness up to 68,000 lumens with built-in stacking correction (up to four projectors) - perfect for massive screens and high ambient light environments.

Never lose the picture - if one projector goes down, your content stays visible.

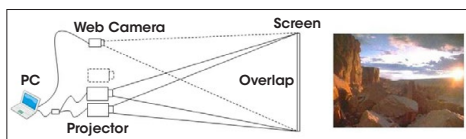

Seamless Big-Screen Impact

Edge blending merges multiple projections into one flawless, high-resolution image - no seams, just a smooth, cinematic display.



ProAssist™ Total Control, Simplified

Manage multiple projectors with ease using ProAssist™ software.

Fine-tune every detail - from input switching and lens adjustments to edge blending, uniformity, and gamma - all from a simple, intuitive interface.


ProAssist™



Built-In HDBaseT: One Cable, Total Simplicity

Streamline installs with a single cable (up to 100m) carrying uncompressed Full HD video, audio, Ethernet, and control signals.

Cut costs, reduce clutter, and enjoy stunning visuals without extra hardware or complex wiring.

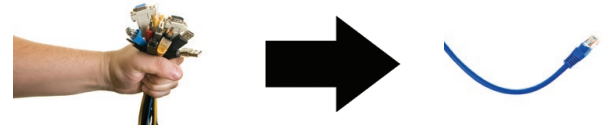

Stay Connected, Stay Flexible

Multiple digital inputs for fast, seamless switching between presentations.

Three audio inputs (HDMI1, HDMI2, and HDBaseT) let you easily add sound for a more engaging experience.

Remote control

Wired and wireless backlit remote allows you to adjust for complete control of the projector's menu structure in a well lit or dark environment. Direct controls such as lamp mode, aspect ratio, volume and input selection eliminates multiple button pushes.



Digital Inputs

Among the A Series' wide selection of inputs are dual HDMI w/HDCP and HDBaseT w/HDCP for connecting to high-definition sources such as Blu-ray players, cable boxes, satellite receivers and personal computers.



HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

Cable Cover

This optional accessory creates a clean look for your installation, while hiding signal cables and the power cord.



Advanced Software Features

Geometric Correction

Projecting an image isn't confined to a standard flat screen or wall with the A Series. Geometric correction allows these models to project an image on spheres, cylinders, corner angles and many more non-standard surfaces.

Vertical cylindrical convex screen



Horizontal cylindrical concave screen



Vertical cylindrical concave screen




Corner



Screen Splitter


Sharp is committed to bringing the latest and greatest innovation to projectors. Multi-display capabilities and TileMatrix technologies are integrated into the new A Series projectors. This processing is all done internally and therefore eliminates the additional hardware typically required to produce a beautiful 4K resolution image.

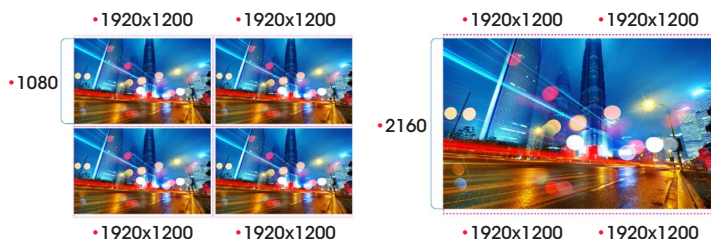

Screen Splitter (Multi-Display) by Daisy Chain

Roll Free

When installation requirements dictate the projector needs to be placed at different angles the A Series with Roll Free capabilities assures it is the correct projector of choice.

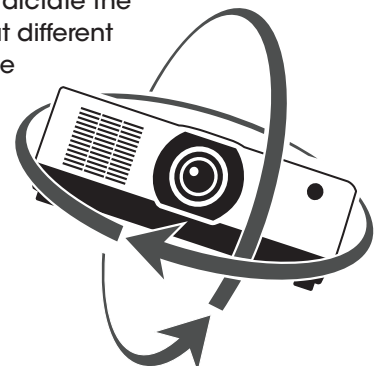

Unique Features That Save You Time & Money

Filter-free peace of mind – IP5x sealed LCD cooling system eliminates filters, cutting maintenance and lowering total cost of ownership.

Simplified connectivity – HDBaseT in/out lets you pass video, audio, and control between projectors with ease.

Seamless integration – Built-in competitor command support reduces reprogramming needs and speeds up installation.

Warranty

Registered owners receive a five (5) year or 20,000 hours (whichever comes first) parts and labour warranty.

In the Box


Remote control, batteries, power cord, quick start guide, product registration card.

Accessories*

RMT-PJ40	Replacement Remote Control
Optional Lenses	XP-51ZL, XP-52ZL, XP-53ZL, XP-54ZL, XP-55ZL, XP-56ZL
Optional Terminal Cover	XP-13CV-B, XP-13CV-W
IPJ2000CM	Ceiling Mount
AEC006009	Adjustable Extension Column, 6" - 9"
AEC012018	Adjustable Extension Column, 12" - 18"
AEC0203	Extension Column, 2' - 3'
AEC0305	Adjustable Extension Column, 3' - 5'
XP-02LK	Mounting Bracket for XP-44ML

Ordering Model Numbers

XP-A155U-B	XP-A175U-B
XP-A155U-W	XP-A175U-W

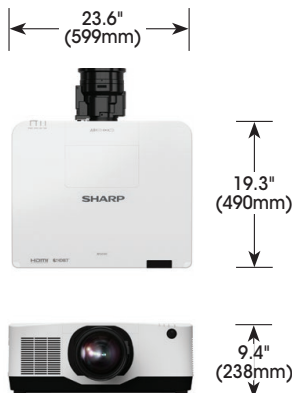

Model		XP-A155U	XP-A175U
Display Technology		1.0" LCD	
Brightness (typical)		14,000 Lumens	16,000 Lumens
Brightness (maximum)		15,000 Centre Lumens	17,000 Centre Lumens
Resolution	Screen Maximum	WUXGA 1920x1200 4K 4096 x 2160	
Aspect Ratio		16:10 (Supports 4:3, 16:9, 21:9)	
Contrast Ratio (up to)		3,000,000:1 (with Dynamic Contrast)	
Laser Life (up to)		20,000 hours	
Screen Size (diagonal)		60 to 500 in. / 1.5 to 12.7m	
Projection Distance		2.17 to 261.9 ft. / 0.67 to 79.8m	
Projection Angle		3.1 to 28.2° tele / 5.7 to 31.5° wide	
Throw Ratio	XP-51ZL	0.53 - 0.65:1	
	XP-52ZL	0.65 - 0.87:1	
	XP-53ZL	0.86 - 1.25:1	
	XP-54ZL	1.24 - 2.01:1	
	XP-55ZL	1.98 - 3.95:1	
	XP-56ZL	3.95 - 7.51:1	
Lens*	Throw Ratio	XP-51ZL	0.53 - 0.65:1
		XP-52ZL	0.65 - 0.87:1
		XP-53ZL	0.86 - 1.25:1
		XP-54ZL	1.24 - 2.01:1
		XP-55ZL	1.98 - 3.95:1
		XP-56ZL	3.95 - 7.51:1
	Zoom	Motorized	
	Zoom Ratio	XP-51ZL	1.23x
		XP-52ZL	1.34x
		XP-53ZL	1.45x
		XP-54ZL	1.62x
	Focus	XP-55ZL	1.99x
		XP-56ZL	1.91x
		Motorized	
		XP-51ZL	F=185 to 2.2, f= 12.0 - 14.8mm, 5.5 lbs. / 5.6 kg
	F-number, Focal length, Weight	XP-52ZL	F=1.84 to 2.25, f= 14.4 - 19.3mm, 3.5lbs. / 5.5 kg
		XP-53ZL	F=1.8 to 2.24, f= 19.0 - 27.6mm, 3.7 lbs. / 5.3 kg
		XP-54ZL	F=1.8 to 2.24, f= 27.7 - 44.9mm, 3.7 lbs. / 4.5 kg
		XP-55ZL	F=1.84 to 2.58, f= 43.8 - 87.2mm, 3.7 lbs. / 5.4 kg
		XP-56ZL	F=2.0 to 2.5, f= 49.7 to 99.8mm, 3.7 lbs. / 1.7 kg
	Shift Shutter	+/-50% Vertical, +/-20% Horizontal Laser Shutter	
Keystone Correction		+/- 40° horizontal, +/-30° vertical	
Synchronization Range		24-153kHz 50-120Hz	
Supported Video Standards		NTSC, NTSC4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM	
SD/HD Video Signal Compatibility		480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 4K	
PC Signal Compatibility		VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WUXGA, Quad HD	
Macintosh Compatibility		Yes	
Input Terminals	RGB1 (digital)	HDMI (V2.0) w/HDCP (V1.4/2.2)	
	RGB2 (digital)	HDMI (V2.0) w/HDCP (V1.4/2.2)	
	RGB3 (digital)	HDBaseT w/HDCP (V1.4/2.2)	
	RGB4 (digital)	3G SDI (SMPTE ST 424M / SMPTE 292M)	
Output Terminals	Monitor Out	HDBaseT Repeater	
	Audio Out	Stereo Mini Jack	
External Control		9-Pin D-Sub, Wired Remote, HDBaseT, RJ-45, USB (USB 2.0)	
Sync Compatibility		Separate Sync / Composite Sync / Sync on G	
Power Requirements		100-240V AC, 50/60 Hz	
Input Current		11.6A - 5.1A	12.8A - 5.6A
Power Consumption	(ECO off/ECO Mode/ Standby/Standby-Power Saving)	960W / 855W / 0.4W / 0.3W	1035W / 855W / 0.4W / 0.3W
Installation Orientation		Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear	
Product Dimensions (WxDxH)		23.6 x 9.4 x 19.3 in. / 599 x 238 x 490 mm	
Net Weight		63.3 lbs. / 28.7 kg	
Shipping Dimensions (WxDxH)		78.3 lbs. / 35.5 kg	
Gross Weight		29.1 x 15.0 x 24.8 in. / 735 x 382 x 629 mm	
Fan Noise		38 dB normal / 35 dB eco 42 dB normal / 37 dB eco	
Regulations	US	USA UL60950-1: 2005+A1: 2009+A2: 2013, IEC 60825-1:2014 (Ed.3), FCC Part 15 Subpart B (ANSI C63.4.2014)	
	Canada	CAN/CSA C22.2 No.62368-1-18.3rd Edition, ICES-003 Issue 7 (ANSI C63.4-2014)	
Operating	Altitude	0 to 3650 m (12,000 ft)	
	Temperature	41-104°F / 5-40°C	
Storage	Humidity	20 to 85% Humidity (Non-Condensing)	
	Altitude	0-12,000m / 0-39,370ft (above sea level)	
	Temperature	14-122°F / -10-50°C	
	Humidity	20% - 80% (non-condensing)	

* Lens does not ship with the projector. Additional accessories are available, including screens, carts, mount accessories and replacement cables.

Visit www.sharp.ca for details.



SHARP®

SHARP ELECTRONICS OF CANADA LTD.
5995 Avebury Road, Suite 900
Mississauga, Ontario L5R 3P9
1-800-567-4277 • www.sharp.ca

Printed in Canada.
VSG-VS-XP-A155U/A175U-B-E-PDF-11/2025