



YELLOW



SKY BLUE





DARK SILVER

SPECIFICATION

ective pixels	
	16.4 million pixels
	1/ 2.3-inch CMOS with primary color filter
a	Internal memory (approx. 96MB) SD / SDHC / SDXC memory card*1
still image	JPEG (Exif Ver 2.3*2) (Design rule for Camera File system compliant / DPOF-compatible)
movie	Movie File Format: MOV Movie Video Compression: H.264 Audio: Linear PCM Monaural
still images*3	approx. 240 frames (LCD Power Save ON, AUTO mode)
ls	L: [4:3] 4608x3456 [3:2] 4608x3072 [16:9] 4608x2592 [1:1] 3456x3456 M: [4:3] 3264x2448 [3:2] 3264x2176 [16:9] 3264x1840 [1:1] 2432x2432 S: [4:3] 2048x1536 [3:2] 2304x1536 [16:9] 1920x1080 [1:1] 1728x1728 Motion Panorama 360°: [Vertical] 11520x1632 [Horizontal] 11520x1088 180°: [Vertical] 5760x1632 [Horizontal] 3840x1088
ame	Fujinon 5x optical zoom lens
ocal length	f=5.0mm – 25.0mm, equivalent to 28mm – 140mm on a 35mm format
ull-aperture	F3.9 (Wide) – F4.9 (Telephoto)
onstitution	13 elements in 11 groups (includes 4 aspherical elements)
	Intelligent digital zoom: approx. 2x (up to approx. 10x, with 5x optical zoom)
	F3.9 / F6.2 (Wide) F4.9 / F8 (Telephoto)
ce face)	Normal: [Wide] Approx. 60cm to infinity / 1.9ft. to infinity [Telephoto] Approx. 1.0m to infinity / 3.2ft. to infinit Macro: [Wide] Approx. 9cm - 2.0m / 3.5fn - 6.5ft. [Telephoto] Approx. 1.0m - 3.0m / 3.2ft 9.8ft.
	AUTO/ AUTO (400) / AUTO (800) / AUTO (1600) Equivalent to ISO100 / 200 / 400 / 800 / 1600 / 3200 / 6400* (Standard Output Sensitivity) *ISO6400 is effective in image size M or S.
itrol	TTL 256-zone metering
de	Programmed AE
des	Portrait, Landscape, Sport, Night, Night (Tripod), Sunset, Snow, Beach, Under water, Under water (Macro), Party, Flower, Text
	CMOS shift type
	Yes
	-2.0EV -+2.0EV 1/3EV step
-	-2.0EV - +2.0EV 1/3EV step [Auto mode] 1/4sec. to 1/2000sec. [All other modes] 4sec. to 1/2000sec.
	Auto flash
	Effective range when sensitivity is set to AUTO is approx. (wide angle) 70cm – 4.4m / 2.3ft. – 14.4ft. (telephoto) 1.0m – 3.8m / 3.2ft. – 12.4ft. Effective range in macro mode is approx. (wide angle) 30cm – 2.0m / 1.0ft. – 6.5ft. (telephoto) 1.0m – 3.0m / 3.2ft. – 9.8ft.
	3.0-inch, approx. 920K-dot, TFT color LCD monitor, approx. 97% coverage for shooting, 100% for playing back
ng	Full HD 1920×1080 60p/30p (max 29min), HD 1280×720 60p, 640×480 30p with monaural sound, Wind filter. Zoom function can be used. *Use a card with SD Speed Class with class@ or higher.
Standards	IEEE 802.11b/g/n (standard wireless protocol)
Access mode	Infrastructure
Encryption	WEP / WPA / WPA 2 mixed mode
Standards	Bluetooth Ver 4.1 (Bluetooth low energy)
Operating Frequency	2402 – 2480MHz (Center frequency)
tion	Smartphone sync. Setting (Location setting / Time setting) / Geotagging / Wireless communication (Image transfer) / View & Obtain Images / Remote camera shooting / PC Autosave / instax Printer Print / Pairing registration / Delete pairing registration / Bluetooth ON/OFF setting / Auto image transfer
	Li-ion battery NP-45S (included)
	109.6mm (W) ×71.0mm (H) ×27.8mm (D) / 4.3in. (W) × 2.7 in. (H) ×1.0in. (D) *excluding projections
	109.011111 (VV) X7 1.011111 (F) X27.011111 (D) 7 4.3111. (VV) X 2.7 111. (F) X1.0111. (D) EXCIDENTS
	still image movie movie still images and still images. It is arme cocal length all-aperture constitution are related by the still images and still images. It is a still images and still images are related by the still image and still images. It is a still image and still images are related by the still image and still images. It is a still image and still images are related by the still image and still images are related by the still image and still images. It is a still image and still images are related by the still image and still images are related by the still images. It is a still image and still images are related by the st

For more information, please visit our Website:

http://www.fujifilm.com/products/digital_cameras/xp/finepix_xp130/







4-way proof active camera







20m



1.75m



-10°C














^{*1} Please see the Fujifilm website to check memory card compatibility.

*2 Exif 2.3 is a digital camera file format that contains a variety of shooting information for optimal printing.

*3 Approximate number of frames / period that can be taken with a fully-charged battery based on CIPA standard.

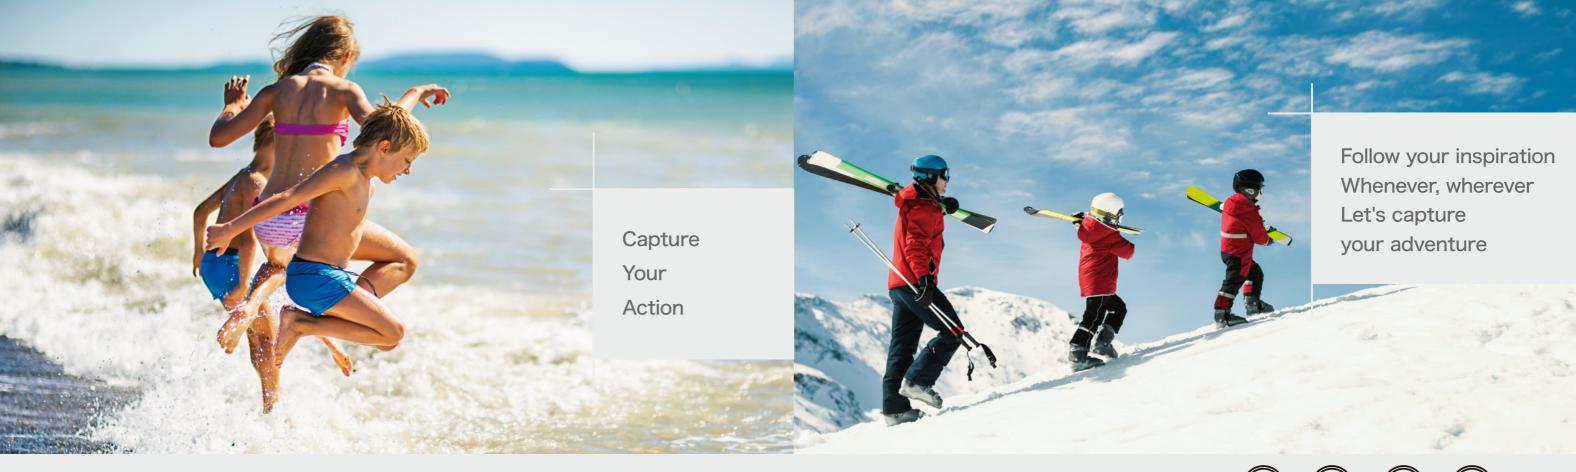



Advanced Image Quality from a Compact and Rugged Camera Body

BACK-ILLUMINATED SENSOR & OPTICAL IMAGE STABILIZATION

The camera features a 16.4 megapixel back-illuminated CMOS sensor, capable of delivering advanced image quality even in underwater or low light conditions. Its CMOS-shift optical image stabilization system controls camera shake even in low light or when zoomed in.

FUJINON 5X OPTICAL ZOOM LENS

Equipped with a zoom lens that starts from the convenient 28mm*1 at the wide angle end, the XP130 has a 5x optical zoom system which gives extra breadth and depth to your image. The use of the Intelligent Digital Zoom function extends the zoom range up to 10x.







Comfortable operation under various situations

LARGE 3-INCH HIGH-DEFINITION 920K-DOT LCD MONITOR

The XP130 uses a large 3-inch TFT LCD. This high-definition 920K-dot monitor displays photos with exceptional clarity. The monitor sits flush in the compact camera body, which weighs only 207g*2. Its anti-reflective coating ensures a clear view even in extremely bright conditions. The monitor's brightness is automatically adjusted according to the level of ambient light to reduce unnecessary use of battery power. *2 Including Battery and Memory Card

LONG BATTERY LIFE

The battery life has improved by 15%*3 against the conventional model. You can take as many as 240 images with a one time charge.

*3 Compared to "FinePix XP120", LCD power save ON

AUTO TIME ADJUSTMENT & GEOTAGGING FUNCTION

Pair your smartphone with the camera to synchronize your location and time information. This function will automatically adjust the camera's timezone and record the location you are in, helping you to create lots of travel memories.













Versatile functions to upgrade your photography

ELECTRONIC LEVEL & EYE DETECTION

You can enable the Electronic Level on the XP130's 3.0 inch LCD. This is a particularly useful function when you want to capture a horizontal subject, such as a beautiful landscape or solid architecture. The Eye Detection feature helps to capture portraits more easily by automatically focusing on your subject's eyes.





Creative Function

CINEMAGRAPH

Enhance your images by freezing the background and only activating the main subject. It's very easy to create this effect with the XP130 - simply capture up to 5 seconds of a movie, and pinpoint your main subject.





Bluetooth*



Wireless Communication

CONNECT WITH BLUETOOTH® ★4

Activate the continuous low energy Bluetooth® connection using your smartphone or tablet device to share images from the camera to your device. Wireless transfer is also available for the Instax SHARE printer, allowing you access to instant prints to enjoy wherever you are.



REMOTE CAMERA OPERATIONS*4

You can control the camera's settings and take photos remotely by using the camera remote app via your smartphone or other tablet device. It's now even easier to take fun group photos and selfies!

