

Phone: 802-874-0123 Fax: 703-991-8770


Email: sales@tsitouch.com

tsitouch.com

NEC 48" Infrared Touch Screen Solution



NEC

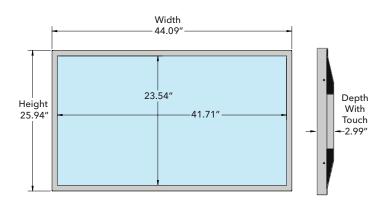

Infrared Interactive Solution

The TSItouch solution is Infrared based, allowing for a high accuracy interactive experience. The usage of Infrared technology allows for virtually any input to be detected (pen/stylus, user's fingers, palms, gloved fingers). The TSItouch solution is a cold rolled steel chassis integrated with tempered cover glass, which increases durability and optical clarity, while protecting the display.



Multi-Touch Screen
True multi-touch support
for all major operating
systems. 10 simultaneous
touch points are available.



Easy Integration Unrivaled simplicity makes installation easier and faster



Ultra-Fast Response Time Allows for split second reactions between touch point and screen



HID Compliant Maximum compatibly with numerous operating systems, plug-and-play



Superior Design Cold rolled steel chassis combined with tempered glass provides additional protection to the LCD panel



Customizable
Custom colors and silk
screening available

Specifications	
Display Models	P484, V484
Touch Screen (Display Not Included)	TSI48NN10TACCZZ
P484 Integrated Touch Screen (Display Included)	TSI48PNPHTACCZZ
V484 Integrated Touch Screen (Display Included)	TSI48PNPYTACCZZ
Protective Glass	1/8" Clear Tempered Cover Glass
Structure Material	Black Powder Coated Cold Rolled Steel
Touch Technology	IR
Touch Points	10
Response Time	6 - 16ms
Touch Accuracy	+/- 2mm (Over 99% Area)
Interface	Type A USB/M
Communication	USB 2.0
Receiver Extender	N/A
Touch Power Source	USB
Width/Height/Depth Including Monitor	44.09" x 25.94" x 2.99"
Touch Screen Weight	25.79 lbs
Display Integrated Weight	64.60 lbs
Boxed Dimensions	46.25" x 28.25" x 7.75"
OS Support	Windows, Google Chrome, Android, Mac, Linux