

4XEM's 30W Wall Charger Triple Output w/ display

4XEM Part- 4XGAN01130WB



4XEM's 30W USB-C Charger offers amazing charging power and speed with three USB ports capable of charging a variety of devices simultaneously. USB-A has long been a standard port allowing for charging or power to legacy and current devices; however, USB-C is rapidly becoming a new standard for charging devices, allowing for up to 30W charging for power at faster speeds. This device features 1x USB-C port and 2x USB-A ports. Keep your USB devices charged on the go or at home reliably with 4XEM's USB-C and A Charger.

Problem it solves: Charge one to three USB devices with reliable power and speed using 4XEM's 30W GaN Charger.

4XEM Products Are Available At Your Favorite Online Retailers


WWW.4XEM.COM

Contact Todd Schaus 4XEM sales Rep
1-866-999-4936 Ext.104 tschaus@4xem.com



Features:

- 30-Watt power budget
- 1x USB-C port
- 2x USB-A port
- Wall mounted charger
- Compatible with any USB charged device
- Compact travel size
- Rounded edges
- Fast Charging

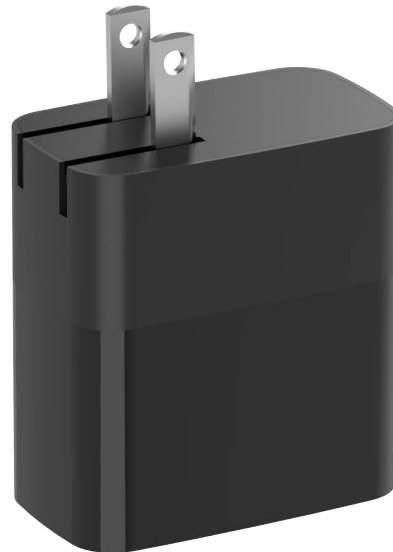

Applications:

- Home
- Office
- Travel
- Meetings
- Classrooms
- Quick Charging

4XEM Products Are Available At Your Favorite Online Retailers





DATA SHEET

Warranty Information	Warranty	1 Year
Connector(s)	Charging Port(s)	1x USB Type-C Female 2x USB Type-A Female
	Power Source	Non-Polarized NEMA 1-15P (Standard NA Wall Outlet) Fixed with Retractable Prongs
Performance	Industry Standards Certifications	USB-PD 3.0 PPS CE ROHS REACH
Physical Characteristics	Colour	Black
	Display	Yes
	LED Indicator(s)	None
	Power Cable Length	N/A
	Product Height	2.06 in [52.2 mm]
	Product Width	1.16 in [29.5 mm]
	Product Length	2.22 in [56.5 mm]
	Weight of Product	2.85 in [72.5 mm] (with power prongs out) 2.75 oz [78 g]
Power	Total Power Budget	30W
	Power Delivery	30W Max
	Input Voltage	100-240VAC, 50Hz-60Hz @ 0.85A
	Output Voltage (C1)	30W: 5/9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A 29.7W PPS: 3.3V-11V 2.7A
	Output Voltage (A1/A2)	18W: 5V 3A, 9V 2A, 12V 1.5A
	Output Voltage (C1)+(A1/A2)/(A1)+(A2)/(C1)+(A1)+(A2)	15W: 5V 3A (Shared)
Environmental	Operating Temperature	32°F to 104°F [0°C to 40°C]
	Storage Temperature	-4°F to 176°F [-20°C to 80°C]
	Humidity	5% to 90% (non-condensing)
Packaging Information	Package Type	Poly-Bag
	Package Height	6.00 in [152.4 mm]
	Package Width	4.00 in [101.6 mm]
	Package Length	1.17 in [29.7 mm]
	Shipping (Package) Weight	2.82 oz [80 g]
What's in the Box	Included in Package	1x 30W USB-C + Dual USB-A GaN Charger

* Product appearance and specifications are subject to change without notice.
* Same day shipping is only available for orders shipping within the United States.

4XEM Products Are Available At Your Favorite Online Retailers

WWW.4XEM.COM

**Contact Todd Schaus 4XEM sales Rep
1-866-999-4936 Ext.104 tschaus@4xem.com**

