


24-Port 1U Rack-Mount Cat6a/Cat6/Cat5e 110 Punchdown, RJ45, TAA

NUMÉRO DE MODÈLE : N252-024-6A

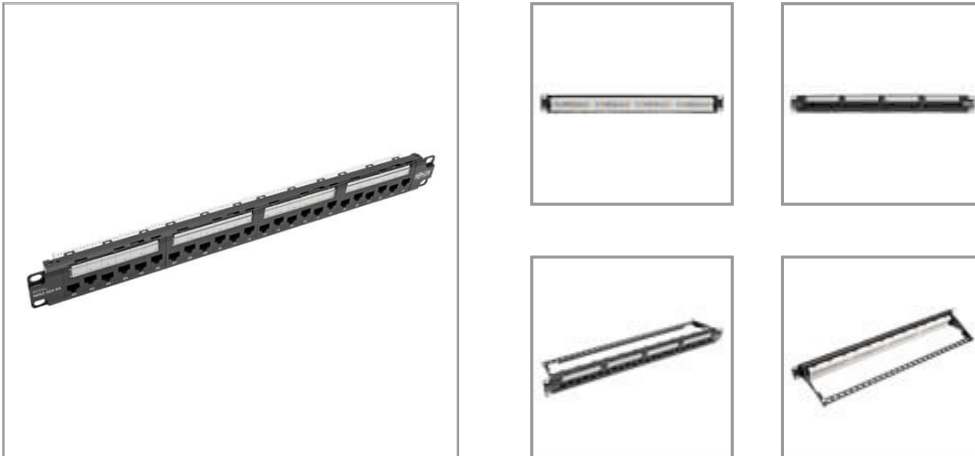

24-port Cat6a patch panel manages and organizes Cat6a input and output cable connections in your high-density 10 Gbps Ethernet network. 110 punchdown termination required.

Présentation générale

The N252-024-6A 24-Port 1U Rack-Mount Cat6a/Cat6/Cat5e 110 Patch Panel meets or exceeds Cat6a specifications and works with T568A and T568B wiring to comply with industry standards. Fully rated for 10 Gbps Ethernet data transfer speeds, this low-profile rack-mount patch panel manages and organizes the cabling in your high-density network.

110 punchdown termination is required. The detachable cable management bar keeps patch cables neat, tidy and efficiently organized on the back of the panel. Ports are clearly numbered and labeled to help you identify connections. The 24-port Cat6 patch panel mounts easily into 1U of an EIA-standard 19-inch rack. Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases.

IEC 60512-99-002 Compliant

PoE Certificate Number: 2019-248

110/Krone Dual IDC

UTP Cat6a 22-24 AWG solid cable (Requires PoE cable if used in PoE setting)

Fonctionnalités

Rack-Mount Patch Panel Manages and Organizes High-Density Network Cabling

- Meets or exceeds Cat6a specifications
- Fully rated for 10 GbE data transfer speeds
- UL approved

110 Punchdown Termination Required

- Works with T568A and T568B wiring to comply with industry standards
- Ports are numbered and labeled for easy connection identification

Cable Management Bar on Rear

- Detachable bar keeps patch cables neat, tidy and organized

Points principaux

- Meets or exceeds Cat6a specifications
- 24 RJ45 ports numbered and labeled for easy ID
- Cable management bar keeps patch cables organized
- Fully rated for 10 GbE data transfer speeds
- Mounts into 1U of EIA-standard 19 in. racks

Inclut dans l'emballage

- N252-024-6A 24-Port 1U Rack-Mount Cat6a/Cat6/Cat5e 110 Patch Panel
- Detachable cable management bar
- (8) Cable ties
- ID label
- Owner's manual

Quick, Easy Installation

- Mounts into 1U of EIA-standard 19 in. racks

TAA-Compliant for GSA Schedule Purchases

- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule Purchases

Caractéristiques

APERÇU	
Code UPC	037332205636
Technologie	Cat5/5e; Cat6; Cat6a
Physiques	
Couleur	Noir
Gestion de câbles	Barre
Connexions	
Ports	24
Côté A - Connecteur 1	IDC 110
Côté B - Connecteur 1	RJ45 (FEMELLE)
PoE Power Budget (watts)	90
Type de PoE	4PPoE (Type 3)
NORMES et CONFORMITÉ	
Certifications	RoHS
Garantie	
Période de garantie du produit (Mondiale)	Garantie limitée à vie

© 2021 Tripp Lite. Tous les droits sont réservés. Tous les noms de produits et de sociétés sont des marques commerciales ou des marques déposées de leurs détenteurs respectifs. Leur utilisation ne comporte aucune affiliation avec ou approbation par eux. Tripp Lite a une politique d'amélioration continue. Les spécifications sont sujettes à modification sans préavis. Tripp Lite utilise les agences primaires et de tiers pour tester ses produits pour conformité aux normes. Voir la liste des agences d'essais de Tripp Lite : <https://www.tripplite.com/products/product-certification-agencies>