# 70" 10-Point Touch Interactive Commercial Display



Built-in Dual Core ARM CPU and Pre-installed ViewBoard Software

**CDE7061T** 



For interactive learning in the classroom, or brainstorming in the boardroom, the ViewSonic® CDE7061T is the ideal interactive display solution to increase engagement and collaboration. With astonishing 10-point simultaneous touch capabilities and pre-installed annotation software, this 70" large format display lets multiple users write or draw on the screen with their fingers and styluses. An embedded ARM dual-core processor and Android® OS provide lightning-fast computing and smooth touch capabilities, ensuring that students and co-workers alike enjoy a responsive screen with each tap, pinch, and swipe. What's more, Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods. An optional slot-in PC provides additional computing power, while the included ViewBoard™ for Education software delivers more robust annotation options that make presentations in the classroom even more productive and interactive.

## **Key Features:**

10-point multi-touch interactive screen

Built-in ARM Dual Core CPU with 8GB storage

Pre-installed ViewBoard software

**Optional slot-in PC** 

Control multiple devices through RS232 or LAN

## **Designed for:**


Education


**Business** 

# 70" 10-Point Touch **Interactive Commercial Display**



**CDE7061T** 

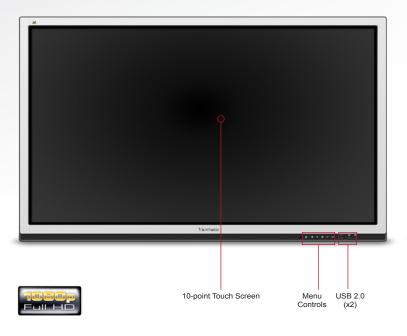

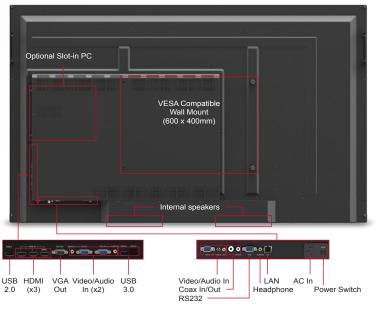

### **Specifications**

PANEL	Type Display Area Optimum Resolution Contrast Ratio Viewing Angles Response Time Light Source Brightness Aspect Ratio Panel Surface	TFT LCD Module with LED Backlight 61.0" horizontal x 34.3" vertical; 70.0" diagonal 1920 x 1080 4000:1 (typ) 178° horizontal, 178° vertical 5ms (typ) Long life, 50,000 hrs. (typ) 350 cd/m² 16:9 Anti-glare, hard coating 7H scratch resistant
INPUT	Video Input Video Output Control Input	HDMI, VGA VGA RS232
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)
EMBEDDED PLAYER	Android Version CPU Memory Storage Networking	4.2.1 ARM Cortex A9 Dual Core CPU 1.5 GB 8GB Integrated 10/100/Gigabit
INPUT SIGNAL	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p, 4K2K
CONNECTOR	Analog Digital Power	15-pin mini D-sub (x3), RCA Audio In (x3), headphone out 1080p HDMI (x3), CVBS, SPDIF, USB 2.0 (x3), USB 3.0 (x1), LAN, RS232 3-pin plug

CONTROLS	Panel OSD Embedded Player Multimeda	Power, Home, Return, Setting, Vol-, Vol+ Input, Volume, Backlight, Audio, Screen, Display, Adjust Setting, Annotation, Viewboard Embedded, Interface Image, Audio, Video
POWER	Voltage Consumption	AC 100-240V (universal), 50-60Hz 222W (typ)
OPERATING CONDITIONS	Temperature Humidity	32-104°F (0–40°C) 20-80% (non-condensing)
DIMENSIONS (W x H x D)	Physical Packaging	65.6 x 40.0 x 3.9 in. / 1665 x 1015 x 98 mm 71.0 x 44.6 x 9.6 in. / 1803 x 1134 x 243 mm
WEIGHT	Net Gross	121.25 lbs / 55 kg 149.9 lbs / 68 kg
WALL MOUNT	VESA® Compatible	600 x 400 mm
REGULATIONS		FCC, cTUVus, Mexico NOM, CE, BSMI, RCM, CCC
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts and labor

### **Optional Accessories**

- реготова	
i5 Slot-in PC	
i7 Slot-in PC	NMP712-N
The Solstice Pod™ SGE - 4 Users	NMP250-WL
The Solstice Pod - Unlimited Users	NMP250-WU
Solstice Software <sup>™</sup> SGE - 4 Users	SW-51*
Solstice Software - Unlimited Users	SW-50*
Trolley Cart	LB-STND-003
Wall Mount	WMK-047

### What's in the box?

CDE7061T display, power cable, VGA cable, audio cable, USB cable, RS232 adapter, remote control with batteries, stylus (x3), ViewSonic Wizard CD (User Guide and ViewBoard software)







