

HP EliteDesk 8 SFF G2a Desktop PC




- | | |
|---|--|
| 1. Slim optical drive (optional) | 4. Combo Audio Jack with CTIA and OMTP headset support |
| 2. Type-C® SuperSpeed USB 20Gbps signaling rate port (charge support up to 5V/3A) | 5. Dual-state power button |
| 3. (4) Type A SuperSpeed USB 10Gbps signaling rate port | 6. Hard drive activity light |

Not shown

- (1) PCI Express Gen4 x16¹
- (1) PCI Express Gen3 x1
- (3) M.2 (1 as M.2 2230 socket for WLAN/Bluetooth® and 2 as M.2 2280 socket for storage)

1. Only discrete graphics cards can be inserted.

HP EliteDesk 8 SFF G2a Desktop PC

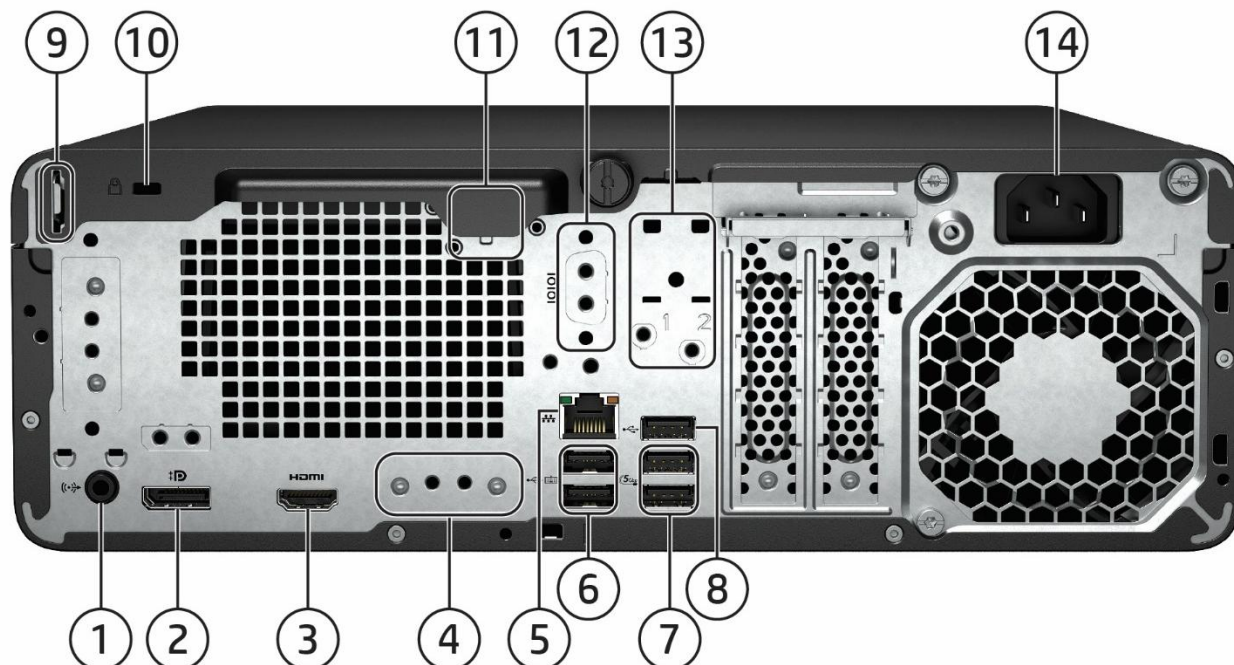

- | | |
|--|--|
| 1. Audio line-out jack (supports line-in re-tasking) | 6. (2) Type A Hi-Speed USB 480 Mbps signaling rate port with wake from S4/S5 |
| 2. Dual-Mode DisplayPort™ 2.1 HBR3 (DP++) | 7. (2) Type A SuperSpeed USB 5Gbps signaling rate port |
| 3. HDMI port 2.1 | 8. (1) Type A SuperSpeed USB 5Gbps signaling rate port |
| 4. Optional port, choice of <ul style="list-style-type: none"> • DisplayPort™ 2.1 • HDMI 2.1 • VGA • 1Gbps Fiber NIC • Thunderbolt™ 4 • Serial | 9. Padlock loop |
| | 10. K-lock |
| | 11. Standard cable lock slot |
| | 12. Serial Port (optional) |
| | 13. Solenoid lock |
| 5. RJ45 network connector | 14. Power cord connector |

Not shown

Optional Ports

Optional Parallel port¹

Optional 4 Serial Port PCIe Card (1 to 4 serial port dongle)^{1,2}

1. Each of the legacy port options would occupy one rear PCIe slot.

2. Available for selected countries only.

Bays

(1) 3.5" internal storage drive bay

(1) Slim optical drive bay (ODD)

HP EliteDesk 8 SFF G2a Desktop Next Gen AI PC



- | | |
|---|--|
| 1. Slim optical drive (optional) | 4. Combo Audio Jack with CTIA and OMTP headset support |
| 2. Type-C® SuperSpeed USB 20Gbps signaling rate port (charge support up to 5V/3A) | 5. Dual-state power button |
| 3. (4) Type A SuperSpeed USB 10Gbps signaling rate port | 6. Hard drive activity light |


Not shown

- (1) PCI Express Gen4 x16¹
- (1) PCI Express Gen3 x1
- (3) M.2 (1 as M.2 2230 socket for WLAN/Bluetooth® and 2 as M.2 2280 socket for storage)

1. Only discrete graphics cards can be inserted.

Overview

HP EliteDesk 8 SFF G2a Desktop Next Gen AI PC

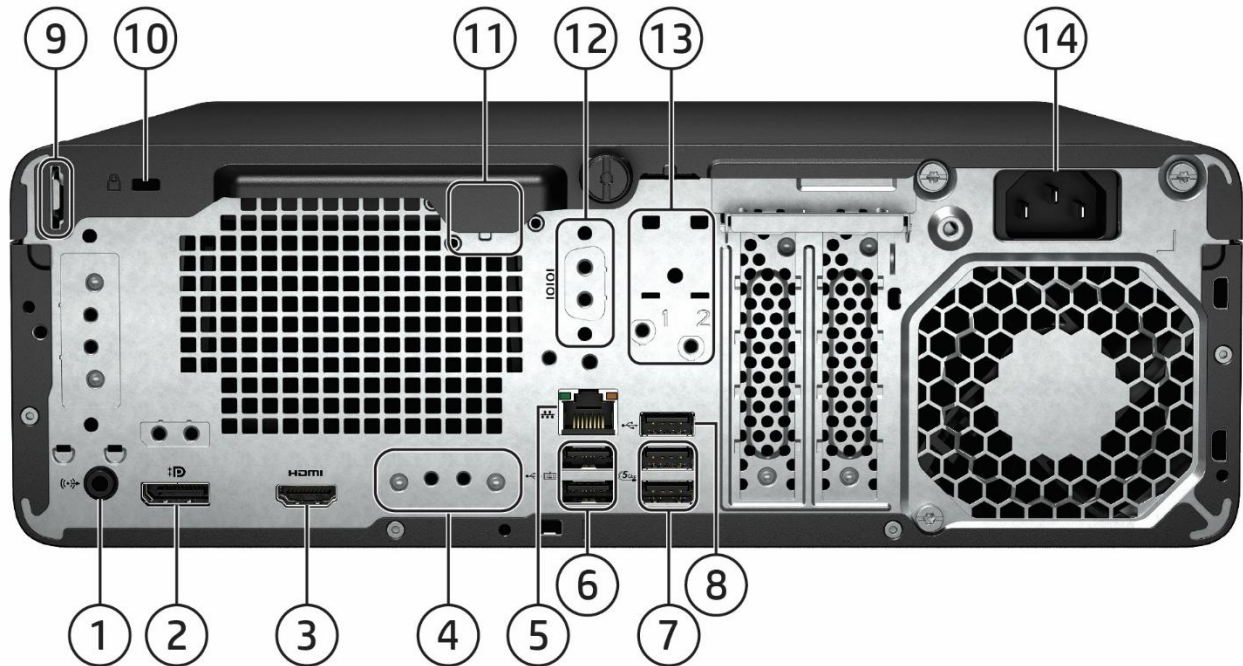

1. Audio line-out jack (supports line-in re-tasking)
2. Dual-Mode DisplayPort™ 2.1 HBR3 (DP++)
3. HDMI port 2.1
4. Optional port, choice of
 - DisplayPort™ 2.1
 - HDMI 2.1
 - VGA
 - 1Gbps Fiber NIC
 - Thunderbolt™ 4
 - Serial
 - Dual Type-A SuperSpeed USB 5Gbps signaling rate port
 - USB-C® SuperSpeed 10Gbps signaling rate port (Alt Mode DP 1.4 with 15W output)
 - Dual Type-C SuperSpeed USB 10Gbps signaling rate port
5. RJ45 network connector
6. (2) Type A Hi-Speed USB 480 Mbps signaling rate port with wake from S4/S5
7. (2) Type A SuperSpeed USB 5Gbps signaling rate port
8. (1) Type A SuperSpeed USB 5Gbps signaling rate port
9. Padlock loop
10. K-lock
11. Standard cable lock slot
12. Serial Port (optional)
13. Solenoid lock
14. Power cord connector

Optional Ports

Parallel port¹

Optional 4 Serial Port PCIe Card (1 to 4 serial port dongle)^{1, 2}

1. Each of the legacy port options would occupy one rear slot.

2. Available for selected countries only.

Bays

(1) 3.5" internal storage drive bay

(1) Slim optical drive bay (ODD)

Features

PRODUCT NAME

HP EliteDesk 8 SFF G2a Desktop PC
HP EliteDesk 8 SFF G2a Desktop Next Gen AI PC

OPERATING SYSTEM

Preinstalled	Windows 11 Pro ¹
	Windows 11 Pro Education ¹
	Windows 11 Home - HP recommends Windows 11 Pro for business ¹
	Windows 11 Home Single Language - HP recommends Windows 11 Pro for business ¹
	Windows 11 Pro Windows 11 Enterprise (Available with a Volume Licensing Agreement) ¹
	FreeDOS

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

CHIPSET

AMD PRO 665

Features

PROCESSORS^{1,2}

AMD® Ryzen™ AI 400 series Processors with 50 TOPS NPU, PRO technologies and integrated AMD® Radeon™ Graphics

AMD Ryzen™ AI 7 PRO 450G with Radeon™ 860M Graphics (2.0 GHz base clock, up to 5.1GHz max boost clock, 24 MB cache, 8 cores, 16 threads, 65W)
AMD Ryzen™ AI 7 450G with Radeon™ 860M Graphics (2.0 GHz base clock, up to 5.1GHz max boost clock, 24 MB cache, 8 cores, 16 threads, 65W)
AMD Ryzen™ AI 5 PRO 440G with Radeon™ 840M Graphics (2.0 GHz base clock, up to 4.8 GHz max boost clock, 22 MB cache, 6 cores, 12 threads, 65W)
AMD Ryzen™ AI 5 440G with Radeon™ 840M Graphics (2.0 GHz base clock, up to 4.8 GHz max boost clock, 22 MB cache, 6 cores, 12 threads, 65W)
AMD Ryzen™ AI 5 PRO 435G with Radeon™ 840M Graphics (2.0 GHz base clock, up to 4.5 GHz max boost clock, 22 MB cache, 6 cores, 12 threads, 65W)
AMD Ryzen™ AI 5 435G with Radeon™ 840M Graphics (2.0 GHz base clock, up to 4.5 GHz max boost clock, 22 MB cache, 6 cores, 12 threads, 65W)

AMD® Ryzen™ 8000 series Processors with PRO technologies and integrated AMD® Radeon™ Graphics

AMD Ryzen™ 7 PRO 8705G with Radeon™ 780M Graphics and 16 TOPs NPU (4.2GHz base clock, up to 5.1GHz max boost clock, 24 MB cache, 8 cores, 16 threads, 65W)
AMD Ryzen™ 7 8705G with Radeon™ 780M Graphics and 16 TOPs NPU (4.2 GHz base clock, up to 5.1GHz max boost clock, 24 MB cache, 8 cores, 16 threads, 65W)
AMD Ryzen™ 5 PRO 8605G with Radeon™ 760M Graphics and 16 TOPs NPU (4.3 GHz base clock, up to 5.0 GHz max boost clock, 22 MB cache, 6 cores, 12 threads, 65W)
AMD Ryzen™ 5 8605G with Radeon™ 760M Graphics and 16 TOPs NPU (4.3 GHz base clock, up to 5.0 GHz max boost clock, 22 MB cache, 6 cores, 12 threads, 65W)
AMD Ryzen™ 5 PRO 8505G with Radeon™ 740M Graphics (3.5 GHz base clock, up to 5.0 GHz max boost clock, 22 MB cache, 6 cores, 12 threads, 65W)
AMD Ryzen™ 5 8505G with Radeon™ 740M Graphics (3.5 GHz base clock, up to 5.0 GHz max boost clock, 22 MB cache, 6 cores, 12 threads, 65W)
AMD Ryzen™ 3 PRO 8305G with Radeon™ 720M Graphics (3.4 GHz base clock, up to 4.9 GHz max boost clock, 12 MB cache, 4 cores, 8 threads, 65W)
AMD Ryzen™ 3 8305G with Radeon™ 720M Graphics (3.4 GHz base clock, up to 4.9 GHz max boost clock, 12 MB cache, 4 cores, 8 threads, 65W)

1. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. AMD's numbering is not a measurement of clock speed.

2. NPU available on select AMD Ryzen™ 8000 series processors. Must be configured at time of purchase. Features and software that require a NPU may require software purchase, subscription or enablement by a software or platform provider, and third-party software may have specific configuration or compatibility requirements. Performance varies by use, configuration, and other factors.

Features

GRAPHICS

System Integrated Graphics

AMD® Radeon™ 860M Graphics (Integrated in Ryzen™ AI 7 450G, Ryzen™ AI 7 PRO 450G)
AMD® Radeon™ 840M Graphics (Integrated in Ryzen™ AI 5 435G, 440G / Ryzen™ AI 5 PRO 435G, 440G)
AMD® Radeon™ 780M (Integrated in Ryzen™ 7 8705G, Ryzen™ 7 PRO 8705G)
AMD® Radeon™ 760M ((Integrated in Ryzen™ 5 8605G, Ryzen™ 5 PRO 8605G)
AMD® Radeon™ 740M (Integrated in Ryzen™ 5 8505G, Ryzen™ 5 PRO 8505G, Ryzen™ 3 8305G, Ryzen™ 3 PRO 8305G)

Note: Integrated graphics support up to 4 display signals.
Support up to 7 displays when configured with 1 video port flex IO and 1 discrete graphics.

Optional Discrete Graphics Solutions

NVIDIA® A400 4GB GDDR6 Graphics card ^{1,2}
NVIDIA® A1000 8GB GDDR6 Graphics card ^{1,2}

- 1. Not available with 180W power supply.
- 2. Support up to 7 displays via native video ports, a configurable Flex IO port and selected discrete graphics

Adapters and Cables

HP DisplayPort™ Cable
HP USB to Serial Port Adapter
HP HDMI Standard Cable Kit (HDMI)

Features

STORAGE

NOTE: Starting November 1, 2023, HP PCs with Windows require Windows to be installed on SSD. HDD can only be configured as additional data drives and not as the boot drive.

3.5 inch SATA Hard Disk Drives (HDD)

1TB* 7200RPM SATA HDD

2TB* 7200RPM SATA HDD

M.2 PCIe NVMe Solid State Drives (SSD)¹

256GB M.2 2280 PCIe NVMe SSD

512GB M.2 2280 PCIe NVMe SSD

1TB M.2 2280 PCIe NVMe SSD

512GB M.2 2280 PCIe Gen5 NVMe SSD

1TB M.2 2280 PCIe Gen5 NVMe SSD

2TB M.2 2280 PCIe Gen5 NVMe SSD

512GB M.2 2280 PCIe Gen5 NVMe Self Encrypted OPAL2.SSD ²

256GB M.2 2280 PCIe OPAL2 NVMe SSD

1. For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32 GB (for Windows) of system disk is reserved for the system recovery software.

2. Storage DriveLock does not work with Self Encrypting or Optane based storage.

Optical Disc Drives

HP 9.5mm Slim DVD-ROM Drive ¹
--

HP 9.5mm Slim DVD Writer Drive ¹

1. HD-DVD disks cannot be played on this drive. No support for DVD-RAM. Actual speeds may vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs. Discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

Features

MEMORY

Memory Type

DDR5-5600, Max 64GB, 2 UDIMM

***NOTE:** Memory modules support data transfer rates up to 5600 MT/s; system speed up to 4800 MT/s for Ryzen 8000 series processors, following AMDs design guideline. Actual data rate is determined by the system configuration.

***NOTE:** Symmetric configurations are required for the 2 DIMMs within the same memory channel.

***NOTE:** To achieve optimal memory speed, HP strongly recommends using identical memory modules (e.g., same capacity, same part number and from the same supplier) within the same memory channel

***NOTE:** All memory slots are customer accessible / upgradable.

Memory Configuration

8GB (1 x 8GB)

16GB (2 x 8GB)

16GB (1 x 16GB)

24GB (1 x 24GB)

32GB (2 x 16GB)

32GB (1 x 32GB)

64GB (2 x 32GB)

NETWORKING/COMMUNICATIONS

Ethernet (RJ-45)

Ethernet RTK RTL8111EPP 1GbE

Intel® I226-T1 2.5GbE Ethernet Network Adapter
--

Wireless

Mediatek MT7925 Wi-Fi 7 +Bluetooth® 6.0 wireless card AIM-T WW WLAN ¹
--

Mediatek RZ616 Wi-Fi 6E +Bluetooth® 5.3 wireless card AIM-T WW WLAN ²
--

Realtek RTL8852BE 802.11ax 2x2 Wi-Fi 6 + Bluetooth® 5.4 Wireless Card ³
--

1. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 7 (802.11BE) functionality requires compatible Windows 11 OS, compatible processor, and separately purchased Wi-Fi 7 router to support backwards compatibility with prior 802.11 specs. Available in countries where Wi-Fi 7 is supported. The specification for 802.11BE is a draft specification and is not final. If the final specification differs from the draft specification, it may affect the ability of the device to communicate with other 802.11BE devices.

2. Wi-Fi 6E requires a Wi-Fi 6E router, sold separately to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 6E is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported.

3. Wi-Fi 6 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.

Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 (802.11ax) is backwards compatible with prior 802.11 specs.

Features

KEYBOARDS AND POINTING DEVICES

Keyboards

HP 175 Wired Keyboard
HP 175 AntiMicrobial Wired Keyboard (China Only)

Keyboard and Mouse Combo

HP 275 Wireless Keyboard and Mouse Combo
--

*Copilot in Windows requires Windows 11. Some features require an NPU. Timing of feature delivery and availability varies by market and device. Requires Microsoft account to log in. Where Microsoft in Windows is not available, the Copilot key will lead to the Bing search engine. Use of Recall requires customer authentication using Windows Hello Enhanced Sign in Security (ESS) which requires a fingerprint reader or facial recognition camera and may not be supported on all platforms. See <http://aka.ms/WindowsAIFeatures>

Mouse

HP 175 Wired Mouse
HP 175 Antimicrobial Wired Mouse (China Only)

SECURITY

TPM 2.0 endpoint security controller (Nuvoton NPCT760HABYX). Common Criteria EAL4+ Certified. FIPS 140-2 Level 2 Certified.
Support for chassis cable lock devices
Support for chassis padlocks devices
SATA port disablement (via BIOS)
Serial, USB enable / disable (via BIOS)
Serial, parallel, USB enable / disable (via BIOS)
Optional USB Port Disable at factory (user configurable via BIOS)
Removable media write/boot control
Power-on password (via BIOS)
Setup password (via BIOS)
Intrusion Sensor (optional)

Features

PORTS

I/O Ports – Internal Ports

PCI Express 4.0 x16	1
PCI Express 3.0 x1	1
SATA 3.0 (6Gbps signaling rate) port	2
M.2 PCIe	(1) M.2 PCIe 4 x 1 2230 (for WLAN) (2) M.2 PCIe 4 x 4 2280 (for storage)

NOTE: PCI slots for SFF are low profile.

Standard User Accessible Ports

Type-A Hi-Speed USB 480Mbps signaling rate port	3 (rear)
Type-A SuperSpeed USB 5 Gbps signaling rate port	2 (rear)
Type-A SuperSpeed USB 10 Gbps signaling rate port	4 (front)
Type-C® SuperSpeed USB 20Gbps signaling rate port	1 (front)
Video ¹	1 DisplayPort™ 2.1 HBR3 1 HDMI 2.1
Audio	1 Universal Audio Jack with CTIA and OMPT headset support (front); 1 Audio-Line-in/Line out (rear)

1. For actual resolution supported, refer to the Graphics section of this document.

(1) Flexible Port 1, choice of one of the following:

Dual Type-A SuperSpeed USB 5 Gbps signaling rate port	1
Dual SuperSpeed USB Type-C 10Gbps signaling rate port with 15W power out	1
Type-C® SuperSpeed USB 10Gbps signaling rate port	1
Video	1 DisplayPort™ 2.1 <u>or</u> HDMI 2.1 <u>or</u> VGA
Serial	1
Thunderbolt™ 4.0	1
Fiber NIC	1
RJ-45 Ethernet	1 ¹

1. Occupies a PCIe slot

Bays

Slim Optical Disc Drive (ODD or removable storage, optional)	1
3.5" Internal Storage Drive	1



Features

USB SPECIFICATION AND MARKETING NAME MAPPING TABLE

Marketing Name	Technical Terminology
Hi-Speed USB 480Mbps signaling rate	USB 2.0
SuperSpeed USB 5Gbps signaling rate	USB 3.2 Gen 1
SuperSpeed USB 10Gbps signaling rate	USB 3.2 Gen 2
SuperSpeed USB 20Gbps signaling rate	USB 3.2 Gen 2x2



Features

SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

Software

Buy Microsoft Office (Sold Separately)¹
Edge Customization
HP Connection Optimizer
HP Desktop Support Utilities
HP Notifications
HP PC Hardware Diagnostics UEFI
HP PC Hardware Diagnostics Windows
HP Privacy Settings
HP Services Scan²
HP Support Assistant³
HSA Fusion for Commercial
HSA Telemetry for Commercial
HP app (BNB, MWS, SFF & TWR) or HP app with Multicamera support (AIO & Mini)⁴
Poly Studio Desktop⁵
HP IQ⁶

Manageability Features

HP Client Catalog (download)⁷
HP Client Management Script Library (download)⁸
HP Cloud Recovery⁹
HP Connect for Microsoft Endpoint Manager¹⁰
HP Driver Packs (download)¹¹
HP Image Assistant (download)¹²
HP Manageability Integration Kit (download)¹³
HP Patch Assistant (download)¹⁴

Security Features

HP Secured-Core PC Enable¹⁵
Windows Hello Enhanced Sign-In Security
HP Wolf Security for Business¹⁶ includes:
HP Sure Admin¹⁷
HP Sure Click¹⁸
HP Sure Recover¹⁹
HP Sure Run²⁰
HP Sure Sense²¹
HP Sure Start²²
HP Tamper Lock²³

BIOS

Absolute Persistence Module²⁴
HP Bios Recovery
HP BIOS Update via Network
HP BIOSphere²⁵
HP Secure Erase²⁶
HP & Automatic DriveLock
TPM
UEFI Self Certification Level: 2.9

Features

1. Microsoft 365 sold separately and requires Internet access for activation.
2. HP Services Scan automatically collects the telemetry necessary upon initial boot of the product to deliver device-level configuration data and health insights and is available preinstalled on select products, thru HP Factory Configuration Services; or it can be downloaded. For more information about how to enable HP Smart Support or for download, please visit <http://www.hp.com/smart-support>.
3. HP Support Assistant is available on Windows. For more information, please visit <http://www.support.hp.com/help/hp-support-assistant>.
4. HP app with Multicamera support for Mini Desktop PC will only be available on 13th processor and beyond.
5. Poly Studio Desktop requires a Windows OS.
6. HP IQ delivery app is preloaded on select HP PCs; it will be automatically updated to the future featured HP IQ application if you have auto updates enabled in Windows or will be available for download from the Microsoft Store. The future featured HP IQ app uses artificial intelligence. Features vary by configuration. For complete details see https://support.hp.com/us-en/document/ish_13696672-13696717-16.
7. HP Client Catalog not preinstalled, however available for download at (<https://www.hp.com/us-en/solutions/client-management-solutions.html>).
8. HP Client Management Script Library (<https://www.hp.com/us-en/solutions/client-management-solutions.html#tab=manageability-tools>).
9. HP Cloud Recovery is available for Z by HP, HP Elite and Pro desktops and laptops PCs with Intel® or AMD processors and requires an open, network connection. Note: You must back up important files, data, photos, videos, etc. before use to avoid loss of data. Detail, please refer to: <https://support.hp.com/us-en/document/c05115630>.
10. HP Connect for Microsoft Endpoint Manager is available from the Azure Market Place for HP Pro, Elite, Z and Point-of-Sale PCs managed with Microsoft Endpoint Manager. Subscription to Microsoft Endpoint Manager required and sold separately. Network connection required.
11. HP Driver Packs not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>.
12. HP Image Assistant not preinstalled, however available for download at (<https://ftp.ext.hp.com/pub/caps-softpaq/cmit/HPIA.html>).
13. HP Manageability Integration Kit can be downloaded from [HP Manageability Integration Kit | HP Client Management Solutions](#).
14. HP Patch Assistant available on select HP PCs with the HP Manageability Kit that are managed through Microsoft System Center Configuration Manager. HP Manageability Integration Kit can be downloaded from [HP Manageability Integration Kit | HP Client Management Solutions](#).
15. Secured-Core PC Enable requires an Intel® vPro®, AMD Ryzen™ Pro processor or Qualcomm® processor with SD850 or higher and requires 8 GB or more system memory. Secured-core PC is enabled from the factory.
16. HP Wolf Security for Business requires Windows 10 or 11 (Pro or Home) or higher, includes various HP security features and is available on HP X, Ultra, Pro, Elite, Engage and Workstation products. See product details for included security features.
17. HP Sure Admin requires HP G8 or newer platforms, Windows 10 or higher, HP BIOS, HP Manageability Kit or KMS Service from <http://www.hp.com/go/clientmanagement> and HP Sure Admin Local Access Authenticator.
18. HP Sure Click requires Windows 10 Pro or higher or Enterprise. See https://bit.ly/2PrLT6A_SureClick for complete details.
19. HP Sure Recover is available on select HP PCs and requires Windows 10 or 11 and an open network connection. You must back up important files, data, photos, videos, etc. before using HP Sure Recover to avoid loss of data. HP Sure Recover Gen6 with Embedded Reimaging is an optional feature on select HP PCs which requires Windows 10 or 11 must be configured at purchase. You must back up important files, data, photos, videos, etc. before use to avoid loss of data.
20. HP Sure Run is available on select HP PCs and requires Windows 10 and higher.
21. HP Sure Sense is available on select HP PCs with Windows 10 Pro, Windows 10 Enterprise, Windows 11 Pro, or Windows 11 Enterprise OS.
22. HP Sure Start is available on select HP PCs and requires Windows 10 and higher.
23. HP Tamper Lock can be Enabled/disabled by customers or IT administrator with administrator authority.
24. Absolute Persistence firmware module is shipped turned off and can only be activated with the purchase a license subscription and full activation of the software agent. License subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. Certain conditions apply. For full details visit: <https://www.absolute.com/about/legal/agreements/absolute/>.
25. HP BIOSphere features may vary depending on the platform and configuration.
26. HP Secure Erase implements the methods outlined in the National Institute of Standards and Technology Special <http://www.hp.com/smart-support>, <http://www.hp.com/smart-support>, <http://www.hp.com/go/clientmanagement>, <http://www8.hp.com/us/en/ads/clientmanagement/overview.html>, <https://support.hp.com/us-en/document/c05115630>, https://bit.ly/2PrLT6A_SureClick<http://www.hp.com/go/clientmanagement>, <https://www.absolute.com/about/legal/agreements/absolute>.

Features

UNIT ENVIRONMENT AND OPERATING CONDITIONS

ENERGY STAR® certified models available

ENERGY STAR® certified. EPEAT registered where applicable. Based on US EPEAT registration according to EPEAT criteria and EPEAT Climate+, status and tier level varies by country. Visit <http://www.epeat.net> for more information.
Low halogen (chassis, all internal components and modules)¹
TAA compliant models available

1. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

UNIT ENVIRONMENT AND OPERATING CONDITIONS

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C) ² Non-operating: -22° to 149° F (-30° to 65° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 5000m Non-operating: 50000ft (15240 m)

2. Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Features

ENVIRONMENTAL & INDUSTRY

HP EliteDesk 8 SFF G2a Desktop PC / HP EliteDesk 8 SFF G2a Next Gen AI PC

Eco-Label Certifications & declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: • IT ECO declaration • US ENERGY STAR® • US Federal Energy Management Program (FEMP) • EPEAT Gold registered and EPEAT Climate+ attained in the United States. See http://www.epeat.net for registration status in your country*. • TCO Certified • China Energy Conservation Program (CECP) • China State Environmental Protection Administration (SEPA) • Taiwan Green Mark • Korea Eco-label • Japan PC Green label • Commission Regulation (EC) No 617/2013 (ErP Lot 3) NOTE*: Based on US registration according to EPEAT criteria and EPEAT Climate+, status and tier level varies by country. Visit http://www.epeat.net for more information.		
Sustainable Impact Specifications	• At least 25% ocean bound plastic-PET Bottle in the fan and 5% ocean bound plastic-PET used in the speaker • 95% recycled plastic used in parts • 20% recycled metal used in parts • At least 60% of the total post-consumer recycled plastic used in the system • 100% Recycled Rare Earth Elements (REE) in speaker • Outside Box and corrugated cushions are 100% sustainably sourced and recyclable • Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable • Bulk packaging available		
System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data for the Desktop model is based on a “Typically Configured Desktop.”		
Energy Consumption (in accordance with US ENERGY STAR® test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	TBD	TBD	TBD
Normal Operation (Long idle)	TBD	TBD	TBD
Sleep	TBD	TBD	TBD
Off	TBD	TBD	TBD
NOTE: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.			
Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	TBD	TBD	TBD
Normal Operation (Long idle)	TBD	TBD	TBD
Sleep	TBD	TBD	TBD
Off	TBD	TBD	TBD

Features

NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Sound Power (L _{WAd} , bels)	Sound Pressure (L _{pAm} , decibels)	
Typically Configured – Idle	TBD	TBD	
Fixed Disk–Random writes	TBD	TBD	
Optical Drive – Sequential reads	TBD	TBD	
Longevity and Upgrading	This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include: Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.		
Additional Information	• This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. • This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. • This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). • This product is registered as EPEAT Gold and has attained EPEAT Climate+ in the US, status and tier level varies by country, see http://www.epeat.net. • Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. • This product is 92.9% recycle-able when properly disposed of at end of life.		
Packaging Materials	External:	PAPER/Corrugated	624 g
		PAPER/Molded Pulp	468 g
	Internal:	PLASTIC/Polyethylene low density - LDPE	28 g
	The plastic packaging material contains at least 30.0% recycled content.		
	The corrugated paper packaging materials contains at least 35.0% recycled content.		
RoHS Compliance	HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam. We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products. We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve. To obtain a copy of the HP RoHS Compliance Statement, see: HP RoHS position statement .		
Material Usage	• This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):		

Features

	• Asbestos • Certain Azo Colorants • Certain Brominated Flame Retardants – may not be used as flame retardants in plastics • Cadmium • Chlorinated Hydrocarbons • Chlorinated Paraffins • Bis(2-Ethylhexyl) phthalate (DEHP) • Benzyl butyl phthalate (BBP) • Dibutyl phthalate (DBP) • Diisobutyl phthalate (DIBP) • Formaldehyde • Halogenated Diphenyl Methanes • Lead carbonates and sulfates • Lead and Lead compounds • Mercuric Oxide Batteries • Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. • Ozone Depleting Substances • Polybrominated Biphenyls (PBBs) • Polybrominated Biphenyl Ethers (PBBEs) • Polybrominated Biphenyl Oxides (PBBOs) • Polychlorinated Biphenyl (PCB) • Polychlorinated Terphenyls (PCT) • Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. • Radioactive Substances • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging Usage	HP follows these guidelines to decrease the environmental impact of product packaging: • Design packaging materials for ease of disassembly. • Maximize the use of post-consumer recycled content materials in packaging materials. • Use readily recyclable packaging materials such as paper and corrugated materials. • Reduce size and weight of packages to improve transportation fuel efficiency. • Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-of-life Management and Recycling	HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. Global Citizenship Report https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06040843 Eco-label certifications HP Sustainable Impact & Documents & Reports HP® Official Site ISO 14001 certificates: https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c04777932

Features

footnotes	1. Percentage of ocean-bound plastic contained in each component varies by product. 2. Recycled plastic content percentage is based on the definition set in EPEAT criteria. 3. 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. 4. Fiber cushions made from 100% recycled wood fiber and organic materials. 5. Plastic cushions are made from >90% recycled plastic.
-----------	--

SERVICE AND SUPPORT

On-site Warranty¹: One-year (1-1-1) limited warranty delivers one year of on-site, next business day² service for parts and labor support. Service offers terms up to 5 years by choosing an optional HP Care Pack. To choose the right level of service for your HP product, visit HP Care Pack Central: <http://www.hp.com/go/cpc>.³

1. Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.
2. On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
3. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit www.hp.com/go/cpc. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

CERTIFICATION AND COMPLIANCE

Energy Efficiency Compliance

ENERGY STAR® certified. EPEAT registered where applicable. EPEAT registration varies by country. See <http://www.epeat.net> for registration status by country.

PROCESSORS

AMD® Ryzen™ AI 400 Series Processors
Architecture: “Zen 5”
Process Node: 4nm
AMD® Integrated Manageability Technology (AIM-T) – Dependent on WLAN vendor
Memory Access Protection
AMD® Memory Guard – PRO SKU only

AMD® Ryzen™ 8000 Series Processors
Architecture: “Zen 4”
Process Node: 4nm
AMD® Integrated Manageability Technology (AIM-T) – Dependent on WLAN vendor
Memory Access Protection
AMD® Memory Guard – PRO SKU only

.

Technical Specifications – Storage

GRAPHICS

AMD® HD Graphics (integrated)
DisplayPort™

Multimode capable; supports HDCP, Display Port Audio), Onboard support HBR2 link rates/option DP support to HBR2 and Multi-Stream Technology for a maximum of 3-displays connected to any output controlled by AMD® Graphics
Supports HDMI 2.1 features (onboard HDMI support HDMI 2.1 FRL8; Option HDMI support HDMI 2.1 TMDS)
Supports HDCP 2.3 (Support HDCP 1.4/2.3)
Supports audio over HDMI
VGA output
DisplayPort™ over the optional USB-C® module (Support DP1.4 HBR3)
VP9
H.264
H.265 decode with 8bit and 10bit depth and up to 4K@24, 30 and 60 FPS video at Vmin. 32b HDR Format (999e5).
DX12.
2048 x 1536@60Hz
FRL8: 7680 x 4320@59Hz
TMDS: 4096 x 2160 @60Hz
HBR2: 3840 x 2160 @60Hz 24bpp
HBR3: 5120 x 2880 @60Hz 24bpp
DP HBR3: 5120 x 2880 @60Hz 24bpp

HDMI (onboard / optional)

VGA (optional)
USB-C® DP Alt Mode (optional)
Graphics/Video API Support

Max. Resolution (VGA Option)
Max. Resolution (Onboard HDMI)
Max. Resolution (Option HDMI)
Max. Resolution (On board DP)
Max. Resolution (Option DP)
Max. Resolution (Option Type C)

NVIDIA® A400 4GB GDDR6 Graphics card

GPU Clocks Base: 1417 Mhz Boost: 1762 Mhz
Memory size / Bus Width 4GB / 64 bits
Graphic Memory Type / Clock 4GB GDDR6/6001MHz
Max. Resolution (DP1.4a) 7680 x 4320 x24 bpp @120Hz/60Hz
Multi Display Support 4 displays
HDCP Compliance Yes
Rear I/O connectors (bracket) mDPx4
Cooling (active/passive) Active
Total power consumption (W) 50W
Form Factor H: 2.7"(68.58mm) x L: 6.4"(162.56mm), single slot

NVIDIA® RTX A1000 8GB Graphics

GPU Clocks Base: 721 Mhz Boost: 1462 Mhz
Memory size / Bus Width 8GB / 128bits
Graphic Memory Type / Clock 8GB GDDR6/6001MHz
Max. Resolution (DP1.4a) 7680 x 4320 x24 bpp @120Hz/60Hz
Multi Display Support 4 displays
HDCP Compliance Yes
Rear I/O connectors (bracket) mDPx4
Cooling (active/passive) Active
Total power consumption (W) 50W
Form Factor H: 2.7"(68.58mm) x L: 6.4"(162.56mm), single slot

STORAGE

NOTE: Starting November 1, 2023, HP PCs with Windows require Windows to be installed on SSD. HDD can only be configured as additional data drives and not as the boot drive.

1TB 7200RPM 3.5in SATA HDD

Capacity	1TB
Rotational Speed	7,200 rpm
Interface	SATA 6 Gb/s
Buffer Size	64 MB
Logical Blocks	1,953,525,168
Seek Time	11 ms (Average)
Height	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

2TB 7200RPM 3.5in SATA HDD

Capacity	2TB
Rotational Speed	7,200 rpm
Interface	SATA 6 Gb/s
Buffer Size	128 MB
Logical Blocks	3,907,050,336
Seek Time	11 ms (Average)
Height	1.028 in/26.11 mm
Width (nominal)	Media diameter: 3.5 in/88.9 mm Physical size: 4 in/102 mm
Operating Temperature	41° to 131° F (5° to 55° C)

256GB M.2 2280 PCIe NVMe SSD

Capacity	256GB
Interface	PCIe NVMe
Minimum Sequential Read	2500 MB/s $\pm$ 20%
Minimum Sequential Write	1200 MB/s $\pm$ 20%
Logical Blocks	500,118,192
Features	TRIM; L1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32GB (for Windows) is reserved for system recovery software.

Technical Specifications – Storage

512GB M.2 2280 PCIe NVMe SSD

Capacity	512GB
Interface	PCIe NVMe
Minimum Sequential Read	3500 MB/s $\pm 20\%$
Minimum Sequential Write	1600 MB/s $\pm 20\%$
Logical Blocks	1,000,215,216
Features	TRIM; L1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32GB (for Windows) is reserved for system recovery software.

1TB M.2 2280 PCIe NVMe SSD

Capacity	1TB
Interface	PCIe NVMe
Minimum Sequential Read	3500 MB/s $\pm 20\%$
Minimum Sequential Write	2700 MB/s $\pm 20\%$
Logical Blocks	2,000,409,264
Features	TRIM; L1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32GB (for Windows) is reserved for system recovery software.

512GB M.2 2280 PCIe Gen5 NVMe SSD

Capacity	512GB
Interface	PCIe Gen5 NVMe
Minimum Sequential Read	7000 MB/s $\pm 20\%$
Minimum Sequential Write	6000 MB/s $\pm 20\%$
Logical Blocks	1,000,215,216
Features	TRIM; L1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32GB (for Windows) is reserved for system recovery software.

1TB M.2 2280 PCIe Gen5 NVMe SSD

Capacity	1TB
Interface	PCIe Gen5 NVMe
Minimum Sequential Read	7000 MB/s $\pm 20\%$
Minimum Sequential Write	6600 MB/s $\pm 20\%$
Logical Blocks	2,000,409,264
Features	TRIM; L1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32GB (for Windows) is reserved for system recovery software.

Technical Specifications – Storage

2TB M.2 2280 PCIe Gen5 NVMe SSD

Capacity	2TB
Interface	PCIe Gen5 NVMe
Minimum Sequential Read	7000 MB/s ±20%
Minimum Sequential Write	6800 MB/s ±20%
Logical Blocks	2,000,767,360
Features	TRIM; L1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32GB (for Windows) is reserved for system recovery software.

512GB M.2 2280 PCIe Gen5 Self Encrypted OPAL2 Value SSD

Capacity	512GB
Interface	PCIe Gen5 NVMe
Minimum Sequential Read	7000 MB/s ±20%
Minimum Sequential Write	6000 MB/s ±20%
Logical Blocks	1000,118,192
Features	TCG Opal 2.0; TRIM; L1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32GB (for Windows) is reserved for system recovery software.

256GB M.2 2280 PCIe NVMe Self Encrypted OPAL2 Value SSD

Capacity	256GB
Interface	PCIe NVMe
Minimum Sequential Read	2500 MB/s ±20%
Minimum Sequential Write	1200 MB/s ±20%
Logical Blocks	500,118,192
Features	TCG Opal 2.0; TRIM; L1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32GB (for Windows) is reserved for system recovery software.

OPTICAL DISC DRIVES

HP 9.5mm Slim DVD-ROM Drive

Height	9.5 mm height
Orientation	Either horizontal or vertical
Interface type	SATA/ATAPI
Dimensions (W x H x D)	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
Weight (max)	Up to 0.31 lb (140g) without bezel
Read Speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL Up to 8X DVD-ROM Up to 8X CD-ROM, CD-R Up to 24X CD-RW Up to 24X
Access time (typical reads, including settling)	Random: DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full stroke: DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
Power	Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)
Environmental conditions (operating - non-condensing)	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)

Technical Specifications – Storage

HP 9.5mm Slim DVD Writer Drive

Height	9.5 mm height
Orientation	Either horizontal or vertical
Interface type	SATA/ATAPI
Disc recording capacity	Up to 8.5 GB DL or 4.7 GB standard
Dimensions (W x H x D)	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
Weight (max)	0.31 lb (140 g)
Write Speeds	DVD-R DL - Up to 6X DVD+R - Up to 8X DVD+RW - Up to 8X DVD+R DL - Up to 6X DVD-R - Up to 8X DVD-RW - Up to 6X CD-R - Up to 24X CD-RW - Up to 10X DVD-RW, DVD+RW - Up to 8X
Read Speeds	DVD-R DL, DVD+R DL - Up to 8X DVD+R, DVD-R - Up to 8X DVD-ROM DL, DVD-ROM - Up to 8X CD-ROM, CD-R - Up to 24X CD-RW - Up to 24X
Access time (typical reads, including settling)	Random DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full Stroke DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) Stop Time 6 seconds (typical)
Power	Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)
Environmental conditions (operating - non-condensing)	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)



NETWORKING AND COMMUNICATIONS

Realtek RTK8111EPP 10/100/1000 Integrated NIC	
Connector	RJ-45
System Interface	PCIe + SMBus + USB2
Data rates supported	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
IEEE Compliance	IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) IEEE802.3 compatible Media Access Controller (MAC)
Performance	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload v1&v2 and Giant send offload Receiving Side Scaling Jumbo Frame 9K
Power consumption	Cable Disconnection: 25mW 100Mbps Full Run: 450mW 1000Mbps Full Run: 1000mW WoL Enable(S3/S4/S5): 50mW WoL Disable(S3/S4/S5): 25mW
Power Management	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
Management Interface	Auto MDI/MDIX Crossover cable detection
IT Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))
Security & Manageability	Support DASH 1.4 compliant/Software KVM ASF 2.0

MediaTek MT7925 Wi-Fi7 + Bluetooth® 6.0 wireless card (802.11be 2x2)^{1,2}	
Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11be IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v IEEE 802.11w
Interoperability	Wi-Fi certified
Frequency Band	802.11b/g/n/ax/be • 2.402 – 2.482 GHz 802.11a/n/ac/ax/be • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz • 5.955 – 6.415 GHz • 6.435 – 6.515 GHz • 6.535 – 6.875 GHz • 6.895 – 7.115 GHz
Data Rates	• 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: max 300Mbps • 802.11ac: 1733Mbps • 802.11ax: max 2.4Gbps • 802.11be: max 2.8Gbps (160MHz)
Modulation	Direct Sequence Spread Spectrum OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM, 4096QAM
Security	• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 certification • IEEE 802.11i • WAPI
Network Architecture Models	Ad-hoc (Peer to Peer)

Technical Specifications – Networking

	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power	• 802.11b, 1Mbps: +17dBm minimum • 802.11g, 6Mbps: +16dBm minimum • 802.11a, 6Mbps: +17dBm minimum • 802.11n, MCS7(HT20): +14dBm minimum • 802.11n, MCS7(HT40): +13.5dBm minimum • 802.11ac MCS9(VHT20): 13.5dBm minimum • 802.11ac MCS9(VHT40): +13.5dBm minimum • 802.11ac MCS9(VHT80): +12.5dBm minimum • 802.11ac MCS9(VHT160): +10.5dBm minimum • 802.11ax MCS11(HE20) (6GHz): +11.5dBm minimum • 802.11ax MCS11(HE40) (6GHz): +7.5dBm minimum • 802.11ax MCS11(HE80) (6GHz): +7.5dBm minimum • 802.11ax MCS11(HE160) (6GHz): +7.5dBm minimum • 802.11be MCS13(EHT20) (6GHz): +11.5dBm • 802.11be MCS13(EHT40) (6GHz): +7.5dBm • 802.11be MCS13(EHT80) (6GHz): +7.5dBm • 802.11be MCS13(EHT160) (6GHz): +6.5dBm
Power Consumption	• Transmit mode 2.7 W • Receive mode 1.8 W • Idle mode (PSP) 180 mW (WLAN Associated) • Idle mode 50 mW (WLAN unassociated) • Connected Standby 10mW • Radio disabled 8 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity	• 802.11b, 1Mbps: -93.5dBm maximum • 802.11b, 11Mbps: -85dBm maximum • 802.11a/g, 6Mbps: -90.5dBm maximum • 802.11a/g, 54Mbps: -72.5dBm maximum • 802.11n, MCS0(HT20): -90dBm maximum • 802.11n, MCS7(HT20): -71.5dBm maximum • 802.11n, MCS0(HT40): -88.5dBm maximum • 802.11n, MCS7(HT40): -68.5dBm maximum • 802.11ac, MCS9(VHT20): -88.5dBm maximum • 802.11ac, MCS9(VHT40): -65.5dBm maximum • 802.11ac, MCS9(VHT80): -60.5dBm maximum • 802.11ac, MCS9(VHT160): -58.5dBm maximum • 802.11ax, MCS11(HE20) (6GHz): -59.5dBm maximum • 802.11ax, MCS11(HE40) (6GHz): -56.5dBm maximum • 802.11ax, MCS11(HE80) (6GHz): -53.5dBm maximum • 802.11ax, MCS11(HE160) (6GHz): -51.5dBm maximum • 802.11be, MCS13(EHT20) (6GHz): -55.5dBm maximum • 802.11be, MCS13(EHT40) (6GHz): -53.5dBm maximum • 802.11be, MCS13(EHT80) (6GHz): -51.5dBm maximum • 802.11be, MCS13(EHT160) (6GHz): -48.5dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications

Technical Specifications – Networking

Form Factor	PCI-Express M.2 MiniCard
Dimensions	1. Type 2230: 2.3 x 22.0 x 30.0 mm
Weight	1. Type 2230: 2.8g
Operating Voltage	3.3v +/- 9%
Temperature	Operating: 14° to 158° F (–10° to 70° C) Non-operating: –40° to 176° F (–40° to 80° C)
Humidity	Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing)
Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED OFF – Radio ON
HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4/6.0 Wireless Card Technology	
Bluetooth Specification	4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4/6.0 Wireless Card Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class I Bluetooth device with a maximum transmit power of +15.5 dBm for BR and +13dBm for EDR.
Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth® Software Supported Link Topology	Microsoft Windows Bluetooth Software Linux/Chrome OS Bluetooth Software.
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950UL, CSA, and CE Mark

Technical Specifications – Networking

Bluetooth® Profiles Supported	Bluetooth 4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan Bluetooth 4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Bluetooth 5.2 ESR9/10 Compliance LE Advertisement Extensions Channel Selection Algo Limited High Duty Cycle Non-Connectable Advertising 2Mbps LE LE Long Range Bluetooth 5.3 Host to Controller Encryption Key Control Enhancements Compliance to the latest Errata Section 12.3 of BT 5.3 specification Bluetooth 5.4 Bluetooth 6.0
--------------------------------------	---

1. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 7 (802.11BE) functionality requires compatible Windows 11 OS, compatible processor, and separately purchased Wi-Fi 7 router to support backwards compatibility with prior 802.11 specs. Available in countries where Wi-Fi 7 is supported. The specification for 802.11BE is a draft specification and is not final. If the final specification differs from the draft specification, it may affect the ability of the device to communicate with other 802.11BE devices.

2. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Intel I226-T1 2.5GbE Ethernet Network Adapter	
Connector	RJ-45
System Interface	PCI (Intel proprietary) + SMBus
Data rates supported	1. 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 2. 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 3. 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) 4. 2.5 Gbit/s operation (2.5GBASE-T; IEEE 802.3bz Clause 126) 5. Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 & 100 Mbit/s
IEEE Compliance	IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5GBASE-T
Performance	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling (Hash Mode Only) Jumbo Frame 9K
Power consumption	Cable Disconnection: 25mW 100Mbps Full Run: 450mW 1000Mbps Full Run: 1000mW 2500Mbps Full Run: 4500mW WoL Enable(S3/S4/S5): 50mW WoL Disable(S3/S4/S5): 25mW
Power	ACPI compliant – multiple power modes
Management	Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
Management Interface	Auto MDI/MDIX Crossover cable detection
IT Manageability	Wake-on-LAN from modern standby or sleep state (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status

Technical Specifications – Networking

MediaTek MT7925 Wi-Fi7 + Bluetooth® 6.0 wireless card (802.11be 2x2)¹	
Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11be IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v
Interoperability	Wi-Fi certified
Frequency Band	802.11b/g/n/ax/be • 2.402 – 2.482 GHz 802.11a/n/ac/ax/be • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz • 5.955 – 6.415 GHz • 6.435 – 6.515 GHz • 6.535 – 6.875 GHz • 6.895 – 7.115 GHz
Data Rates	• 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: max 300Mbps • 802.11ac: 1733Mbps • 802.11ax: max 2.4Gbps • 802.11be: max 2.8Gbps (160MHz)
Modulation	Direct Sequence Spread Spectrum OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM, 4096QAM
Security	• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 certification • IEEE 802.11i • WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)

Technical Specifications – Networking

Roaming	IEEE 802.11 compliant roaming between access points
Output Power	• 802.11b, 1Mbps: +17dBm minimum • 802.11g, 6Mbps: +16dBm minimum • 802.11a, 6Mbps: +17dBm minimum • 802.11n, MCS7(HT20): +14dBm minimum • 802.11n, MCS7(HT40): +13.5dBm minimum • 802.11ac MCS9(VHT20): 13.5dBm minimum • 802.11ac MCS9(VHT40): +13.5dBm minimum • 802.11ac MCS9(VHT80): +12.5dBm minimum • 802.11ac MCS9(VHT160): +10.5dBm minimum • 802.11ax MCS11(HE20) (6GHz): +11.5dBm minimum • 802.11ax MCS11(HE40) (6GHz): +7.5dBm minimum • 802.11ax MCS11(HE80) (6GHz): +7.5dBm minimum • 802.11ax MCS11(HE160) (6GHz): +7.5dBm minimum • 802.11be MCS13(EHT20) (6GHz): +11.5dBm • 802.11be MCS13(EHT40) (6GHz): +7.5dBm • 802.11be MCS13(EHT80) (6GHz): +7.5dBm • 802.11be MCS13(EHT160) (6GHz): +6.5dBm
Power Consumption	• Transmit mode 2.7 W • Receive mode 1.8 W • Idle mode (PSP) 180 mW (WLAN Associated) • Idle mode 50 mW (WLAN unassociated) • Connected Standby 10mW • Radio disabled 8 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity²	• 802.11b, 1Mbps: -93.5dBm maximum • 802.11b, 11Mbps: -85dBm maximum • 802.11a/g, 6Mbps: -90.5dBm maximum • 802.11a/g, 54Mbps: -72.5dBm maximum • 802.11n, MCS0(HT20): -90dBm maximum • 802.11n, MCS7(HT20): -71.5dBm maximum • 802.11n, MCS0(HT40): -88.5dBm maximum • 802.11n, MCS7(HT40): -68.5dBm maximum • 802.11ac, MCS9(VHT20): -88.5dBm maximum • 802.11ac, MCS9(VHT40): -65.5dBm maximum • 802.11ac, MCS9(VHT80): -60.5dBm maximum • 802.11ac, MCS9(VHT160): -58.5dBm maximum • 802.11ax, MCS11(HE20) (6GHz): -59.5dBm maximum • 802.11ax, MCS11(HE40) (6GHz): -56.5dBm maximum • 802.11ax, MCS11(HE80) (6GHz): -53.5dBm maximum • 802.11ax, MCS11(HE160) (6GHz): -51.5dBm maximum • 802.11be, MCS13(EHT20) (6GHz): -55.5dBm maximum • 802.11be, MCS13(EHT40) (6GHz): -53.5dBm maximum • 802.11be, MCS13(EHT80) (6GHz): -51.5dBm maximum • 802.11be, MCS13(EHT160) (6GHz): -48.5dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications

Technical Specifications – Networking

Form Factor	PCI-Express M.2 MiniCard
Dimensions	1. Type 2230: 2.3 x 22.0 x 30.0 mm
Weight	1. Type 2230: 2.8g
Operating Voltage	3.3v +/- 9%
Temperature	Operating: 14° to 158° F (–10° to 70° C) Non-operating: –40° to 176° F (–40° to 80° C)
Humidity	Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing)
Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED OFF – Radio ON
HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4/6.0 Wireless Card Technology	
Bluetooth Specification	4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4/6.0 Wireless Card Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class I Bluetooth device with a maximum transmit power of +15.5 dBm for BR and +13dBm for EDR.
Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth Software Supported Link Topology	1. Microsoft Windows Bluetooth Software 2. Linux/Chrome OS Bluetooth Software.
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950UL, CSA, and CE Mark

Technical Specifications – Networking

Bluetooth Profiles Supported	Bluetooth 4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan Bluetooth 4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Bluetooth 5.2 ESR9/10 Compliance LE Advertisement Extensions Channel Selection Algo Limited High Duty Cycle Non-Connectable Advertising 2Mbps LE LE Long Range Bluetooth 5.3 Host to Controller Encryption Key Control Enhancements Compliance to the latest Errata Section 12.3 of Bluetooth 5.3 specification Bluetooth 5.4 Bluetooth 6.0
------------------------------	--

1. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 7 (802.11BE) functionality requires compatible Windows 11 OS, compatible processor, and separately purchased Wi-Fi 7 router to support backwards compatibility with prior 802.11 specs. Available in countries where Wi-Fi 7 is supported. The specification for 802.11BE is a draft specification and is not final. If the final specification differs from the draft specification, it may affect the ability of the device to communicate with other 802.11BE devices.

2. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Technical Specifications – Networking

MediaTek RZ616 Wi-Fi 6E + Bluetooth® 5.3 wireless card (802.11ax 2x2, AMD AIM-T)^{1,2}	
Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11j IEEE 802.11k IEEE 802.11mc IEEE 802.11r IEEE 802.11v IEEE 802.11w
Interoperability	Wi-Fi certified
Frequency Band	802.11b/g/n/ax • 2.402 – 2.482 GHz 802.11a/n/ac/ax • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz • 5.925 – 7.125 GHz
Data Rates	• 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac: MCS0 ~ MCS9, (20MHz, 40MHz, ,80MHz & 160MHz) • 802.11ax: MCS0 ~ MCS11, (20MHz, 40MHz, ,80MHz & 160MHz)
Modulation	Direct Sequence Spread Spectrum OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM
Security	• IEEE and WiFi certified 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 (personal) certification • IEEE 802.11i • WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)

Technical Specifications – Networking

Roaming	IEEE 802.11 compliant roaming between access points
	2.4GHz (MIMO, typical): • 802.11b: +18dBm • 802.11g: +16.5dBm • 802.11n/ac/ax (HT20/VHT20/HE20): +16dBm • 802.11n/ac/ax (HT40/VHT40/HE40): +12.5dBm 5GHz (MIMO, typical): • 802.11a: +13dBm • 802.11n/ac/ax (HT20/VHT20/HE20): +13.5dBm • 802.11n/ac/ax (HT40/VHT40/HE40): +12.5dBm • 802.11ac/ax (VHT80/HE80): +11.5dBm • 802.11ax HE160: +11.5dBm
Output Power	6GHz LPI mode (MIMO, typical):: • 802.11a: 0dBm • 802.11ax HE20: +1dBm • 802.11ax HE40: +4dBm • 802.11ax HE80: +7dBm • 802.11ax HE160: +7.5dBm
Power Consumption	• Transmit mode: 2.5 W • Receive mode: 2 W • Idle mode (PSP) 180 mW (WLAN Associated) • Idle mode: 50 mW (WLAN unassociated) • Connected Standby/Modern Standby: 10mW • Radio disabled: 8 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	2.4GHz (SISO): • 802.11b, 11Mbps: -82dBm maximum • 802.11g, 54Mbps: -71dBm maximum • 802.11n, MCS7: -64dBm maximum • 802.11ac, MCS9: -52dBm maximum • 802.11ax, MCS11(HT40): -49dBm maximum 5GHz (SISO): • 802.11a, 54Mbps: -71dBm maximum • 802.11n, MCS07: -64dBm maximum • 802.11ac, MCS9: -52dBm maximum • 802.11ax, MCS11(HE80/HE160): -46dBm maximum 6GHz (SISO): • 802.11a, 54Mbps: -71dBm maximum • 802.11n, MCS7: -64dBm maximum • 802.11ac, MCS9: -52dBm maximum • 802.11ax, MCS11(HE160): -46dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5/6 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard
Dimensions	1. Type 2230: 2.3 x 22.0 x 30.0 mm
Weight	1. Type 2230: 2.8g

Technical Specifications – Networking

Operating Voltage	3.3v +/- 9%
Temperature	Operating: 14° to 158° F (–10° to 70° C) Non-operating: –40° to 176° F (–40° to 80° C)
Humidity	Operating: 10% to 60% (non-condensing) Non-operating: 5% to 95% (non-condensing)
Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3 Wireless Card Technology	
Bluetooth Specification	4.0/4.1/4.2/5.0/5.1/5.2/5.3 Wireless Card Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class 1.5 Bluetooth device with a maximum transmit power of + 14 dBm and 10 dBm for BR and EDR, respectively.
Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth Software Supported Link Topology	Microsoft Windows Bluetooth Software
Power Management	Microsoft Windows ACPI, and USB Bus Support
Certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.407 ETS 300 328 Low Voltage Directive CE Mark

Technical Specifications – Networking

Bluetooth Profiles Supported	Bluetooth 4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan Bluetooth 4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Bluetooth 5.2 ESR9/10 Compliance LE Advertisement Extensions Channel Selection Algo Limited High Duty Cycle Non-Connectable Advertising 2Mbps LE LE Long Range Windows BT profiles support Bluetooth 5.3 Periodic Advertisement interval Encryption key size control enhancements
------------------------------	---

- 1. Wi-Fi 6E requires a Wi-Fi 6E router, sold separately to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 6E is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported.
- 2. Wi-Fi 6E is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately.
- 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).



Realtek RTL8852BE 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.4 Wireless Card (802.11ax 2x2, supporting gigabit data rate)^{1,2}	
Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v IEEE 802.11w
Interoperability	Wi-Fi® certified modules
Frequency Band	802.11b/g/n/ax • 2.402 – 2.482 GHz 802.11a/n/ac/ax • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz
Data Rates	• 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: max 300Mbps • 802.11ac: max 866.7Mbps • 802.11ax: max 1201Mbps
Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM
Security²	• IEEE and Wi-Fi® certified 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 certification • IEEE 802.11i • WAPI (by request) • EAP
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power³	802.11b: +20dBm 802.11g: +18dBm 802.11a: +18dBm 802.11n HT20(2.4GHz): +17dBm 802.11n HT40(2.4GHz): +17dBm 802.11n HT20(5GHz): +17dBm 802.11n HT40(5GHz): +17dBm

Technical Specifications – Networking and Communications

	802.11ac VHT80(5GHz): +15dBm 802.11ax HE40(2.4GHz): +13dBm 802.11ax HE80(5GHz): +13dBm
Power Consumption	• Transmit mode: 3.1 W • Receive mode: 1.8 W • Idle mode (PSP): 180 mW (WLAN Associated) • Idle mode: 50 mW (WLAN unassociated) • Connected Standby/Modern Standby: 10mW • Radio disabled: 8 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	• 802.11b, 1Mbps: -93.5dBm maximum • 802.11b, 11Mbps: -85dBm maximum • 802.11a/g, 6Mbps: -90.5dBm maximum • 802.11a/g, 54Mbps: -72.5dBm maximum • 802.11n, MCS0(HT20): -90dBm maximum • 802.11n, MCS7(HT20): -71.5dBm maximum • 802.11n, MCS0(HT40): -88.5dBm maximum • 802.11n, MCS7(HT40): -68.5dBm maximum • 802.11ac, MCS9(VHT20): -88.5dBm maximum • 802.11ac, MCS9(VHT40): -65.5dBm maximum • 802.11ac, MCS9(VHT80): -60.5dBm maximum • 802.11ac, MCS9(VHT160): -58.5dBm maximum • 802.11ax, MCS11(HE20) (6GHz): -59.5dBm maximum • 802.11ax, MCS11(HE40) (6GHz): -56.5dBm maximum • 802.11ax, MCS11(HE80) (6GHz): -53.5dBm maximum • 802.11ax, MCS11(HE160) (6GHz): -51.5dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard
Dimensions	1. Type 2230: 2.3 x 22.0 x 30.0 mm
Weight	1. Type 2230: 2.8g
Operating Voltage	3.3v +/- 9%
Temperature	Operating: 14° to 158° F (–10° to 70° C) Non-operating: –40° to 176° F (–40° to 80° C)
Humidity	Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing)
Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED OFF – Radio ON
HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4 Wireless Card Technology	
Bluetooth® Specification	4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4 Wireless Card Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)

Technical Specifications – Networking and Communications

Data Rates and Throughput	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class I Bluetooth device with a maximum transmit power of +15.5 dBm for BR and +13dBm for EDR.
Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth® Software Supported Link Topology	Microsoft Windows Bluetooth Software
Power Management	Microsoft Windows ACPI, and USB Bus Support
Certifications	FCC (47 CFR) Part 15C/E, Section 15.247, 15.249ETSI 300 328, ETSI 301 893
Bluetooth® Profiles Supported	Bluetooth 4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan Bluetooth 4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Bluetooth 5.2 ESR9/10 Compliance LE Advertisement Extensions Channel Selection Algo Limited High Duty Cycle Non-Connectable Advertising 2Mbps LE LE Long Range Windows BT profiles support Bluetooth 5.3 Compliance to the latest errata spetipn 12.3 of bluetooth 5.3 specification ESR 9/10 compliance Host to controller Encryption key control enhancements

1. Wi-Fi 6 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 (802.11ax) is backwards compatible with prior 802.11 specs.
2. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

I/O DEVICES

HP 175K wired Keyboard		
Physical Characteristics	Keys	110keys (US);111(UK);113(JP, BR)
	Dimensions (LxWxH)	428.83x117.37x19.1 (mm) ;16.88 × 4.62 × 0.75 (in)
	Weight	435 (g) ;0.96 (lb)
Electrical	Operating voltage	4.75~5.25V
	Power consumption	100mA
	System Interface	USB
	ESD	Contact Discharge: 8 KV Air Discharge: 15 KV
	Cable length	6 ft (1.8 M)
	EMI - RFI	Conforms to FCC rules for a Class B computing device
Mechanical	Key Structure (Switch type and feeling) (Plunger)	Plunger, Key travel: 2.5mm +/-0.2mm at 120gf, low profile key travel
	Key actuation	60±8g nominal peak force with tactile feedback
	Key life	10 million keystrokes (Life tester)
Environmental	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-32° to 140° F (-40° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Drop (out of box)	6 faces, 76cm, rigid surface
	Drop (in box)	6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm
Approvals	UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC, EAC, BIS	

HP 175k Antimicrobial wired Keyboard		
Physical Characteristics	Keys	110keys (US);111(UK);113(JP, BR)
	Dimensions (LxWxH)	428.83x117.37x19.1 (mm) ;16.88 × 4.62 × 0.75 (in)
	Weight	435 (g) ;0.96 (lb)
Electrical	Operating voltage	4.75~5.25V
	Power consumption	100mA
	System Interface	USB
	ESD	Contact Discharge: 8 KV Air Discharge: 15 KV
	Cable length	6 ft (1.8 M)
	EMI - RFI	Conforms to FCC rules for a Class B computing device
Mechanical	Key Structure (Switch type and feeling) (Plunger)	Plunger, Key travel: 2.5mm +/-0.2mm at 120gf, low profile key travel
	Key actuation	60±8g nominal peak force with tactile feedback
	Key life	10 million keystrokes (Life tester)
Environmental	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-32° to 140° F (-40° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Drop (out of box)	6 faces, 76cm ,rigid surface
	Drop (in box)	6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm
Approvals	UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC, EAC, BIS	

Technical Specifications – Input/Output Devices

HP 175M wired Mouse		
Dimensions (LxWxH)	123x65x39 (mm); 4.84x2.56x1.54 (in)	
Weight	80 (g);0.18 (lb)	
Environmental	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-32° to 140° F (-40° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Drop (out of box)	6 faces, 76cm, rigid surface
	Drop (in box)	6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm
Electrical	Operating voltage	4.75~5.25V
	Power consumption (typical)	100mA
	Resolution	1,200 DPI
	Sensor	Optical USB mouse sensor
	System Interface	USB
	Cable length	6 ft (1.8 M)
Regulatory approvals	Compliant	UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC, EAC

HP 175M Antimicrobial wired Mouse		
Dimensions (LxWxH)	123x65x39 (mm); 4.84x2.56x1.54 (in)	
Weight	80 (g);0.18 (lb)	
Environmental	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-32° to 140° F (-40° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Drop (out of box)	6 faces, 76cm, rigid surface
	Drop (in box)	6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm
Electrical	Operating voltage	4.75~5.25V
	Power consumption (typical)	100mA
	Resolution	1,200 DPI
	Sensor	Optical USB mouse sensor
	System Interface	USB
	Cable length	6 ft (1.8 M)
Regulatory approvals	Compliant	UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC, EAC

Technical Specifications – Input/Output Devices

HP 275 wireless Keyboard		
Physical Characteristics	Keys	107keys (US); 108keys (UK); 110 keys (JP, BR)
	Dimensions (LxWxH)	428.83*117.37*19.1 (mm) ;16.88 × 4.62 × 0.75 (in)
	Weight	416 (g) ;0.92 (lb)
Electrical	Operating voltage	2.2V~3.3V(BATTERY)
	Power consumption	30mA
	System Interface	2.4GHz Wireless
	ESD	Contact Discharge: 8 KV Air Discharge: 15 KV
	EMI - RFI	Conforms to FCC rules for a Class B computing device
Mechanical	Key Structure (Switch type and feeling) (Plunger)	Plunger, Key travel: 2.5mm +/-0.2mm at 120gf, low profile key travel
	Key actuation	60±8g nominal peak force with tactile feedback
	Key life	10 million keystrokes (Life tester)
Environmental	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-32° to 140° F (-40° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Drop (out of box)	6 faces, 76cm, rigid surface
	Drop (in box)	6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm
Approvals	CB; FCC; IC;UL; ENCOM; ANATEL; SUBTEL; RCM; WPC; BIS; CONATEL; TRA; CE; TUV GS; ICASA; SRRC; DJID; TELEC; VCCI; KCC; SIRIM; NTC; IMDA; NCC; BSMI; NBTC.	

HP 275M wireless Mouse		
Dimensions (LxWxH)	123x65x39 (mm); 4.84x2.56x1.54 (in)	
Weight	73 (g);0.161 (lb) (no Battery)	
Environmental	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-32° to 140° F (-40° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Drop (out of box)	6 faces, 76cm, rigid surface
	Drop (in box)	6 faces, 1 corner and 3 edges on rigid surface, drop Height: 91cm
Electrical	Operating voltage	1.5VDC
	Power consumption (typical)	30mA
	Resolution	1,200 DPI
	Sensor	Optical mouse sensor
	System Interface	2.4GHz Wireless
	Cable length	NA
Regulatory approvals	Compliant	CB; FCC; IC; UL; ENCOM; ANATEL; SUBTEL; RCM; WPC; CONATEL; TRA; CE; TUV GS; ICASA; SRRC; DJID; TELEC; VCCI; KCC; SIRIM; NTC; IMDA; NCC; BSMI; NBTC

AUDIO/MULTIMEDIA

Type	Integrated
HD Stereo Codec	Realtek ALC 3252
Audio I/O Ports	Front: Headset connector supports a CTIA and OMTP style headset and Rear Line Out (w/ Line In Retasking), Microphone-in or Headphone-out port Rear: Line-out, Line-in*, 3.5mm and support stereo and retasking
Internal Speaker Amplifier	2W class D mono amplifier for the internal speaker only. External speakers must be powered
Multi-streaming Capable	Playback multi-streaming can be enabled in the audio control panel to allow independent audio streams to be sent to/from the front and rear jacks or integrated speaker.
Sampling	Independent sampling rates for DAC's and ADC's; supports resolutions from 16 to 24-bit; 44.1 kHz to 192 kHz for DAC and 44.1 kHz to 96 kHz for ADC
Wavetable Syntheses	Yes – Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out	Stereo (Left & Right channels)
Internal Speaker	Yes

***NOTE:** System default is line-out. Line-in / Line-out can be adjusted through the audio setting

POWER

Unit Environment and Operating Conditions

Temperature Range	Operating: 5°C ~ 50°C Non-Operating: -40°C ~66°C
Relative Humidity	Operating 5% to 90% relative humidity at max inlet temperature Non-Operating 5% to 95% relative humidity at max inlet temperature
Maximum Altitude (unpressurized)	Operating: 5000m Non-operating: 50,000 ft. (15240 m)

Internal Power Supplies	180W active PFC / 80 PLUS Gold Gold 87/90/92% efficient at 20/50/100% load (115V) 90/92/89% efficient at 20/50/100% load (230V)280W active PFC / 80 PLUS Platinum Platinum 90/92/89% efficient at 20/50/100% load (115V) 91/93/90% efficient at 20/50/100% load (230V)
Operating Voltage Range	90Vac~264Vac
Rated Voltage Range	100Vac~240Vac
Rated Line Frequency	50HZ~60HZ
Operating Line Frequency	47HZ~63HZ
Rated Input Current with Energy Efficient* Power Supply	180W Gold $\leq 2.3A$ 260W Platinum $\leq 3.1A$
DC Output	+12V

1. External power supplies, power cords, cables and peripherals are not low halogen. Service parts obtained after purchase may not be low halogen.

Current Leakage (NFPA 99: 2012)	Less patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 264 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1 less than 500 microamps of leakage current at 264 Vac with the ground wire disconnected, as required for Non- patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.
Power Supply Fan	70 mm variable speed
Power cord length	6.0 ft. (1.83 m) ²
External Power Adapter	Internal power
Dimensions	165 x 95 x 73 mm
Total Cord Length	6.0 ft. (1.83 m)

1. Power cord length will be varied from different type of cords start from 1.8m.
2. The length of India power cord is 2.0m

Technical Specifications – Power

AC Adaptor		Eris+ 200W
Dimensions		6.5 x 3.11 x 1.0 in (16.5 x 7.9 x 2.54 cm)
Weight		530 g (+/- 10 g)
Input	Input Efficiency	Average Efficiency of 25%, 50%, 75%, 100% load condition with 115 Vac / 230 Vac Spec: 88% at 115 Vac and 89 % at 230 Vac
	Input Frequency Range	47-63 Hz
	Input AC current	Max. 3.0 A at 90 Vac
Output	Output Power	200W
	DC Output	19.5V
	Hold-up Time	5 ms at 115 Vac input
	Output Over Current Protection	< 21.0A
Leakage Current		Shall not exceed 50uA when tested at 250 Vac/50 Hz in a normal operating condition
AC connector (Ac inlet)		C14
DC Plug		7.4 mm Barrel Type
Environmental Design	Operating Temperature	32°F to 95°F (0° to 35°C)
	Non-operating (storage) Temperature	-4°F to 185°F (-20° to 85°C)
	Altitude	0 to 16,400 ft (0 to 5000 m)
	Humidity	20% to 95%
	Storage Humidity	10% to 95%
EMI and Safety Certifications		*CE Mark - full compliance with LVD and EMC directives * Worldwide safety standards - IEC60950-1 and/or IEC62368-1 2&3 ed, EN60950-1 and/or EN62368-1, UL62368-1 , Class I, SELV; Agency approvals - cULus, CCC, BIS, PSE(J62368), EN55032 Class B, FCC Class B, CISPR32 Class B, CCC, NOM-001 NYCE, EAEU, Australia MTBF - over 100,000 hours at 35°C ambient condition

The power supply shall comply with harmonic input current requirements as detailed in EN61000-3-2 and JEIDA MITI standards. The harmonic input current requirements must be met under the following operating conditions:

Load Requirements: 50% and 100%

Input Voltage: 230Vac/50Hz.

For active power factor correction the power factor at 50% & 100% loads shall be greater than 0.9 over the entire nominal input voltage range (100-127VAC and 200-240VAC).

Condition	Standard Efficiency	82/85/82%	85/88/85%	87/90/87%	90/92/89%	Input Voltage
10% of Rated Load	-	75%	81%	84%	86%	115Vac/60HZ
20% of Rated Load	-	82%	85%	87%	90%	115Vac/60HZ
50% of Rated Load	-	85%	88%	90%	92%	115Vac/60HZ
	PF>0.9	PF>0.9	PF>0.9	PF>0.9	PF>0.95	115Vac/60HZ
100% of Rated Load	70%	82%	85%	87%	89%	115Vac/60HZ
	PF>0.9	PF>0.9	PF>0.9	PF>0.9	PF>0.9	230Vac/50HZ

WEIGHTS & DIMENSIONS

Chassis (WxDxH) 11	11.9x 12.1 x 3.94 in 303.5x 308 x 100 mm
System Volume	570 cu in 9.3L
System Weight	10.3 lb 4.67 kg
Max Supported Weight (desktop orientation)	11.7lb 5.31 kg
Stand Dimensions	151.7x 200 x 38.2.mm
Packaging (WxDxH)	7.87 x 19.65 x 15.51 in 200 x 499 x 394 mm MPP: 7.87 x 19.65 x 15.51 in 200 x 499 x 394 mm
Shipping Weight	13.04 lb (5.92 kg) MPP: 13.74 lb (6.24 kg)
Multipack Packaging	8 units per pack 32 units per pallet 1200 x 1000 x 1327 mm (include the pallet)
Palletization Profile	12 units per layer 6 layers max 72 units per pallet 1200 x 1000 x 2492 mm (include the pallet)

MISCELLANEOUS FEATURES

Management Features

- Advanced Configuration and Power Management interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- IDual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Power LED will blink red 2 to 5 times, then blink white 2 or more times, then repeat (with beep tones for each blink initially):
 - 2 red + 2 white User must provide file for BIOS recovery (USB storage typically)
 - 2 red + 3 white User must enter a key sequence to proceed with recovery by policy
 - 2 red + 4 white BIOS recovery is in progress
 - 3 red + 2 white Memory could not be initialized
 - 3 red + 3 white Graphics adaptor could not be found
 - 3 red + 4 white Power supply failure / not connected
 - 3 red + 5 white Processor not installed
 - 3 red + 6 white Current processor does not support an enabled feature
 - 4 red + 2 white Processor has exceeded its temperature threshold / system thermal shutdown
 - 4 red + 3 white System internal temperature has exceeded its threshold
 - 5 red + 2 white System controller firmware is not valid
 - 5 red + 3 white System controller detected BIOS is not executing
 - 5 red + 4 white BIOS could not complete initialization / PCA failure
 - 5 red + 5 white System controller rebooted the system after a health or recovery timer triggered
- HP PC Hardware Diagnostics UEFI:
 - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support
- System/Emergency ROM
- Flash ROM
- CMOS Battery
- Holder for easy replacement
- 1 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED – To indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy identification

Technical Specifications – Miscellaneous Features

Additional Features	Description
Tower Orientation	Product can be oriented as either a desktop (horizontal) or a tower (vertical) and requires optional stand.
Drive Lock	Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.
Boot Sectors Protection	MBR and GPT sectors of the hard drive are critical to booting the operating system. By saving the MBR or GPT data (depending on the how the OS was installed), the BIOS will be able to monitor for changes and allow the user to override them with the backup copy at boot-up.
Drive Protection System	DPS Access through F10 Setup during Boot (for SATA hard drive only) A diagnostic hard drive self- test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
SMART I - Drive Failure Prediction	Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count
SMART II - Off-Line Data Collection	By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure
SMART III – Off-Line Read Scanning with Defect Reallocation	IOEDC: I/O Error Detection Circuitry
SMART IV – End-to-End CRC for hard drives	Detects errors in Read/Write buffers on HDD cache RAM

AFTER MARKET OPTIONS

Graphics Solutions	Part Number
Nvidia A400 4GB DH 50W	AV8J3AA
Nvidia A1000 8GB DH 50W	AV8J4AA
HP HDMI Standard Cable Kit	T6F94AA
HP HDMI to VGA Adapter	H4F02AA
HP DisplayPort to VGA Adapter	AS615AA
HP DisplayPort to HDMI 1.4 Adapter	F3W43AA
HP DisplayPort to DVI-D Adapter	F7W96AA
HP USB-C to DisplayPort Adapter G2	8Y8Y1AA
HP USB-C to HDMI 2.0 Adapter	1WC36AA
HP USB-C to USB 3.0 Adapter	N2Z63AA

Data Storage Drives	Part Number
HP PCIe Gen 4 NVME TLC M.2 512GB SSD	406L8AA
HP PCIe Gen 4 NVME TLC M.2 1TB SSD	406L7AA
HP Small Form Factor 3.5in HDD Expansion Module	BJ3M7AA

Input Devices	Part Number
HP 405 Multi-Device Wired Backlit Keyboard	7N7B9UT
HP 475 Dual-Mode Wireless Keyboard	7N7B9AA
HP Business Slim v2 Smart Card USB Keyboard	A71J9AA
HP 455 Programmable Wireless Keyboard	4R177AA
HP 685 Comfort Dual-Mode Keyboard	8T6L9UT
HP 685 Comfort Dual-Mode Mouse	8T6M0UT
HP 685 Comfort Dual-Mode Keyboard and Mouse Combo	8T6L7UT
HP 725 Multi-Device Rechargeable Wireless Keyboard	9T5B2AA
HP 725 Multi-Device Rechargeable Wireless Keyboard and Mouse	9T5B0UT

System Memory	Part Number
HP 8GB DDR5-4800 UDIMM	4M9X9AA
HP 16GB DDR5-4800 UDIMM	4M9Y0AA
HP 32GB DDR5-4800 UDIMM	4M9Y2AA

Multimedia Devices	Part Number
HP S101 Speaker Bar	5UU40AA

QuickSpecs

HP EliteDesk 8 SFF G2a Desktop PC HP EliteDesk 8 SFF G2a Desktop Next Gen AI PC

Technical Specifications – After Market Options

Security Devices	Part Number
HP Business PC Security Lock v3 Kit	3XJ17AA
HP Keyed Cable Lock 10mm	T1A62AA
HP Master Keyed Cable Lock 10mm	T1A63AA

I/O Devices	Part Number
HP DisplayPort 2.1 Flex IO v3	B6BS8AA
HP USB-C 3.1 Gen2 15W Out Flex IO v3	B6BT3AA
HP USB 3.2 Gen1 x2 Module Flex IO v2	13L58AA
HP VGA Flex IO v3	B6BT0AA
HP Internal Serial Port (in rear wall)	3TK82AA
HP PCIe x1 Parallel Port Card	N1M40AA
HP USB to Serial Port Adapter	J7B60AA
HP Serial Port Flex IO v3	5B895AA
HP HDMI 2.1 Flex IO v3	B6BS9AA
HP Single Mini Display Port Adapter	2MY05AA

NOTE: For more detail on HPI/O Devices please refer to the HP FLEX IO Option Cards QuickSpecs:
<https://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c06042607>



Change Log

© Copyright 2026 HP Development Company, L.P.
The Information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. intel, Celeron, Core, Pentium are registered trademarks or trademarks of intel Corporation in the U.S. and/or other countries. Bluetooth® is a trademark of its proprietor, used by HP, inc. under license. USB Type-C® and USB-C® are trademarks of USB implementers Forum. NVIDIA, GeForce and NVS are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. AMD and Radeon are trademarks of Advanced Micro Devices, inc. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) In the United States and other countries.

Date	Version History	Action	Description of Change
	From v1 to v2	Update	
	From v2 to v3	Addition	
	From v3 to v4	Addition	
	From v4 to v5	Addition	
	From v5 to v6	Addition	
	From v6 to v7	Update	
	From v7 to v8	Update	
	From v8 to v9	Update	
	From v9 to v10	Update	
	From v10 to v11	Addition	
	From v11 to v12	Correction	
	From v12 to v13	Addition	
	From v13 to v14	Correction	
	From v14 to v15	Update	
	From v15 to v16	Addition	
	From v16 to v17	Update	

