


Overview


HP Z2 Mini G1i Workstation

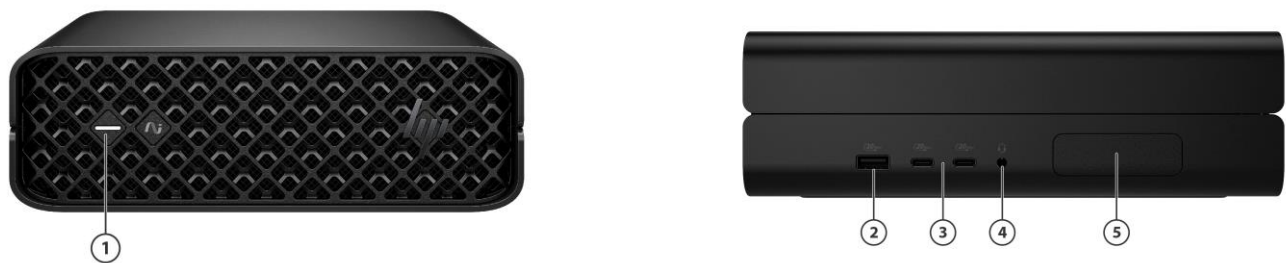

Front-Side View

- |  |                               |
|--|-------------------------------|
| 1. Power button  | 4. headphone/microphone combo |
| 2. 1 SuperSpeed USB Std-A 10Gbps (charge supports up to 5V/2.1A) | 5. Antenna cover              |
| 3. 2 SuperSpeed USB Type-C® 20Gbps (charge supports up to 5V/3A) |                               |

Overview

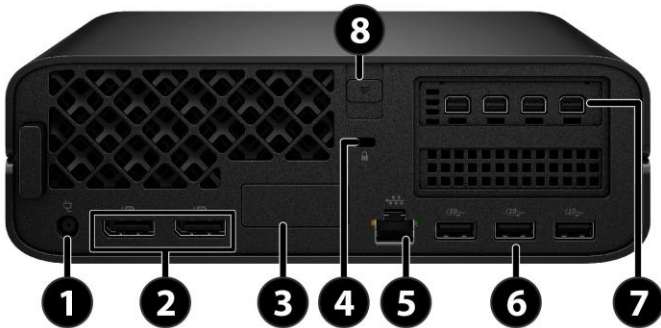

Rear View

1. Power connector

2. 2 DisplayPort™ 1.4

3. Flex IO, choice of:  
1 Dual SuperSpeed USB Std-A 5Gbps port, 1 SuperSpeed USB Type-C® 10Gbps port (Alt Mode DisplayPort™1.4 with 15W Output) <sup>1</sup>, 1 Dual SuperSpeed USB Type-C® 10Gbps port <sup>1</sup>, 1 Thunderbolt™ 4 port (40Gbps) <sup>1</sup>, HP Remote System Controller,  
1) 1GbE NIC, (1) 1Gbps Fiber LC NIC, (1) 2.5GbE NIC<sup>1</sup>, (1) 10GbE NIC<sup>1</sup>,

4. Security cable slot
5. 1 RJ-45

6. 3 SuperSpeed USB Std-A 10Gbps

7. PCIe, choose of:  
1 Dual SuperSpeed USB Std-A 10Gbps, Graphic cards, Serial port

8. Cover release latch

<sup>1</sup>Componet will be ready in 2025 Q3

### Overview

#### Operating Systems

##### Preinstalled:

- Windows 11 Pro 64<sup>1</sup>
- Windows 11 Home 64<sup>1</sup>
- Linux®-ready<sup>2</sup>
- Ubuntu® 24.04 LTS<sup>2,3</sup>

##### Supported:

- Red Hat® Enterprise Linux® Workstation 9<sup>2</sup>
- SUSE Linux® Enterprise Desktop 15<sup>2</sup>
- Ubuntu® 24.04 LTS<sup>2,3</sup>

<sup>1</sup> Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

<sup>2</sup> Not all features are available in all editions or versions of Ubuntu. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS to take full advantage of Ubuntu functionality. Ubuntu may be automatically updated. ISP fees may apply and additional requirements may apply over time for updates.

<sup>3</sup> A certified preloaded version of Ubuntu® 24.04 LTS is available from HP for this platform. Not all features are available in all editions or versions of Ubuntu. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS to take full advantage of Ubuntu functionality. Ubuntu may be automatically updated. ISP fees may apply, and additional requirements may apply over time for upgrades.

<sup>6</sup> For detailed OS/hardware support information for Linux, see:

[http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

**NOTE:** Your product does not support Windows 8 or Windows 7. In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows 7 operating system on products configured with Intel® and AMD® 7th generation and forward processors or provide any Windows® 8 or Windows 7 drivers on <http://www.support.hp.com>. A full list of HP products and the Windows 10 versions tested is available on the HP support website. <https://support.hp.com/us-en/document/c05195282>

#### Processors Overview<sup>1,2,3,4,5,6</sup>

Intel® Core™ Ultra 9 Processor 285K with Intel® Graphics (3.2 GHz E-core base frequency, 3.7 GHz P-core base frequency, up to 4.6 GHz E-core Max Turbo frequency, up to 5.5 GHz P-core Max Turbo frequency, 36 MB L3 cache, 8 P-cores and 16 E-cores, 24 threads)

Intel® Core™ Ultra 9 Processor 285 with Intel® Graphics (1.9 GHz E-core base frequency, 2.5 GHz P-core base frequency, up to 4.6 GHz E-core Max Turbo frequency, up to 5.4 GHz P-core Max Turbo frequency, 36 MB L3 cache, 8 P-cores and 16 E-cores, 24 threads)

Intel® Core™ Ultra 7 Processor 265K with Intel® Graphics (3.3 GHz E-core base frequency, 3.9 GHz P-core base frequency, up to 4.6 GHz E-core Max Turbo frequency, up to 5.4 GHz P-core Max Turbo frequency, 30 MB L3 cache, 8 P-cores and 12 E-cores, 20 threads)

Intel® Core™ Ultra 7 Processor 265 with Intel® Graphics (1.8 GHz E-core base frequency, 2.4 GHz P-core base frequency, up to 4.6 GHz E-core Max Turbo frequency, up to 5.2 GHz P-core Max Turbo frequency, 30 MB L3 cache, 8 P-cores and 12 E-cores, 20 threads)

Intel® Core™ Ultra 5 Processor 245K with Intel® Graphics (3.6 GHz E-core base frequency, 4.2 GHz P-core base frequency, up to 4.6



### Overview

GHz E-core Max Turbo frequency, up to 5.2 GHz P-core Max Turbo frequency, 24 MB L3 cache, 6 P-cores and 8 E-cores, 14 threads)  
 Intel® Core™ Ultra 5 Processor 245 with Intel® Graphics (3.0 GHz E-core base frequency, 3.5 GHz P-core base frequency, up to 4.5 GHz E-core Max Turbo frequency, up to 5.1 GHz P-core Max Turbo frequency, 24 MB L3 cache, 6 P-cores and 8 E-cores, 14 threads)  
 Intel® Core™ Ultra 5 Processor 235 with Intel® Graphics (2.9 GHz E-core base frequency, 3.4 GHz P-core base frequency, up to 4.4 GHz E-core Max Turbo frequency, up to 5.0 GHz P-core Max Turbo frequency, 24 MB L3 cache, 6 P-cores and 8 E-cores, 14 threads)  
 Intel® Core™ Ultra 5 Processor 225 with Intel® Graphics (2.7 GHz E-core base frequency, 3.3 GHz P-core base frequency, up to 4.4 GHz E-core Max Turbo frequency, up to 4.9 GHz P-core Max Turbo frequency, 20 MB L3 cache, 6 P-cores and 4 E-cores, 10 threads)

<sup>1</sup> Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

<sup>2</sup> Intel Turbo Boost performance varies depending on hardware, software and overall system configuration. See <http://www.intel.com/technology/turboboost> for more information.

<sup>3</sup> Intel vPro® requires Windows 10 Pro 64 bit or higher, a vPro supported processor, vPro enabled chipset, vPro enabled wired LAN and/or Wi-Fi 6E WLAN and TPM 2.0. Some functionality requires additional 3rd party software in order to run. Features of vPro® Essentials and Enterprise vary. See <http://intel.com/vpro>

<sup>4</sup> In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

<sup>5</sup> Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

<sup>6</sup> Features and software that require a NPU may require software purchase, subscription or enablement by a software or platform provider, and third party software may have specific configuration or compatibility requirements. Performance varies by use, configuration, and other factors.

### Expansion Slots

- 1 PCI Express Gen5 slot x16 mechanical/ x8 electrical (Low-profile HP graphics cards only\*) \* The HP Mini discrete graphics cards come with custom rear connector bulkhead. (see system board section for more details)

### Side I/O

1 headphone/microphone combo  
 1 SuperSpeed USB Std-A 10Gbps port (charge supports up to 5V/2.1A)  
 2 SuperSpeed USB Type-C® 20Gbps port (charge supports up to 5V/3A),

### Internal I/O [5]

### Rear I/O

(2) Display Port 1.4, (1) RJ-45, (3) SuperSpeed USB Std-A 10Gbps port

### Optional I/O

Flex IO\* – choose one of the following options: (1) Dual SuperSpeed USB Std-A 5Gbps port , (1) Dual SuperSpeed USB Type-C® 10Gbps port <sup>1</sup>, (1) SuperSpeed USB Type-C® 10Gbps port (Alt Mode DisplayPort™ 1.4 with 15W Output) <sup>1</sup>, (1) Thunderbolt™ 4<sup>1</sup>, (1) USB-based Serial port option, (1) Displayport 2.1 port, (1) HDMI 2.1 port, (1) VGA port, (1) 1GbE NIC, (1) 1Gbps Fiber LC NIC \*, (1) 2.5GbE NIC<sup>1</sup>, (1) 10GbE NIC \*

Through 1 PCIe bulkhead space– choose one of the following options: (1) serial port, (1) Dual SuperSpeed USB Std-A 10Gbps port

\*: Modern standby feature was not compatible risk (detail see NETWORKING / COMMUNICATION).



Overview

<sup>1</sup>Component will be ready in 2025Q3

Interfaces Supported	
On-board RAID Support	Factory integrated RAID 0, 1 for NVME drives
Chassis Dimensions (H x W x D)	H: 2.7" [6.9cm]
	W: 8.3" [21.1cm]
	D: 8.6" [21.8cm] (Standard desktop orientation)
Packaged Dimensions	L: 19.6" (49.9cm)
	W: 6.7" (16.9cm)
	H: 11.7" (29.7cm)
Rack Dimensions	5U, 6 units per shelf
Weight	Exact weights depend upon configuration (System weight only). Starting at 2.4 kg (5.29 lb)
Temperature	Operating: 5° to 35° C (40° to 95° F)
	Above 1524 m (5,000 feet) altitude, the maximum operating temperature is reduced by 1° C (1.8° F) for every 305 m (1,000 feet) increase in elevation
	Non-operating: -40° to 60° C (-40° to 140° F)
	Maximum rate of change: 10°C/hr
Humidity	Operating: 8% to 85% RH, non-condensing, 35° C maximum wet bulb
	Non-operating: 8% to 90% RH, non-condensing, 35° C maximum wet bulb
Maximum Altitude (non-pressurized) <sup>6</sup>	Operating (with Rotational Hard Drives): 3,048 m (10,000 feet)
	Operating (with only Solid-State Drives): 5,000 m (16,404 feet)
	Non-operating: 12,192 m (40,000 feet)
	Maximum operating temperature is reduced as altitude increases. See Temperature for details.
Power Adapter	280W 89% Average Efficiency.
	Power Adapter is external to the product.
Backup Devices	
Chipset	Intel® W880 Chipset
Memory	up to 96GB nECC at launch( or up to 128GB nECC, 64GB ECC later), DDR5 unbuffered DIMM memory.

### Supported Components

Processors	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Intel® Core™ Ultra Desktop Processors (series 2)</b>				
Intel® Core™ Ultra 9 285K Processor	Y	N		
Intel® Core™ Ultra 9 285 Processor	Y	N		
Intel® Core™ Ultra 7 265K Processor	Y	N		
Intel® Core™ Ultra 7 265 Processor	Y	N		
Intel® Core™ Ultra 5 245K Processor	Y	N		
Intel® Core™ Ultra 5 245 Processor	Y	N		
Intel® Core™ Ultra 5 235 Processor	Y	N		
Intel® Core™ Ultra 5 225 Processor	Y	N		1

**NOTE 1:** support only non-ECC memory

PCIe Solid State Drives	Factory Configured	Option Kit	Option Kit Part Number
Z Turbo 512GB 2280 PCIe-4x4 TLC M.2 Z2 Mini Kit SSD	Y	Y	4M9Z5AA
Z Turbo 1TB 2280 PCIe-4x4 TLC M.2 Z2 Mini Kit SSD	Y	Y	4M9Z6AA
Z Turbo 1TB 2280 PCIe-4x4 TLC M.2 Z2 Mini Kit SSD	Y	Y	4M9Z7AA
Z Turbo 512GB 2280 PCIe-4x4 SED OPAL2 TLC M.2 Z2 Mini Kit SSD	Y	Y	4M9Z9AA
Z Turbo 1TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 Z2 Mini Kit SSD	Y	Y	4N000AA
Z Turbo 2TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 Z2 Mini Kit SSD	Y	Y	4N001AA
HP 512GB 2280 PCIe-4x4 Value M.2 Z2 MINI Kit SSD	Y	Y	4N008AA
HP 256GB 2280 PCIe-4x4 Value M.2 Z2 MINI Kit SSD	Y	Y	4N009AA
HP 1TB 2280 PCIe-4x4 Value M.2 Z2 MINI Kit SSD	Y	Y	4N010AA
Z Turbo 4TB 2280 PCIe-4x4 TLC M.2 Z2 MINI Kit SSD	Y	Y	5S493AA



Supported Components

Z Turbo 4TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 Z2 MINI Kit SSD	Y	Y	5S499AA
Z Turbo 512GB 2280 PCIe-4x4 TLC M.2 China Z2 MINI Kit SSD	Y	Y	906H3AA
Z Turbo 1TB PCIe-4x4 TLC M.2 China Z2 MINI Kit SSD	Y	Y	906H9AA
HP Z Turbo 2TB 2280 PCIe-4x4 TLC M.2 China Z2 MINI Kit SSD	Y	Y	906J2AA
256GB 2280 PCIe-4x4 NVMe Value M.2 China Z2 MINI Kit SSD	Y	Y	906J8AA
HP 1TB 2280 PCIe-4x4 NVMe Value M.2 China Z2 MINI Kit SSD	Y	Y	906J9AA
512GB 2280 PCIe-4x4 NVMe Value M.2 China Z2 MINI Kit SSD	Y	Y	906K0AA
HP Z Turbo 1TB 2280 PCIe-5x4 TLC M.2 Z2 G12 MINI Kit SSD	Y	Y	A9TN7AA
HP Z Turbo 1TB 2280 PCIe-5x4 SED OPAL2 TLC M.2 Z2 G12 MINI Kit SSD	Y	Y	A9TN6AA
HP Z Turbo 2TB 2280 PCIe-5x4 TLC M.2 Z2 G12 MINI Kit SSD	Y	Y	A9TN9AA
HP Z Turbo 2TB 2280 PCIe-5x4 SED OPAL2 TLC M.2 Z2 G12 MINI Kit SSD	Y	Y	A9TN8AA

Graphics		Factory Configured	Option Kit	Option Kit Part Number	Supported # of cards	Support Notes
Graphics Cable Adapters	HP DisplayPort To VGA Adapter	Y	Y	AS615AA	TBD	TBD
	HP USB-C to DisplayPort Adapter	Y	Y	4SH08AA	TBD	TBD
	HP USB-C to HDMI Adapter	Y	Y	4SH07AA	TBD	TBD
	HP USB-C to VGA Adapter	Y	Y	4SH06AA	TBD	TBD
	HP Single miniDP-to-DP Adapter Cable	Y	Y	2MY05AA	TBD	TBD
Entry 3D	NVIDIA RTX A400 4 GB with Mini Bracket 4mDP Graphics	Y	Y	AV8J3AA	TBD	TBD
Mid-range 3D	NVIDIA RTX A1000 8 GB with Mini Bracket 4mDP Graphics	Y	Y	AV8J4AA	TBD	TBD
	NVIDIA RTX 2000 Ada 16 GB 4mDP Graphics	Y	Y	8D6B8AA	TBD	TBD
	NVIDIA RTX PH x2xxx 4DP Graphics	Y	Y	B5CH7AA		
High-End 3D	NVIDIA RTX 4000 SFF Ada 20 GB 4mDP Graphics	Y	Y	8C1W1AA	TBD	TBD
	NVIDIA RTX PH x4xxx 4mDP Graphics	Y	Y	TBC		

Supported Components

Memory	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
8GB DDR5 (1x8GB) 6400 CSODIMM NECC Memory	Y	N		
16GB (1x16GB) DDR5 6400 CSODIMM NECC Memory - NEW AMO	Y	Y	A9TM6AA	
32GB (1x32GB) DDR5 6400 CSODIMM NECC Memory - NEW AMO	Y	Y	A9TM7AA	
48GB (1x48GB) DDR5 6400 CSODIMM NECC Memory - NEW AMO	Y	Y	A9TM8AA	

Optical and Removable Storage	Factory Configured	Option Kit	Option Kit Part Number
HP USB External DVDRW Drive	N	Y	F2B56AA
HP USB External DVDRW Drive	N	Y	Y3T76AA

Networking and Communications	Factory Configured	Option Kit	Option Kit Part Number
HP 10GBase-T Flex IO	Y	Y	56Q71AA
HP Z2 2.5GbE LAN Flex Port	Y	Y	B96W7AA
HP 1GbE LAN Flex Port 2020	Y	Y	141J6AA
HP Flex 1GbE Fiber LC Single Port	Y	Y	20J15AA
Intel® Wi-Fi 6E AX211 BT 5.3 wireless card M.2 non-vPro	Y	N	
Intel® Wi-Fi 7 BE200 BT 5.4 wireless card M.2 non-vPro	Y	N	

**NOTE:** Specific Network on Modern standby feature Support limitation  
HP 10GBase-T Flex IO NIC does not support modern standby. And system equipped with those non modern standby network card, when monitor off and it is not really entered Modern standby state for wake-up function support, another path suggestion is Customer can use Onboard Lan for Wake event instead of legacy function WOL limitation because those commodities might not meet the required compliance standards in system modern



### Supported Components

[standby configuration.](#)

#### Input Devices

	Factory Configured	Option Kit	Option Kit Part Number
HP 685 Comfort Dual-Mode Keyboard	N	Y	8T6L9UT
HP 725 Multi-Device Rechargeable Wireless Keyboard	N	Y	9T5B2AA
HP Bus Slim v2 Smart Card USB Keyboard	Y	Y	A71J9AA
HP 125 G2 USB Wired Keyboard	Y	Y	AY2Y7AA
HP 320K G2 USB Wired Keyboard	Y	Y	9SR37UT
HP 685 Comfort Dual-Mode Keyboard and Mouse Combo	N	Y	8T6L7UT
HP 725 Multi-Device Rechargeable Wireless Keyboard and Mouse Combo	Y	Y	9T5B0UT
HP 655 Wireless Keyboard and Mouse Combo G2	N	Y	4R009UT
HP Wired Desktop 320MK Mouse and Keyboard G2	N	Y	9SR36UT
HP Wired 320M Mouse	Y	Y	9VA80AA
HP Creator 935 Black Wireless Mouse	N	Y	1D0K8AA
HP 128 LSR Wired Mouse	Y	Y	265D9AA
HP 125 Wired Mouse	Y	Y	265A9AA/AT/UT

#### Flex Module (Rear IO)

	Factory Configured	Option Kit	Option Kit Part Number
HP Serial Port v3 Flex IO	Y	Y	5B895AA
HP 10GBase-T Flex IO	Y	Y	56Q71AA
HP Z2 2.5GbE LAN Flex Port	Y	Y	B96W7AA
HP 1GbE LAN Flex Port 2020	Y	Y	141J6AA
HP Flex 1GbE Fiber LC Single Port	Y	Y	20J15AA

#### Other Hardware

	Factory Configured	Option Kit	Option Kit Part Number
HP Z2 Mini Remote System Controller Main Board Adapter	Y	Y	A6QT4AA
HP Z2 Mini Remote System Controller	Y	Y	7K6E4AA
HP Z2 Mini ePSU Sleeve	Y	Y	3RW68AA
HP B550 Z Display PC Mounting Bracket	N	Y	16U00AA
HP Rack Cable Management Arm	N	Y	35Z34AA



Supported Components

HP Z2 Mini Arm/Wall VESA Mount Solution	N	Y	4N004AA
HP Z2 Mini Vertical Stand	N	Y	4N006AA
HP Z2 Mini Serial Port v2 Adapter	Y	Y	4M9Y9AA
HP Z2 Mini Dual Type-A SuperSpeed USB 10Gbps Port	Y	Y	4M9Z0AA

Racking and  
Physical Security

	Factory Configured	Option Kit	Option Kit Part Number
HP Z Display B600 PC Mounting Bracket	N	Y	529H3AA
HP Z2 G1i Mini Rail Rack Kit	N	Y	A9TM4AA
HP Keyed Cable Lock	N	Y	T1A62AA
HP Master Keyed Cable Lock 10mm	N	Y	T1A63AA
HP Business PC Security Lock V3 Kit	N	Y	3XJ17AA

Software

	Factory Configured	Option Kit	Support Notes
HP PC Hardware Diagnostics UEFI	Y	N	1
HP PC Hardware Diagnostics Windows	Y	N	
HP Wolf Security	Y	N	
HP Notifications	Y	N	
HP Desktop Support Utility	Y	N	
HP Documentation	Y	N	
myHP	Y	N	
Kingsoft WPS Office	Y	N	2
Z by HP Data Science Stack Manager	Y	N	3
HP Image Assistant	N	N	
HP Support Assistant	N	N	

<sup>1</sup> Windows OS only  
<sup>2</sup> Only available in China  
<sup>3</sup> Optional software

Operating Systems

- Windows 11 Pro 64<sup>1</sup>
- Windows 11 Home 64 - HP recommends Windows 11 Pro<sup>1</sup>
- Linux®-ready<sup>4</sup>
- Ubuntu® 24.04 LTS<sup>2,3</sup>

### Supported Components

<sup>1</sup> Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 11 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

<sup>2</sup> Not all features are available in all editions or versions of Ubuntu®. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS to take full advantage of Ubuntu functionality. Ubuntu may be automatically updated. ISP fees may apply and additional requires may apply over time for updates.

<sup>3</sup> A certified preloaded version of Ubuntu® 24.04 LTS is available from HP for this platform. Not all features are available in all editions or versions of Ubuntu. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS to take full advantage of Ubuntu functionality. Ubuntu may be automatically updated. ISP fees may apply, and additional requirements may apply over time for upgrades.

<sup>4</sup>For detailed OS/hardware support information for Linux, see:

[http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

### HP BIOS

#### Additional HP BIOS Features:

- Power-On password – Helps prevent an unauthorized user from powering on the system.
- Administrator password – Also known as the BIOS Setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS cannot be updated and changes cannot be made to BIOS settings using BIOS Setup or under the OS.
- S4/S5 Maximum Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 0.5W in S4/S5 (when turned off). When S4/S5 Maximum Power Savings feature is enabled below features are turned off:
  - Power to expansion connectors / slots
  - Most Wake events other than power buttons and WOL(Wake on LAN supported by embedded Lan controller under S4/S5 Maximum Power Saving Enabled )
  - USB charging ports

#### HP Performance Control Modes

HP Z Desktop Workstations offers Performance Control Modes in the F10 BIOS menu. Z2 G1i offers Quiet Mode, Performance Mode, Rack Mode, and High-Performance Mode. HP recommends using High Performance Mode unless you have concerns about acoustics in an open office environment. Customers can achieve CPU performance gains in multithreaded workloads using High Performance Mode over Performance Mode\*. High Performance Mode is configured as default from the factory.

#### How to Set HP Performance Control Modes in HP F10 BIOS Menu

In the F10 BIOS Menu, the setting titled “Performance Control” is adjustable to High Performance Mode, Performance Mode or Quiet Mode. These modes are choice points for performance and acoustic tradeoffs based on user needs or recommended balanced conditions in performance and noise optimization.



---

### Supported Components

At startup, push the F10 key while system is booting to get to the BIOS Menu.  
Go to → Advanced → System Options → scroll down and choose “Performance Control”

Set the Performance Mode you desire and then go back to Main → Save Changes and Exit → Yes  
The machine will restart in the mode you’ve chosen.

#### **How to change Performance Modes in HP Performance Advisor software?**

Select BIOS Settings → Advanced → System Options → Performance Controls

The machine will restart in the mode you’ve chosen.

For more information on performance control modes, please see the white paper called, HP Performance Control Modes for Z Desktop Workstations.

### SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

#### **Software**

HP Support Assistant <sup>1</sup>  
HP Image Assistant  
HP Desktop Support Utility  
HP Documentation  
HP Notifications  
HP PC Hardware Diagnostics UEFI  
HP PC Hardware Diagnostics Windows  
myHP  
WSL/Ubuntu Data Science Stack  
HP Privacy Settings

#### **Manageability Features**

HP Driver Packs<sup>2</sup>  
HP UWP Pack  
HP System Software Manager (SSM)  
HP Manageability Integration Kit<sup>3</sup>  
HP Client Catalog (download)  
HP Image Assistant (download)  
HP Cloud Recovery  
HP Client Management Script Library (download)  
HP BIOSphere<sup>4</sup>  
BIOS Configuration Utility (download)



### Supported Components

#### Client Security Software

HP Client Security Suite<sup>5</sup> including: (including Credential Manager, HP Password Manager<sup>6</sup>, HP Spare Key)

HP Power On Authentication

Microsoft Defender<sup>7</sup>

#### Security Management

HP Secure Erase<sup>8</sup>

HP Wolf Pro Security Edition (optional) <sup>9</sup>

HP Wolf Security for Business<sup>10</sup> Includes:

HP Sure Click<sup>11</sup>

HP Sure Sense<sup>12</sup>

HP Sure Run<sup>13</sup>

HP Sure Recover<sup>14</sup>

HP Sure Start<sup>15</sup>

HP Tamper Lock

HP Sure Admin <sup>16</sup>

HP Client Security Manager<sup>17</sup>

Hood Sensor Optional Kit

<sup>1</sup> HP Support Assistant requires Windows and Internet access.

<sup>2</sup>HP Driver Packs not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>.

<sup>3</sup>HP Manageability Integration Kit can be downloaded from <http://www8.hp.com/us/en/ads/clientmanagement/overview.html>

<sup>4</sup> HP BIOSphere features may vary depending on the platform and configurations.

<sup>5</sup> HP Client Security Manager requires Windows and is available on the select HP PCs.

<sup>6</sup> HP Password Manager requires Internet Explorer or Chrome or FireFox. Some websites and applications may not be supported. User may need to enable or allow the add-on / extension in the internet browser.

<sup>7</sup> Microsoft Defender Opt in and internet connection required for updates.

<sup>8</sup> HP Secure Erase - –or the methods outlined in the National Institute of Standards and Technology Special Publication 800-88 “C“ear”  
“anitation method. HP Secure Erase does not support platforms with Intel® Optane.

<sup>9</sup> HP Wolf Pro Security Edition is available preloaded on select SKUs, and, depending on the HP product purchased, includes a license with a term length communicated to you at purchase and in your order confirmation email. The HP Wolf Pro Security Edition software is licensed under the license terms of the HP Wolf Security Software - End-User license Agreement (EULA) that can be found at: [https://support.hp.com/us-en/document/ish\\_3875769-3873014-16](https://support.hp.com/us-en/document/ish_3875769-3873014-16) as that EULA is modified by the following: 7. Term. Unless otherwise terminated earlier pursuant to the terms contained in this EULA, the license for the HP Wolf Pro Security Edition is effective upon 4 months after the date the HP Product was shipped by HP and will continue for the term communicated to you at purchase and in your order confirmation email (“Initial Term”). At the end of the Initial Term you may either (a) purchase a renewal license for the HP Wolf Pro Security Edition from HP.com, HP Sales or an HP Channel Partner, or (b) continue using the standard versions of HP Sure Click and HP Sure Sense at no additional cost with no future software updates or HP Support. Notwithstanding the foregoing, the license shall expire no later than one year after the fixed term of the subject license ends.



---

### Supported Components

<sup>10</sup> HP Wolf Security for Business requires Windows 10 or higher, includes various HP security features and is available on HP Pro, Elite, RPOS and Workstation products. See product details for included security features

<sup>11</sup> HP Sure Click requires Windows 10 Pro or higher or Enterprise. See [https://bit.ly/2PrLT6A\\_SureClick](https://bit.ly/2PrLT6A_SureClick) for complete details.

<sup>12</sup> HP Sure Sense requires Windows 11 Pro or Enterprise and supports Microsoft Internet Explorer, Google Chrome™, and Chromium™. Supported attachments include Microsoft Office (Word, Excel, PowerPoint) and PDF files in read only mode, when Microsoft Office or Adobe Acrobat are installed.

<sup>13</sup> HP Sure Run is available on select Windows 11 based HP Pro, Elite and Workstation PCs with select Intel® or AMD processors

<sup>14</sup> HP Sure Recover is available on select HP PCs and requires Windows 10 and an open network connection. You must back up important files, data, photos, videos, etc. before using HP Sure Recover to avoid loss of data. Network based recovery using Wi-Fi is only available on PCs with Intel Wi-Fi Module

<sup>15</sup> HP Sure Start is available on select HP PCs and workstations. See product specifications for availability.

<sup>16</sup> HP Sure Admin requires Windows 11, HP BIOS, HP Manageability Integration Kit from <http://www.hp.com/go/clientmanagement> and HP Sure Admin Local Access Authenticator smartphone app from the Android or Apple store.

<sup>17</sup> HP Client Security Manager requires Windows and is available on the select HP PCs.



System Technical Specifications

System Board

System Board Form Factor	198.65 x 192.21 mm (7.82 x 7.567 inch)
Processor Socket	Single LGA-1851
CPU Bus Speed	DMI 4.0
Chipset	Intel® PCH W880
Super I/O Controller	Nuvoton SIO24
Memory Expansion Slots	2 DDR5 memory slots
Memory Type Supported	DDR5, CSODIMM ECC & non-ECC
Memory Modes	Non-Interleaved for single channel. Interleaved when both channels are populated.
Memory Speed Supported	6400MT/s DDR5
Memory Protection	ECC available on data
Maximum Memory	128GB
Memory Configuration (Supported)	8GB, 16GB, 32GB, 48GB and 64GB non-ECC/16GB, 32GB ECC unbuffered DIMMs are supported. ECC and non-ECC memory DIMMs cannot be mixed on the same system.
PCI Express Connectors	<ul style="list-style-type: none"><li>• 1 PCI Express Gen5 slot x16 mechanical/ x8 electrical (Low-profile, full length, Riser only)</li><li>• 2 M.2 NVMe Storage (PCIe Gen5 x4)</li><li>• 1 M.2 WLAN (PCIe Gen4x1 + Intel CNVi)</li></ul>
Supported Interfaces	<p>In the PCIe Gen5 (x16 mechanical/x8 electrical) slot, it intent to supported HP certified dGFX card.</p> <p>PCIe</p> <p><b>Integrated RAID</b> RAID 0, 1</p> <p><b>Integrated Graphics</b> Intel® Graphics (on Core U9-285K/U7-265K/U5-254K/U9-285/U7-265/U5-245/U5-235/U5-225 processors); Based on Unified Memory Architecture (UMA) - a region of system memory is reserved and dedicated to the graphics display. Support for Microsoft DirectX 12, OpenGL 4.6 and OpenCL 3.0 on Intel® Graphics; 2x DP 1.4 graphics ports integrated in motherboard; Supports up to four simultaneous displays across DisplayPort*/HDMI*/DVI outputs. Max. resolution supported on onboard DP 1.4/HBR3 ports: 3840 x2160 @ 60Hz. Max. resolution supported on flexIO DP 2.1/UHBR20 ports: 8K60Hz compressed, 5K120Hz compressed</p> <p><b>Network Controller</b> Integrated Ethernet PHY Connection I219-LM. Management capabilities: WOL, PXE 2.1 and AMT 19</p> <p><b>Serial</b> 1 internal header (requires optional Serial Port Adapter Kit with PCIe Bracket)</p>

System Technical Specifications

USB Connector(s)	2 <sup>nd</sup> Serial	USB-based Serial port option through Flex IO
	HD Integrated Audio	Yes
	Side	1 SuperSpeed USB Std-A10Gbps port (support charging) 2 SuperSpeed USB Type-C® 20Gbps port (charge support up to 5V/3A)
	Rear	3 SuperSpeed USB Std-A 10Gbps port  Flex IO, choice of: 1 Dual SuperSpeed USB Std-A 5Gbps port, 1 SuperSpeed USB Type-C® 10Gbps port (Alt Mode DisplayPort™1.4 with 15W Output) <sup>1</sup> , 1 Dual SuperSpeed USB Type-C® 10Gbps port <sup>1</sup> , 1 Thunderbolt™ 4 port (40Gbps) <sup>1</sup>  PCIe, choose of: 1 Dual SuperSpeed USB Std-A 10Gbps
<sup>1</sup> Component will be ready in 2025Q3		
HD Integrated Audio	Yes	
Flash ROM	Yes	
CPU Fan Header	Yes	
Memory Fan Header	None	
Chassis Fan Header	None	
Front PCI Fan Header	None	
Front Control Panel/Speaker Header	Yes	
CMOS Battery Holder - Lithium	Yes	
Integrated Trusted Platform Module	Integrated TPM 2.0 Convertible to FIPS 140-2 Certified mode The TPM module disabled where restricted by law	
Power Supply Headers	DC Jack for adapter	
Power Switch, Power LED & Hard Drive LED Header	Yes	
Clear Password Jumper	None	
Keyboard/Mouse	USB	
Power Supply	280W 89% Average Efficiency	



System Technical Specifications

System Configurations		
HP Z2 Mini G1i Configuration #1	Processor Info	Intel Core Ultra 5 10C 3.3GHz LGA 65 W
	Memory Info	1x 16GB DDR5 NECC
	Graphics Info	1x NVIDIA RTX A400
	Disks/Optical/Floppy	1x 256GB PCIe-4x4 2280 Value M.2 SSD
	Power Supply	280W

Energy Consumption (Watts)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows long Idle (S0)	12.16		12.09		13.87	
	Windows short Idle (S0)	16.81		15.63		16.75	
	Windows Busy Typ (S0)	70.40		77.8		72.83	
	Windows Busy Max (S0)	92.5		95.28		96.51	
	Sleep (S3)	2.53	2.19	2.73	2.53	2.19	2.73
	Off (S5)	0.8	0.73	0.83	0.8	0.73	0.83
	Zero Power Mode (EuP)	0.16		0.18		0.15	

Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	41.49		41.25		47.33	
	Windows short Idle (S0)	57.36		52.41		57.15	
	Windows Busy Typ (S0)	240.21		265.46		248.51	
	Windows Busy Max (S0)	315.62		325.11		329.31	
	Sleep (S3)	8.63	7.47	9.32	8.63	7.47	9.32
	Off (S5)	2.73	2.49	2.83	2.73	2.49	2.83
	Zero Power Mode (EuP)	0.55		0.61		0.51	

HP Z2 Mini G1i Configuration #2	Processor Info	Intel Core Ultra 7 20C 2.4GHz LGA 65W
	Memory Info	1x 32GB DDR5 NECC
	Graphics Info	1x NVIDIA RTX A1000
	Disks/Optical/Floppy	1x 1TB 2280 PCIe-4x4 Val M.2 SSD

System Technical Specifications

	Power Supply	280W					
Energy Consumption (Watts)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows long Idle (S0)	12.24		11.29		11.59	
	Windows short Idle (S0)	13.43		14.45		13.97	
	Windows Busy Typ (S0)	124.25		176.88		126.66	
	Windows Busy Max (S0)	156.46		240.1		273.1	
	Sleep (S3)	1.82	1.72	1.75	1.82	1.72	1.75
	Off (S5)	0.66	0.67	0.67	0.66	0.67	0.67
	Zero Power Mode (EuP)	0.16		0.19		0.15	
Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	41.76		38.52		39.55	
	Windows short Idle (S0)	45.83		49.31		47.67	
	Windows Busy Typ (S0)	423.96		603.54		432.18	
	Windows Busy Max (S0)	533.86		819.26		931.86	
	Sleep (S3)	6.21	5.87	5.97	6.21	5.87	5.97
	Off (S5)	2.25	2.29	2.29	2.25	2.29	2.29
	Zero Power Mode (EuP)	0.55		0.65		0.51	
HP Z2 Mini G1i Configuration #3	Processor Info	Intel Core Ultra 9K 24C 3.7GHz LGA 125W					
	Memory Info	2x 48GB DDR5 NECC					
	Graphics Info	1x NVIDIA RTX 4000 SFF Ada					
	Disks/Optical/Floppy	2x 4TB 2280 PCIe-4x4 OPAL2 M.2 SSD					
	Power Supply	280W					
Energy Consumption (Watts)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows long Idle (S0)	16.23		15.94		16.22	

System Technical Specifications

	Windows short Idle (S0)	17.44		17.69		19.21	
	Windows Busy Typ (S0)	257.82		258.04		262.74	
	Windows Busy Max (S0)	327.4		308		315.7	
	Sleep (S3)	1.88	2.05	2.99	2.26	2.79	2.35
	Off (S5)	0.77	0.69	0.75	0.72	0.74	0.71
	Zero Power Mode (EuP)	0.16		0.19		0.16	
Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	55.38		54.39		55.34	
	Windows short Idle (S0)	59.51		60.36		65.55	
	Windows Busy Typ (S0)	879.72		880.47		896.51	
	Windows Busy Max (S0)	1,117.14		1,050.94		1,077.21	
	Sleep (S3)	6.41	6.99	10.20	7.71	9.52	8.02
	Off (S5)	2.63	2.35	2.56	2.46	2.52	2.42
	Zero Power Mode (EuP)	0.55		0.65		0.55	

- Operating Voltage Range** 90-264VAC
- Rated Voltage Range** 100-240VAC
- Rated Line Frequency** 50-60 Hz
- Operating Line Frequency Range** 47-63 Hz
- Rated Input Current** 4A
- Heat Dissipation** Typical: 896.51 btu/hr (225.92 kcal/hr)  
Maximum: 1117.14 btu/hr (281.519 kcal/hr)
- ENERGY STAR® certified** Yes  
(Config Dependent)
- CECP Compliant @ 220V** Yes
- FEMP Standby Power Compliant** Yes, with Wake-on-LAN disabled: <1W in S4/S5 - Power Off
- Built-in Self Test (BIST) LED** No

System Technical Specifications

**Surge Tolerant Full Ranging Power Supply**      Yes  
(withstands power surges up to 2000V)

**Hood Lock Header**      TBD

**ErP Lot 6- Tier 1 Compliance @ 230V**      Yes  
(<1W in S5 - power Off)

**ErP Lot 6- Tier 2 Compliance @ 230V**      Yes  
(<0.5W in S5 - power Off)

**Declared Noise Emissions** (Entry-level, Mid-level, and High-end configurations; tested on floor)

<b>System Configuration (Entry-level)</b>	<b>Processor Info</b>	Intel Core Ultra9 285/65W
	<b>Memory Info</b>	Hynix DDR5 6400 48GB x2
	<b>Graphics Info</b>	NA
	<b>Disks/Optical</b>	PHISON PSEIN004TP87MCO(4TB) x2
	<b>Power Supply</b>	280W

<b>Declared Noise Emissions</b>		<b>Sound Power</b> (LWAd, bels)	<b>Deskside Sound Pressure</b> (LpAm, decibels)
	<b>Idle</b>	2.6	15.8
	<b>Hard drive Operating (Drive Random Seek)</b>	3.8	28.2
	<b>Hard drive Operating (Active mode)</b>	TBD	TBD

<b>System Configuration (Mid-end)</b>	<b>Processor Info</b>	Intel Core Ultra9 285/65W
	<b>Memory Info</b>	Hynix DDR5 6400 48GB x2
	<b>Graphics Info</b>	NVIDIA RTX2000
	<b>Disks/Optical</b>	PHISON PSEIN004TP87MCO(4TB) x2
	<b>Power Supply</b>	280W

<b>Declared Noise Emissions</b>		<b>Sound Power</b> (LWAd, bels)	<b>Deskside Sound Pressure</b> (LpAm, decibels)
---------------------------------	--	---------------------------------	--

System Technical Specifications

	Idle	2.9	18
	Hard drive Operating (Drive Random Seek)	3.8	28.2
	Hard drive Operating (Active mode)	TBD	TBD

System Configuration (High-end)	Processor Info	Intel Core Ultra9 285/125W
	Memory Info	Hynix DDR5 6400 48GB x2
	Graphics Info	NVIDIA RTX4000
	Disks/Optical	PHISON PSEIN004TP87MCO(4TB) x2
	Power Supply	280W

Declared Noise Emissions		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3	17.9
	Hard drive Operating (Drive Random Seek)	3.7	27.5
	Hard drive Operating (Active mode)	NA	NA

Environmental Requirements	Temperature	Operating: 5° to 35° C (40° to 95° F) Non-operating: -40° to 60° C (-40° to 140° F) Maximum rate of change: 10°C/hr
	Humidity	Operating: 8% to 85% RH, non-condensing, 35° C maximum wet bulb Non-operating: 8% to 90% RH, non-condensing, 35° C maximum wet bulb
	Maximum Altitude	Operating (with Rotational Hard Drives): 3,048 m (10,000 feet) Operating (with only Solid-State Drives): 5,000 m (16,404 feet) Non-operating: 12,192 m (40,000 feet) Maximum operating temperature is reduced as altitude increases. See Cooling for details.
	Dynamic	Shock Operating: ½-sine: 40g, 2ms Non-operating: ½-sine: 165 cm/s, 2-3ms square: 422 cm/s, 30g  Vibration

System Technical Specifications

Cooling

Operating random: 0.5g (rms), 5-300 Hz, up to 0.00025g<sup>2</sup>/Hz  
Non-operating random: 2.0g (rms), 5-500 Hz, up to 0.0150 g<sup>2</sup>/Hz  
Above 1524 m (5,000 feet) altitude, the maximum operating temperature is reduced by 1° C (1.8° F) for every 305 m (1,000 feet) increase in elevation, up to 3048 m (10,000 feet)

Physical Security and Serviceability

Access Panel	Tool-less (Includes replacment storage and memory information)
Optical Drive	None
Hard Drives	None
Expansion Cards	M.2 module requires a screwdriver to be serviced and replaced. An option card requires a screwdriver to service and replace.
Processor Socket	Tool-less, except for the processor heatsink and fan
Blue User Touch Points	Yes, on internal chassis mechanisms
Color-coordinated Cables and Connectors	Yes
Memory	Tool-less
System Board	Screw-In
Dual Color Power and SSD LED	The Power LED is on the front of the system, and the SSD LED is located on the rear of the system (inside)
Dual Function Front Power Switch	Yes, causes a fail-safe power off when held for 4 seconds (default) or 15 seconds (can be configured by F10 BIOS setup\Advanced\System Options\Power button override)
Cable Lock Support	Yes, Kensington Cable Lock (optional): Locks <u>top</u> cover and secures chassis from theft 3 mm x 7 mm slot at rear of system
Solenoid Lock and Hood Sensor	Only Hood Sensor(optional)
Rear Port Control Cover	None
Power-On Password	Yes, prevents an unauthorized person from booting up the workstation
CPUs and Heatsinks	A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less
Internal Speaker	Yes
Access Panel Key Lock	The Kensington lock slot on the chassis serves this purpose
Integrated Chassis Handles	None
Power Supply	None

---

### System Technical Specifications

<b>PCI Card Retention</b>	None
<b>Setup Password</b>	Yes, prevents an unauthorized person from changing the workstation configuration

### Service, Support, and Warranty

On-site Warranty and Service<sup>1</sup>: One-year (1-1-1), limited warranty and service offering delivers on-site, next business-day<sup>2</sup> service for parts and labor and includes free telephone support<sup>3</sup> 8am – 5pm. Global coverage<sup>2</sup> ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering. 24/7 operation will not void the HP warranty. Storage devices are not covered under warranty for 24/7 operation except for Enterprise class HDDs.

**NOTE 1:** Terms and conditions may vary by country. Certain restrictions and exclusions apply.

**NOTE 2:** On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

**NOTE 3:** Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries. HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Service levels and response times for HP Care Packs may vary depending on your geographic location.

### Certification and Compliance

Environmental Sustainability questions concerning:

- Ecolabels (EPEAT, TCO, etc.)
- ENERGY STAR, California Energy Commission (CEC)
- Compliance with Environmental legislation (EU ErP, China CECP, EU RoHS and other countries)
- Supply Chain Social Environmental Responsibility (SER) (conflict minerals; human rights, etc.)
- Product specific environmental features (material content, packaging content, recycled content, etc.)
- China Energy Label (CEL)
- 

Please contact [sustainability@hp.com](mailto:sustainability@hp.com)

For country specific Regulatory Compliance approval documents or Regulatory and Safety questions concerning:

- Declarations of Conformity (for self-service, go to [https://www.hp.com/uk-en/certifications/technical/regulations-certificates.html?jumpid=ex\\_r135\\_uk/en/any/corp/hpuk-mu\\_chev/certificates](https://www.hp.com/uk-en/certifications/technical/regulations-certificates.html?jumpid=ex_r135_uk/en/any/corp/hpuk-mu_chev/certificates))
- GS Certificates
- Product Safety Certificates (UL, CB, BIS, etc.)
- EMC Certificates, Declarations of Conformity, or Certificates of Conformity (CE, FCC, ICES, etc.)
- CCC Certificates
- Ergonomics



### System Technical Specifications

Please contact [techregshelp@hp.com](mailto:techregshelp@hp.com)

#### BIOS

<b>BIOS 64-bit Services</b>	BIOS supports 64-bit Operating systems.
<b>PCI 3.0 Support</b>	Full BIOS support for PCI Express through industry standard interfaces
<b>ATAPI</b>	ATAPI Removable Media Device BIOS Specification Version 1.0.
<b>WMI Support</b>	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
<b>BIOS Power On</b>	Users can define a specific date and time for the system to power on.
<b>ROM Based Computer Setup Utility (F10)</b>	Review and customize system configuration settings controlled by the BIOS.
<b>System/Emergency ROM Flash Recovery with Video</b>	Recovers system BIOS in corrupted Flash ROM.
<b>Replicated Setup</b>	Saves BIOS settings to USB flash device in human readable file (HpSetup.txt). BiosConfigurationUtility.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).
<b>Boot Control</b>	Disables the ability to boot from removable media on supported devices.
<b>Memory Change Alert</b>	Alerts management console if memory is removed or changed.
<b>Thermal Alert</b>	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> <li>• NORMAL – normal temperature ranges.</li> <li>• ALERTED – excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown.</li> <li>• SHUTDOWN – excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs</li> </ul>
<b>Remote ROM Flash</b>	Provides secure, fail-safe ROM image management from a central network console.
<b>ACPI (Advanced Configuration and Power Management Interface)</b>	Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 6.0 for full compatibility with 64-bit operating systems.
<b>Ownership Tag</b>	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen.
<b>Remote Wakeup/Remote Shutdown</b>	System administrators can power on, restart, and power off a client computer from a remote location.
<b>Instantly Available PC (Suspend to RAM - –CPI sleep state Modern Standby)</b>	Allows for very low power consumption with quick resume time.





### System Technical Specifications

<b>Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)</b>	Allows a new or existing system to boot over the network and download software, including the operating system.
<b>ROM revision levels</b>	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS and WMI) so that management SW applications can use and report this information.
<b>System board revision level</b>	Allows management SW to read revision level of the system board. Revision level is digitally encoded into the HW and cannot be modified.
<b>Start-up Diagnostics (Power-on Self-Test)</b>	Assesses system health at boot time with selectable levels of testing.
<b>Auto Setup when new hardware installed</b>	System automatically detects addition of new hardware.
<b>Keyboard-less Operation</b>	The system can be booted without a keyboard.
<b>Localized ROM Setup</b>	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 15 languages with local keyboard mappings.
<b>Asset Tag</b>	The user or MIS to set a unique tag string in non-volatile memory.
<b>Per-slot Control</b>	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually
<b>Adaptive Cooling</b>	Control parameters are set according to detected hardware configuration for optimal acoustics.
<b>Pre-boot Diagnostics</b>	(Pre-video) critical errors are reported via beeps and blinks on the power LED.
<b>UEFI Specification Revision</b>	2.9
<b>ACPI</b>	Advanced Configuration and Power Management Interface, Version 6.0
<b>ATA (IDE)</b>	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
<b>CD Boot</b>	"El Torito" Bootable CD-ROM Format Specification Version 1.0
<b>EDD</b>	Enhanced Disk Drive Specification Version 1.1 BIOS Enhanced Disk Drive Specification Version 3.0 (Both Not support)
<b>EHCI</b>	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
<b>PCI</b>	PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft .7
<b>PCI Express</b>	PCI Express Base Specification, Revision 2.0 PCI Express Base Specification, Revision 3.0 PCI Express Base Specification, Revision 4.0
<b>PMM</b>	POST Memory Manager Specification, Version 1.01 (Not Support)
<b>SATA</b>	Serial ATA Specification, Revision 1.0a Serial ATA 3 Gb/s: Serial ATA Specification, Revision 2.5 Serial ATA 6 Gb/s: Serial ATA Specification, Revision 3.0
<b>SPD</b>	JEDEC JESD300-5



System Technical Specifications

TPM	Trusted Computing Group TPM Specification Version 2.0 (Nuvoton NPCT760HACYX or Infineon SLB9672). Common Criteria EAL4+ certified. FIPS 140-2 Certification TCG TPM Certified products list: <a href="http://www.trustedcomputinggroup.org/certification/tpm-certified-products/">http://www.trustedcomputinggroup.org/certification/tpm-certified-products/</a>
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB	Universal Serial Bus Revision 1.1 Specification Universal Serial Bus Revision 2.0 Specification Universal Serial Bus Revision 3.1 Specification Universal Serial Bus Revision 3.2 Specification
SMBIOS	System Management BIOS Reference Specification, Version 3.8

External BIOS simulator found at: <http://csrsm1.itcs.hp.com/>

Social and Environmental Responsibility

**Eco-Label**  
**Certifications & Declarations**

This product is low halogen except for configurations that include HP Z Turbo Quad Pro PCIe TLC SSD, CRU QX 428 & QX448 removable storage frames, ConnectX-6 DX Amphenol 10 & 25 Gb Transceivers, Broadcom 5720-2P NIC Card, power cords, cables, and peripherals. Service parts obtained after purchase may not be Low Halogen.

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- US Federal Energy Management Program (FEMP)
- EPEAT® Gold with Climate+ registered. See [www.epeat.net](http://www.epeat.net) for registration status and tier levels by country
- TCO Certified configurations available
- China Energy Conservation Program (CECP)
- China State Environmental Protection Administration (SEPA)
- Taiwan Green Mark
- Korea Eco-label
- Japan PC Green label\*

**Sustainable Impact Specifications**

- [Product Carbon Footprint \(hp.com\)](http://hp.com)
- System contains 25% ocean-bound plastics in fans
- System contains 65% post-consumer recycled plastics
- System contains 100% recycled rare earth elements in speaker magnet
- System has 100% sustainably sourced packaging
- 10% ITE-derived closed loop plastic
- Bulk packaging available



System Technical Specifications

- System contains 8% post-industrial recycled steel
- System has 80Plus Platinum rated power supplies
- System has a QR code enabled experience where the user has access to a product portal - complete with product feature highlights, sustainability information, getting started guides, and direct setup and support options
- New Energy Consumption dashboard available to customers providing timely and accurate carbon usage including recommended actions users can take to decrease carbon footprint.

**System Configuration** The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a “Typically Configured Notebook”.

**Energy Consumption  
(in accordance with  
US ENERGY STAR® test  
method)**

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Sort idle)	34.35	16.91	40.39
Normal Operation (Long idle)	33.26	51.65	37.12
Sleep	39.13	38.92	43.2
Off	1.27	1.34	0.78

**NOTE:**  
Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family . HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

**Heat Dissipation\***

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	117.45	57.82	138.10
Normal Operation (Long idle)	113.72	176.60	126.92
Sleep	133.79	133.08	147.71
Off	4.34	4.58	2.67

System Technical Specifications

**\*NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

**Longevity and Upgrading**

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

- Additional Information**
- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
  - This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
  - This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
  - This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see [www.epeat.net](http://www.epeat.net)
  - Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
  - This product is 94.8% recycle-able when properly disposed of at end of life.

Packaging Materials	External:	PAPER/Corrugated	674-grams
		PAPER/Molded Pulp	380-grams
	Internal:	Other (Bamboo fiber)	18-grams

The plastic packaging material contains at least 0.0% recycled content.

The corrugated paper packaging materials contains at least 62.5% recycled content.

**RoHS Compliance**

HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam.

We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products.

We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve.

To obtain a copy of the HP RoHS Compliance Statement, see [HP RoHS position statement](#).

### System Technical Specifications

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

[http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Bis(2-Ethylhexyl) phthalate (DEHP)
- Benzyl butyl phthalate (BBP)
- Dibutyl phthalate (DBP)
- Diisobutyl phthalate (DIBP)
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBT0)

#### Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.



### System Technical Specifications

#### End-of-life Management and Recycling

HP offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### HP, Inc. Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report  
<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>  
 Eco-label certifications  
<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>  
 ISO 14001 certificates:  
<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842>  
 and  
<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

#### footnotes

- Percentage of ocean-bound plastic contained in each component varies by product
- Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.
- External power supplies, WWAN modules, power cords, cables and peripherals excluded.
- 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.
- Fiber cushions made from 100% recycled wood fiber and organic materials.

### Manageability

#### Intel® Active Management Technology (AMT)

Intel® Active Management Technology (AMT) <sup>1</sup>

An advanced set of remote management features and functionality providing IT administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. Intel® AMT includes the following advanced management functions:

- Power Management (on, off, reset, graceful shutdown, sleep and hibernate)
- Hardware Inventory (includes BIOS and firmware revisions)
- Serial Over LAN (SOL)
- USB Redirect (Media Redirection)
- ME Wake-on-LAN (WOL)
- Ipv6 Support
- Host Base set-up and configuration



---

### System Technical Specifications

<b>HP Image Assistant</b>	<ul style="list-style-type: none"><li>• Management Engine (ME) firmware roll back</li></ul>
<b>System Software Manager</b>	Visit: <a href="http://ftp.hp.com/pub/caps-softpaq/cmit/HPIA.html">http://ftp.hp.com/pub/caps-softpaq/cmit/HPIA.html</a>
	For questions or support for SSM, please visit: <a href="http://www.hp.com/go/ssm">http://www.hp.com/go/ssm</a>

<sup>1</sup>Requires activation and a system with a corporate network connection, an Intel® AMT enabled chipset, and network hardware and software. For notebooks, Intel AMT may be unavailable or limited over a host OS-based VPN, when connecting wirelessly, on battery power, sleeping, hibernating, or powered off. Results dependent upon hardware, setup, and configuration. For more information, visit: <https://www.intel.com/content/www/us/en/architecture-and-technology/intel-active-managementtechnology.html>

---



Technical Specifications - Storage Drives

STORAGE

HP Z Turbo Drv PCIe-5X4 1TB TLC PCIe SSD	Capacity	1TB
	Protocol	PCIe
	Form Factor	M.2 in native Slot on motherboard
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	300TBW (TB Written)
	Reliability	1.5M Hours
	Interface	PCI Express 5.0 x4 electrical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	12000 MB/s*
	Sequential Write	10000 MB/s*
	Random Read	1500K IOPS*
	Random Write	1300K IOPS*
	End Subtitle	

\*Actual performance may vary.

HP Z Turbo Drv PCIe-5X4 2TB TLC PCIe SSD	Capacity	2TB
	Protocol	PCIe
	Form Factor	M.2 in native Slot on motherboard
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	600TBW (TB Written)
	Reliability	1.5M Hours
	Interface	PCI Express 5.0 x4 electrical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	12000 MB/s*
	Sequential Write	11000 MB/s*
	Random Read	1500K IOPS*
	Random Write	1300K IOPS*
	End Subtitle	

\*Actual performance may vary.

HP Z Turbo Drv PCIe Gen5x4 1TB TLC PCIe SED OPAL2	Capacity	1TB
	Protocol	PCIe
	Form Factor	M.2 in native Slot on motherboard
	Controller	NVMe



Technical Specifications - Storage Drives

NAND Type	3D TLC
Endurance	300TBW (TB Written)
Reliability	1.5M Hours
Interface	PCI Express 5.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	12000 MB/s*
Sequential Write	10000 MB/s*
Random Read	1500K IOPS*
Random Write	1300K IOPS*
End Subtitle	
Self-Encrypting Drive Support	OPAL2

\*Actual performance may vary.

HP Z Turbo Drv PCIe Gen5x4  
2TB  
TLC PCIe SED OPAL2

Capacity	2TB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	600TBW (TB Written)
Interface	PCI Express 5.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	12000 MB/s*
Sequential Write	11000 MB/s*
Random Read	1500K IOPS*
Random Write	1300K IOPS*
End Subtitle	
Self-Encrypting Drive Support	OPAL2

\*Actual performance may vary.

HP Z Turbo Drv PCIe-4X4  
512GB  
TLC PCIe SSD

Capacity	512GB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	150TBW (TB Written)
Reliability	1.5M Hours
Interface	PCI Express 4.0 x4 electrical

Technical Specifications - Storage Drives

<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
<b>Performance</b>	
<b>Sequential Read</b>	6400MB/s*
<b>Sequential Write</b>	3400MB/s*
<b>Random Read</b>	600K IOPS*
<b>Random Write</b>	600K IOPS*
<b>End Subtitle</b>	

\*Actual performance may vary.

HP Z Turbo Drv PCIe-4X4 1TB  
TLC PCIe SSD

<b>Capacity</b>	1TB
<b>Protocol</b>	PCIe
<b>Form Factor</b>	M.2 in native Slot on motherboard
<b>Controller</b>	NVMe
<b>NAND Type</b>	3D TLC
<b>Endurance</b>	300TBW (TB Written)
<b>Reliability</b>	1.5M Hours
<b>Interface</b>	PCI Express 4.0 x4 electrical
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
<b>Performance</b>	
<b>Sequential Read</b>	6500MB/s*
<b>Sequential Write</b>	5000MB/s*
<b>Random Read</b>	800K IOPS*
<b>Random Write</b>	800K IOPS*
<b>End Subtitle</b>	

\*Actual performance may vary.

HP Z Turbo Drv PCIe-4X4 2TB  
TLC PCIe SSD

<b>Capacity</b>	2TB
<b>Protocol</b>	PCIe
<b>Form Factor</b>	M.2 in native Slot on motherboard
<b>Controller</b>	NVMe
<b>NAND Type</b>	3D TLC
<b>Endurance</b>	600TBW (TB Written)
<b>Reliability</b>	1.5M Hours
<b>Interface</b>	PCI Express 4.0 x4 electrical
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
<b>Performance</b>	
<b>Sequential Read</b>	6500MB/s*
<b>Sequential Write</b>	5000MB/s*
<b>Random Read</b>	800K IOPS*
<b>Random Write</b>	800K IOPS*
<b>End Subtitle</b>	

Technical Specifications - Storage Drives

\*Actual performance may vary.

HP Z Turbo Drv PCIe-4X4 4TB TLC PCIe SSD	Capacity	4TB
	Protocol	PCIe
	Form Factor	M.2 in native Slot on motherboard
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	600TBW (TB Written)
	Reliability	1.5M Hours
	Interface	PCI Express 4.0 x4 electrical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	6500MB/s*
	Sequential Write	5000MB/s*
	Random Read	800K IOPS*
	Random Write	800K IOPS*
	End Subtitle	

\*Actual performance may vary.

HP Z Turbo Drv PCIe Gen4x4 512GB TLC PCIe SED OPAL2	Capacity	512GB
	Protocol	PCIe
	Form Factor	M.2 in native Slot on motherboard
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	150TBW (TB Written)
	Reliability	1.5M Hours
	Interface	PCI Express 4.0 x4 electrical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	6400MB/s*
	Sequential Write	3400MB/s*
	Random Read	600K IOPS*
	Random Write	600K IOPS*
	End Subtitle	
	Self-Encrypting Drive Support	OPAL2

\*Actual performance may vary.

HP Z Turbo Drv PCIe Gen4x4 1TB TLC PCIe SED OPAL2	Capacity	1TB

Technical Specifications - Storage Drives

Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	300TBW (TB Written)
Reliability	1.5M Hours
Interface	PCI Express 4.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	6500MB/s*
Sequential Write	5000MB/s*
Random Read	800K IOPS*
Random Write	800K IOPS*
End Subtitle	
Self-Encrypting Drive Support	OPAL2

\*Actual performance may vary.

HP Z Turbo Drv PCIe Gen4x4  
2TB  
TLC PCIe SED OPAL2

Capacity	2TB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	600TBW (TB Written)
Interface	PCI Express 4.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	6500MB/s*
Sequential Write	5000MB/s*
Random Read	800K IOPS*
Random Write	800K IOPS*
End Subtitle	
Self-Encrypting Drive Support	OPAL2

\*Actual performance may vary.

HP Z Turbo Drv PCIe Gen4x4  
4TB  
TLC PCIe SED OPAL2

Capacity	4TB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC

Technical Specifications - Storage Drives

Endurance	600TBW (TB Written)
Interface	PCI Express 4.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	6500MB/s*
Sequential Write	5000MB/s*
Random Read	800K IOPS*
Random Write	800K IOPS*
End Subtitle	
Self-Encrypting Drive Support	OPAL2

\*Actual performance may vary.

256GB 2280 PCIe-4x4 Value  
M.2 SSD

Capacity	256GB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	200TBW (TB Written)
Reliability	1.5M Hours
Interface	PCI Express 4.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	3100MB/s*
Sequential Write	1400MB/s*
Random Read	200K IOPS*
Random Write	400K IOPS*
End Subtitle	

\*Actual performance may vary.

512GB 2280 PCIe-4x4 Value  
M.2 SSD

Capacity	512GB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	300TBW (TB Written)
Reliability	1.5M Hours
Interface	PCI Express 4.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	3400MB/s*
Sequential Write	2500MB/s*

Technical Specifications - Storage Drives

	Random Read	380K IOPS*
	Random Write	430K IOPS*
	End Subtitle	
*Actual performance may vary.		
1TB 2280 PCIe-4x4 Value M.2 SSD	Capacity	1TB
	Protocol	PCIe
	Form Factor	M.2 in native Slot on motherboard
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	400TBW (TB Written)
	Reliability	1.5M Hours
	Interface	PCI Express 4.0 x4 electrical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	3400MB/s*
	Sequential Write	2500MB/s*
	Random Read	500K IOPS*
	Random Write	440K IOPS*
	End Subtitle	

\*Actual performance may vary.

512GB TLC PCIe Gen3x4 SED FIPS 140-2	Capacity	512GB
	Protocol	PCIe
	Form Factor	M.2 in native Slot on motherboard
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	320 TBW (TB Written)
	Reliability	1.5M Hours
	Interface	PCI Express 3.0 x4 electrical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	up to 3400MB/s <sup>1</sup>
	Sequential Write	up to 2500MB/s <sup>1</sup>
	Random Read	420K IOPS <sup>1</sup>
	Random Write	635K IOPS <sup>1</sup>
	End Subtitle	
	Self-Encrypting Drive Support	OPAL2/FIPS 140-2

\*Actual performance may vary.

1TB TLC PCIe Gen3x4 SED FIPS	Capacity	1TB
------------------------------	----------	-----

Technical Specifications - Storage Drives

140-2

Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	1620 TBW (TB Written)
Reliability	1.5M Hours
Interface	PCI Express 3.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	3400MB/s* 1
Sequential Write	3000MB/s* 1
Random Read	720K IOPS* 1
Random Write	690K IOPS* 1
End Subtitle	
Self-Encrypting Drive Support	OPAL2/FIPS 140-2

\*Actual performance may vary.

2TB TLC PCIe Gen3x4 SED FIPS 140-2

Capacity	2TB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	3140 TBW (TB Written)
Interface	PCI Express 3.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	3400MB/s*
Sequential Write	3000MB/s*
Random Read	720K IOPS*
Random Write	690K IOPS*
End Subtitle	
Self-Encrypting Drive Support	OPAL2/FIPS 140-2

\*Actual performance may vary.

Citadel 512GB TLC PCIe Gen3x4 Advence FIPS 140-2

Capacity	512GB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	320 TBW (TB Written)

Technical Specifications - Storage Drives

Reliability	1.5M Hours
Interface	PCI Express 3.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	up to 3400MB/s <sup>1</sup>
Sequential Write	up to 2500MB/s <sup>1</sup>
Random Read	420K IOPS <sup>1</sup>
Random Write	635K IOPS <sup>1</sup>
End Subtitle	
Self-Encrypting Drive Support	OPAL2/FIPS 140-2

\*Actual performance may vary.

Citadel 1TB TLC PCIE Gen3x4  
Advence FIPS 140-2

Capacity	1TB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	1620 TBW (TB Written)
Reliability	1.5M Hours
Interface	PCI Express 3.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	3400MB/s* <sup>1</sup>
Sequential Write	3000MB/s* <sup>1</sup>
Random Read	720K IOPS* <sup>1</sup>
Random Write	690K IOPS* <sup>1</sup>
End Subtitle	
Self-Encrypting Drive Support	OPAL2/FIPS 140-2

\*Actual performance may vary.

Citadel 2TB TLC PCIE Gen3x4  
Advence FIPS 140-2

Capacity	2TB
Protocol	PCIe
Form Factor	M.2 in native Slot on motherboard
Controller	NVMe
NAND Type	3D TLC
Endurance	3140 TBW (TB Written)
Interface	PCI Express 3.0 x4 electrical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	
Sequential Read	3400MB/s* <sup>1</sup>
Sequential Write	3000MB/s* <sup>1</sup>



## Technical Specifications - Storage Drives

Random Read	720K IOPS*
Random Write	690K IOPS*
End Subtitle	
Self-Encrypting Drive Support	OPAL2/FIPS 140-2

\*Actual performance may vary.



### Technical Specifications - Graphics

<b>NVIDIA® RTX™ A400 4GB</b>	<b>Form Factor</b>	Half Height Single Slot (2.7" Height x 6.4" Length)
	<b>Graphics Controller</b>	Max Power: 50 Watts Cooling Solution: Active fan heatsink
	<b>Bus Type</b>	PCI Express 4.0 x 8
	<b>Memory</b>	4GB GDDR6 Memory Bandwidth: 96 GB/s Memory Width: 64-bit
	<b>Connectors</b>	4x Mini DisplayPort 1.4a
	<b>Max simultaneous displays</b>	4x 4096 x 2160 @ 120 Hz 4x 5120 x 2880 @ 60 Hz 2x 7680 x 4320 @ 60 Hz
	<b>Available Graphics Drivers</b>	Windows 10 64-bit Windows 11 64-bit Linux® 64-bit (selected Enterprise distributions)
HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>		

<b>NVIDIA® RTX™ A1000 8GB</b>	<b>Form Factor</b>	Half Height Single Slot (2.7" Height x 6.4" Length)
	<b>Graphics Controller</b>	Max Power: 50 Watts Cooling Solution: Active fan heatsink
	<b>Bus Type</b>	PCI Express 4.0 x 8
	<b>Memory</b>	4GB GDDR6 Memory Bandwidth: 96 GB/s Memory Width: 128-bit
	<b>Connectors</b>	4x Mini DisplayPort 1.4a
	<b>Max simultaneous displays</b>	4x 4096 x 2160 @ 120 Hz 4x 5120 x 2880 @ 60 Hz 2x 7680 x 4320 @ 60 Hz
	<b>Available Graphics Drivers</b>	Windows 10 64-bit Windows 11 64-bit Linux® 64-bit (selected Enterprise distributions)
HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>		

### Technical Specifications - Graphics

<b>NVIDIA® RTX™ 2000 Ada 16GB</b>	<b>Form Factor</b>	Half Height Dual Slot (2.7" Height x 6.7" Length)
	<b>Graphics Controller</b>	Max Power: 70 Watts Cooling Solution: Active fan heatsink
	<b>Bus Type</b>	PCI Express 4.0 x 8
	<b>Memory</b>	16GB GDDR6 Memory Bandwidth: 224 GB/s Memory Width: 128-bit
	<b>Connectors</b>	4x Mini DisplayPort 1.4a
	<b>Max simultaneous displays</b>	4x 4096 x 2160 @ 120 Hz 4x 5120 x 2880 @ 60 Hz 2x 7680 x 4320 @ 60 Hz
	<b>Available Graphics Drivers</b>	Windows 10 64-bit Windows 11 64-bit Linux® 64-bit (selected Enterprise distributions)
HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>		

<b>NVIDIA® RTX™ 4000 SFF Ada 20GB</b>	<b>Form Factor</b>	Half Height Dual Slot (2.7" Height x 6.7" Length)"
	<b>Graphics Controller</b>	Max Power: 70 Watts Cooling Solution: Active fan heatsink
	<b>Bus Type</b>	PCI Express 4.0 x 16
	<b>Memory</b>	20GB GDDR6 Memory Bandwidth: 280 GB/s Memory Width: 160-bit
	<b>Connectors</b>	4x DisplayPort 1.4a
	<b>Max simultaneous displays</b>	4x 4096 x 2160 @ 120 Hz 4x 5120 x 2880 @ 60 Hz 2x 7680 x 4320 @ 60 Hz
	<b>Available Graphics Drivers</b>	Windows 10 64-bit Windows 11 64-bit Linux® 64-bit (selected Enterprise distributions)

---

### Technical Specifications - Graphics

HP qualified drivers may be preloaded or available from the HP support Web site:  
<http://welcome.hp.com/country/us/en/support.html>

---



### Technical Specifications - Networking and Communications

#### NETWORKING / COMMUNICATION

<b>Integrated Intel® I219LM PCIe GbE Controller (Intel® vPro™ with Intel® AMT 19.0)</b>	<b>Connector</b>	RJ-45
	<b>Cabling</b>	Twin Axial Cabling up to 10m
	<b>Controller</b>	Intel® I219LM GbE platform LAN connect networking controller
	<b>Memory</b>	3 KB Tx and 3KB Rx FIFO packet buffer memory
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	802.1as/1588, 802.1p, 802.1Q, 802.3, 802.3ab, 802.3az, 802.3i, 802.3u, 802.3z
	<b>Bus Architecture</b>	PCI Express and SMBus
	<b>Data Transfer Mode</b>	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
	<b>Power Requirement</b>	Requires 3.3V (integrated regulators for core Vdc)
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Mode</b>	Full-duplex; Half-duplex (not supported for the 1000BASE-T transceiver)
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	<b>Management Capabilities</b>	vPro, WOL, auto MDI crossover, PXE, Muli-port teaming, RSS, ACPI, Advanced cable diagnostic, loopback modes, AMT 12.0 support, Circuit Breaker, VLAN, Multicast Listener Discovery (MLD)
	<b>Notes</b>	<b>NOTE1:</b> NDIS driver limitation and Wind11 OS, I219 switch to NDIS Driver and it only support IPV4 wake from MSC, if using IPV6 can't wake up from MSC. <b>NOTE2:</b> S4 can't wake up limitation on the NDIS Driver known issue.
<b>HP 1-Port 1GbE Flex IO NIC</b>	<b>Connector</b>	RJ-45 (Single Port)
	<b>Cabling</b>	Twisted Pair Cabling, up to 100 meter, 2.5GbE on CAT 5e UTP and up, 1GbE/10Mbps on CAT 5 UTP and up
	<b>Controller</b>	Realtek 8153 Ethernet Controller
	<b>Data Rates Supported</b>	10/100/1000 Mbps 802.3 (LAN) 802.3u (100BASE-TX) 802.3ab (1000BASE-T) 802.3x (Ethernet Flow Control) 802.1Q (Virtual LAN) 802.1P Layer 2 Priority Encoding 802.3az (Energy Efficient Ethernet)
	<b>Compliance</b>	
	<b>Bus Architecture</b>	USB
	<b>Power Requirement</b>	3.8 Watts
	<b>Boot ROM Support</b>	Yes



### Technical Specifications - Networking and Communications

<b>Network Transfer Mode</b>	Full-duplex; Half-duplex
<b>Network Transfer Rate</b>	1000BASE-T Full-Duplex 100BASE-TX Full-Duplex 100BASE-TX Half-Duplex 10BASE-T Full-Duplex 10BASE-T Half-Duplex

<b>HP 2.5GbE LAN Flex Port</b>	<b>Connector</b>	RJ-45 (Single Port)
	<b>Cabling</b>	Twisted Pair Cabling, up to 100 meter, 2.5GbE on CAT 5e UTP and up, 2.5GbE/1GbE/10Mbps on CAT 5 UTP and up
	<b>Controller</b>	I226
	<b>Data Rates Supported</b>	10/100/1000Mbps and 2.5Gbps BASE-T
	<b>Compliance</b>	IEEE: 802.3 (Ethernet Interface for 2500BASE-T, 1000BASE-T, 100BASE-TX, and 10BASE-TE) 802.1AS-Rev 802.1Q (Virtual LAN) 802.1Qav 802.1Qbu 802.1Qbv 1588 802.1AS-REV 802.1p/Q 802.3br 802.3az (Energy Efficient Ethernet) 802.3x (Ethernet Flow Control) 802.3z CB Certification (International Safety) NRTL UL Certification (North America Safety) FCC Class B (USA) CE (European Union) ICES-003 Class B (Canada) BSMI (Taiwan) VCCI (Japan) KCC (Korea) CTICK (Australia/New Zealand) UKCA (UK) UL (Safety) RoHS (Restricted or Hazardous Substances)
	<b>Bus Architecture</b>	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx and low power states)
	<b>Power Requirement</b>	2.5W
	<b>Network Transfer Mode</b>	Full-duplex; Half-duplex
	<b>Network Transfer Rate</b>	2500BASE-T Full-Duplex 1000BASE-T Full-Duplex 100BASE-TX Full-Duplex 100BASE-TX Half-Duplex 10BASE-T Full-Duplex 10BASE-T Half-Duplex

<b>HP 10GBase-T Flex IO</b>	<b>Connector</b>	RJ-45 (Single Port)
	<b>Cabling</b>	10GbE over Category 6a (or better) up to 100m 5GbE over Category 5e (or better) up to 100m
	<b>Controller</b>	Marvell AQC113C
	<b>Data Rates Supported</b>	10/100/1000 Mbps and 2.5/5/10 Gbps
	<b>Compliance</b>	802.3-2018 Clauses 55 and 126 802.3az (Energy Efficient Ethernet) 1588



Technical Specifications - Networking and Communications

	v2 (Precision Clock Synchronization) NBASE-T™ Alliance PHY Specification CB Certification (International Safety) NRTL UL Certification (North America Safety) FCC Class B (USA) CE (European Union) ICES-003 Class B (Canada) BSMI (Taiwan) VCCI (Japan) KCC (Korea) CTICK (Australia/New Zealand) UKCA (UK) UL (Safety) RoHS (Restricted or Hazardous Substances)
Bus Architecture	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx and low power states)
Power Requirement	6.5W
Network Transfer Mode	Full duplex; Half-duplex
Network Transfer Rate	10G BASE-T 5G BASE-T 2.5G BASE-T 2.5GBASE-T 1000BASE-T 100BASE-TX 10BASE-T Te
Notes	<b>NOTE 1:</b> Modern standby feature was not support & Suggest Customer use Onboard Lan for Wake event instead of FLEX IO MSC Wake The HP 10GBase-T Flex IO NIC can't support MSC (modern standby)/ S4/S5 wake, suggestion customer can use Onboard Lan RDP wake to replace the MSC Wake instead of FLEX IO MSC Wake & Not support.  <b>NOTE 2:</b> Known issue with connection by FLEX IO module of LAN Cable, sometimes will auto resume in S4/S5 risk or User can manually disabled 10GBase-T FLOEX Wake function by changing the driver (Device Manager) this setting for “Wake from power off state” in Advanced.

HP Flex 1GbE Fiber LC Single Port	Connector	1 LC Optical Fiber Port (Little Connector)
	Cabling	Optical Multi Mode Fiber OM2 or better
	Controller	AT-29M2
	Data Rates Supported	1GbE
	Compliance	IEEE 802.3 IEEE 802.3u IEEE 802.3ab IEEE 802.1q VLAN Tagging IEEE 802.1AS IEEE 1588 IEEE 802.3az Energy Efficient Ethernet CB Certification (International Safety) NRTL UL Certification (North America Safety) FCC Class B (USA) CE (European Union) ICES-003 Class B (Canada) BSMI (Taiwan) VCCI (Japan) KCC (Korea) CTICK (Australia/New Zealand) UKCA (UK) UL (Safety) RoHS (Restricted or Hazardous Substances)

Technical Specifications - Networking and Communications

Bus Architecture	USB 3.1 interface,, USB 2.0 interface,
Power Requirement	Requires 3.3V (integrated regulators for core Vdc)
Power Requirement	Up to 3W

Intel® Wi-Fi 6E* AX211 802.11ax, BT 5.3, M.2	WLAN Standards	IEEE 802.11a, b, d, e, g, h, i, k, n, r, u, v, w, ac, ax; Fine Timing Measurement based on 802.11-2016, 802.11az HW readiness
	Antenna	2x2 Dual-Band
	Bluetooth Standards	5.3
	Operating Temperature	32° to 122° F (0° to 50° C)
	Interface	M.2 CNVio2
	Dimensions	M.2 2230
	Kit Contents	Not Available

Wi-Fi 6E requires a Wi-Fi 6E router, sold separately, to function in the 6GHz band. Availability of public wireless access points is limited. Wi-Fi 6E is backward compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported.

Intel® Wi-Fi 7 BE200 802.11be, BT 5.4, M.2	WLAN Standards	IEEE 802.11a, b, d, e, g, h, i, k, n, r, u, v, w, ac, ax, be; Fine Timing Measurement based on 802.11-2016, 802.11az HW readiness
	Antenna	2x2 Dual-Band
	Bluetooth Standards	5.4
	Operating Temperature	32° to 122° F (0° to 50° C)
	Interface	M.2: PCIe, USB
	Dimensions	"M.2 2230
	Kit Contents	"Not Available

Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 7 (802.11BE) functionality requires Windows 11 24H2, select Intel® processor, and a Wi-Fi 7 router, sold separately. Wi-Fi 7 is backward compatible with prior 802.11 specs. Available in countries where Wi-Fi 7 is supported.



Date of change	Version History		Description of change
	From v1 to v2		

© Copyright 2025 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Core, Thunderbolt and Intel vPro are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. USB Type-C® and USB-C® are trademarks of USB Implementers Forum. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.