


Key Features

Stunning 4K Ultra HD Resolution | SuperClear® IPS Panel Technology |
 HDR10 Content Support | Frameless Design | Next Generation
 Connectivity




Product Description


Whether for office use or for enjoying entertainment at home, the ViewSonic® VX2776-4K-mhd is designed to take your viewing experience to another level. With a SuperClear® IPS panel and a sleek frameless design, this monitor provides a near-seamless viewing experience ideal for multi-monitor setups. Stunning 4K Ultra HD resolution delivers 4-times more pixels than Full HD monitors, which boosts efficiency and image detail needed for work or play. A mega dynamic contrast ratio of 80M:1 delivers enhanced image depth for a better user experience. Moreover, HDR10 content support delivers vivid colors and brightness that exceed standard monitors. Built-in HDMI and DisplayPort inputs deliver flexible connectivity options for a wide range of devices.

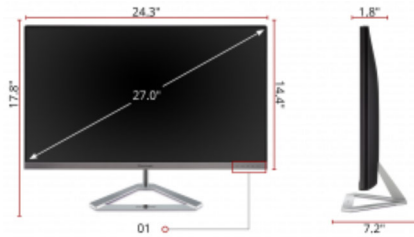

01
 Menu Control Panel
 Internal Speakers
 HDMI (x2)
 DisplayPort
 AC In

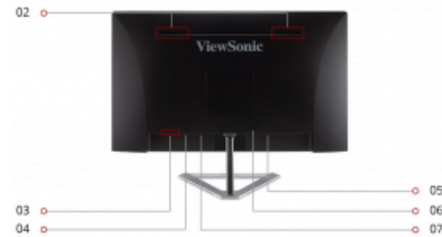


02
 Kensington® Lock Slot
 Audio Out



27"
DISPLAY



IPS
PANEL



3840 x 2160
RESOLUTION

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS
Resolution:	3840 x 2160
Resolution Type:	4K (3840x2160)
Static Contrast Ratio:	1,300:1
Dynamic Contrast Ratio:	80,000,000:1
Light Source:	WLED
Brightness:	350 cd/m2
Colors:	1.07B
Color Space Support:	8-bit+Hi-FRC
Aspect Ratio:	16:9
Response Time (Typical GTG):	14ms
Response Time (GTG w/OD):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30,000
Panel Surface:	Anti-glare, Hard coating (3H)

Compatibility:

PC Resolution (max):	3840 x 2160
----------------------	-------------

Connector:

3.5mm Audio Out(1), HDMI 2.0(2), Display Port(1)

Audio:

Internal Speakers:	2.5W (x2)
--------------------	-----------

Power:

Eco Mode (Conserve):	34W
Eco Mode (optimized):	39W
Consumption (typical):	44W
Consumption (max):	48W
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	0.5W

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Controls:

Physical Controls:	1,2,3,4,Power
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	20-90%

Mount:

VESA Compatible:	100 x 100 mm
------------------	--------------

Video Signal:

Frequency Horizontal:	15 ~ 160 KHz
Frequency Vertical:	40 ~ 75 Hz

Video Input:

Digital Sync:	TMDs for HDMI (v2.0), PCI-E for DisplayPort (v1.2)
---------------	--

Ergonomics:

Tilt (Forward/Back):	3° / 20°
----------------------	----------

Weight (imperial):

Net (lbs):	12.3
Net Without Stand (lbs):	11.0
Gross (lbs):	15.4

Weight (metric):

Net (kg):	5.6
Net Without Stand (kg):	5.0
Gross (kg):	7.0

Dimensions (imperial) (WxHxD):

Packaging (in.):	27.4 x 18.2 x 5.2
Physical (in.):	24.3 x 17.8 x 7.2
Physical Without Stand (in.):	24.3 x 14.4 x 1.8

Dimensions (metric) (WxHxD):

Packaging (mm):	697.0 x 462.0 x 132.0
Physical (mm):	616.0 x 451.0 x 184.0
Physical Without Stand (mm):	616.0 x 366.0 x 46.0

General:

Regulations: MX-CoC, Mexico Energy, CE, CE EMC, CB, Energy Star compliant
 PACKAGE CONTENTS: VX2776-4K, Power Cable, HDMI Cable, Quick Start Guide
 Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.
 Warranty: Three-year limited warranty on parts, labor and backlight
 UPC: 766907995817

Accessories:

CB-00008948, CB-00010555, CB-00010684, CB-00010958, LCD-CMK-001, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001