
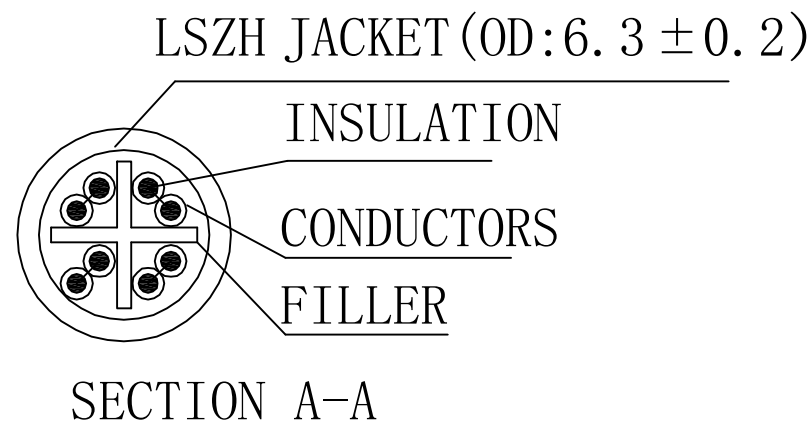


| PIN OUT |     |     |              |
|---------|-----|-----|--------------|
| CN1     |     | CN2 | COLOR        |
| 1       | —○— | 1   | WHITE/ORANGE |
| 2       | —○— | 2   | ORANGE       |
| 3       | —○— | 3   | WHITE/GREEN  |
| 6       | —○— | 6   | GREEN        |
| 4       | —○— | 4   | BLUE         |
| 5       | —○— | 5   | WHITE/BLUE   |
| 7       | —○— | 7   | WHITE/BROWN  |
| 8       | —○— | 8   | BROWN        |



1. 1 ALL COMPONENTS ARE RoHS COMPLIANT.
1. 2 100% OPEN AND SHORT TEST.
1. 3 ALL PRODUCTS PASS TIA CAT 6 CHANNEL TEST
1. 4 TEMPERATURE RANGE: -20—+60℃

| ③   | MOLDING    | 2PCS  | YELLOW PVC                         |
|-----|------------|-------|------------------------------------|
| ②   | CONNECTER  | 2PCS  | RJ45 (8P8C) MALE, GOLD PLATED PINS |
| ①   | CABLE      | 1PCS  | 24AWG*4P+FILLER+YELLOW LSZH JACKET |
| NO. | PARTS NAME | Q' TY | SPECIFICATION                      |

| APPROVED | CHECKED | DRAWN | CUSTOMER: |          |
|----------|---------|-------|-----------|----------|
|          |         |       | ITEM NO.  | TP-611GL |
|          |         |       | DRAW NO.  |          |
|          |         |       | UNIT      | mm       |
|          |         |       | SCALE     | NONE     |

DESCRIPTION:

RJ45 (8P8C) M/M, UTP, CAT6 1.5m

