
Overview

HP Z Display Z34c 34-inch Curved Monitor

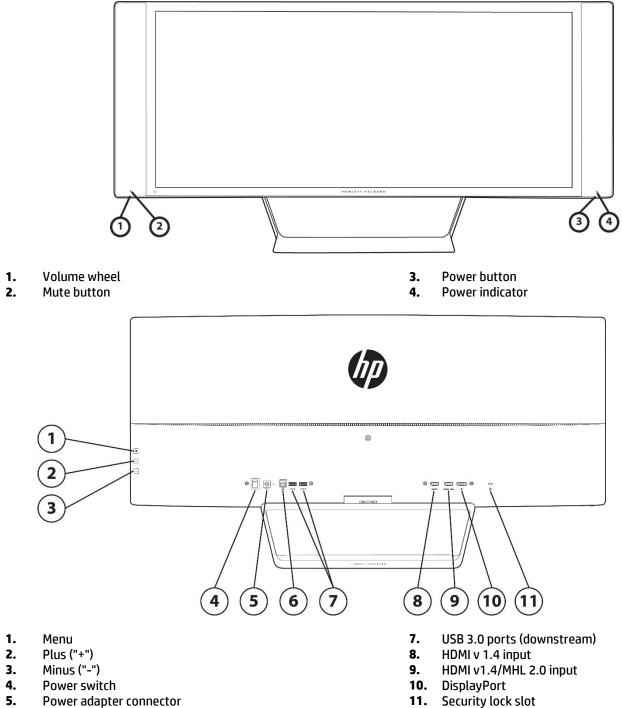


- 6.
- USB 3.0 port (upstream)

(III)

c04593804 — 15230—Worldwide — Version 2— March 30, 2015

Overview

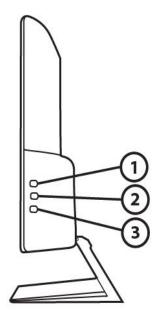

- 1. Menu
- **2.** Plus ("+")
- 3. Minus ("-")

Overview

Raise the bar with the HP Z Display Z34c 34-inch Curved Monitor—an elegant, immersive, curved visual and audio experience for your workstation, PC, and mobile device content.

Key features:

- Enhance your visual perception with a curved display, ultra-high resolution, and 21:9 aspect ratio that increases your field of vision.
- Instantly mirror your smart phone or tablet content and charge your devices through MHL.¹
- The two USB 3.0 ports support BC1.2 for smartphone and tablet charging.
- Maximize your media with wide viewing angles for an expansive visual experience and an outstanding premium audio experience with DTS Audio technology.
- Set the bar for stylish performance with a sleek, modern black-and-silver color palette, thin design, and stellar front of screen features.
- Discover stellar front of screen presentation from 8-bit color depth, 110 PPI and 98.8% sRGB color gamut.
- Get a more expansive view from the super-high 3440 x 1440 WQHD² resolution that puts more pixels on screen.
- Design the screen for how you work with HP Display Assistant software.



Technical Specifications

Models: K1U77A4

Panel	Туре	34-inch VA Curved with LED backlight
	Viewable Image Area	86,36 cm (34 in) widescreen; diagonally measured
	(diagonal)	
	Panel Active Area (W × H)	79,49 x 33,37 cm (31.29 × 13.13 in) at a 3000r* curvature *radius of the arc of the panel curvature in mm
	Resolution	3440 x 1440 @ 60 Hz
	Aspect Ratio	21:9
	Viewing Angle	Up to 178° horizontal/178° vertical typical
	Brightness	350 cd/m ²
	Contrast Ratio (Typical)	3000:1 Static; 10,000,000:1 Dynamic (DCR)
	Response Times*	8 ms typical (G-to-G) with Overdrive; 15 ms typical (G-to-G) without Overdrive
	Pixel Pitch	0.232 mm
	Pixels Per Inch (PPI)	110 DPI
	Backlight Lamp Life (to half brightness)	30,000 hours minimum
	Color Production	Can display up to 16.7 million colors (true 8-bit panel)
	Color Gamut (Typical)	98.8% sRGB (sRGB color space is factory calibrated)
		tions represent the typical specifications provided by HP's component manufacturers; vary either higher or lower.
User Controls	Buttons or Switches	Back - Right side: Menu, Plus ("+"), Minus ("-")
		Bottom right: Power button
	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
	On Screen Display (OSD) User Controls	Brightness, Contrast, Color, Image Control, OSD control, Management, Language, Information, Factory Reset, Input Control
	Audio Controls	Bottom - Left side: Volume wheel with mute, headphone jack
		Remote control also has audio controls
Signal Interface/	Horizontal Frequency	30–80 kHz
Performance	Vertical Frequency	60 Hz
	Native Resolution	3440 x 1440 @ 60 Hz
	Preset Graphic Modes (non-interlaced)	640 x 480 @ 60Hz 800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 1024 @ 60 Hz 1366 x 768 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz



Technical Specifications

		1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz 2560 x 1080 @ 60 Hz 3440 x 1440 @ 30 & 60 Hz		
	Maximum Pixel Clock Speed	250 MHz		
	Anti-Glare	Yes; 2.3% Low Haze, 2H Hardness		
Video/Other Inputs	Plug and Play	Yes		
	Input Connectors	(1) HDMI 1.4, (1) MHL 2.0/HDMI 1.4		
		(1) DisplayPort 1.2		
		HDCP support on all inputs		
	USB	Integrated USB 3.0 hub with (2) down: capability, and (1) upstream port to th	stream ports with BC 1.2 battery charging ne PC	
	Video Cables Included	(1) HDMI 1,8 m (5.9 ft)* (1) DisplayPort 1,8 m (5.9 ft)*		
		*Included cables may vary by country		
	Audio	Input via DisplayPort, HDMI or MHL		
Multimedia	Speakers	2 speakers, 6W per channel, L and R, I	DTS certified	
Power	Power Supply	External		
	Input Power	100 - 240 VAC 50/60 Hz		
	Maximum Power	120 W		
	Typical Power	75 W		
	ES6.0	39 W		
	Sleep Power	0.7 W		
	Off	0.5 W		
	Power Cable Length	1,83 m (6 ft)		
Mechanical	Dimensions (W × D × H)	Unpacked w/stand (lowest setting)	95,08 x 19,72 x 47,71 cm (37.44 x 7.76 x 18.79 in)	
		Unpacked w/o stand (head only)	95,08 x 9,39 x 37,41 cm (37.44 x 3.7 x 14.73 in)	
		Packaged	107,1 x 28,5 x 49,8 cm (42.17 x 11.22 x 19.61 in)	
	Weight	Head Only	8 kg (17.6 lb)	
		Unpacked	9,83 kg (21.63 lb)	
		Packaged	14,98 kg (32.96 lb)	
Ergonomic	Detachable Stand	Yes, ships detached		
Features	Tilt Range	-2° to + 25° vertical		
Environmental	Temperature - Operating	5° to 35° C (41° to 95° F)		
	Temperature - Non- operating	–20° to 60° C (–4° to 140° F)		



Technical Specifications

Humidity - Operating	20% to 80% non-condensing
Humidity - Non- operating	5% to 95%, 38.7° C max wet-bulb
Altitude - Operating	0 to 5,000 m (0 to 16,404 ft)
Altitude – Non- operating	0 to 12,192 m (0 to 40,000 ft)
White LED Backlights	Yes
CCFL Panel	No
Arsenic-Free Display Glass	Yes
Low Halogen ³	Yes (except cables)
Mercury-Free Display Backlighting	Yes



Environmental Data

Eco-Label Certifications & declarations Energy Consumption (in accordance with US	may be labeled IT ECC US EN TCO 6 EPEAT	d with one or more) declaration ERGY STAR [®] .0	of these marks: red in the United States. See ht	to the following approvals and ttp://www.epeat.net for
ENERGY STAR [®] test method)	115VA	C, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation	39.0	•	38.83 W	39.19 W
Sleep	0.7	1 W	0.77 W	0.7 W
Off	0.3	7 W	0.43 W	0.36 W
Heat Dissipation* Normal Operation Sleep Off	134 B 2 BT 1 BT	U/hr U/hr ssipation is calcula	230VAC, 50Hz 133 BTU/hr 3 BTU/hr 1 BTU/hr ated based on the measured w	100VAC, 60Hz 134 BTU/hr 2 BTU/hr 1 BTU/hr atts, assuming the service level
Additional Information	 This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see www.epeat.net</gold> Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. This product contains 2.4% post-consumer recycled plastic (by wt.) This product is 98.2% recycle-able when properly disposed of at end of life. 			
Packaging Materials	External:	PAPER/Corruga	ted	1800 g
	Internal:	PLASTIC/EPE-E	xpanded Polyethylene	1320 g
		PLASTIC/Polyet	hylene low density	45 g
RoHS Compliance	regulations, in Directive. HP's RoHS Directive eliminated (vir RoHS Directive	cluding the Europe goal is to exceed o on a worldwide ba tually = to levels b , except where it is	o compliance with all applicable can Union Restriction of Hazarc compliance obligations by mee asis. By July 1, 2006, RoHS sub elow legal limits) for all HP ele s widely recognized that there comption under the EU RoHS Di	lous Substances (RoHS) ting the requirements of the stances will be virtually ctronic products subject to the is no technically feasible



Environmental Data

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
 - Design packaging materials for ease of disassembly.
 - Maximize the use of post-consumer recycled content materials in packaging materials.
 - Use readily recyclable packaging materials such as paper and corrugated materials.
 - Reduce size and weight of packages to improve transportation fuel efficiency.
 - Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and
RecyclingHewlett-Packard offers end-of-life HP product return and recycling programs in many
geographic areas. To recycle your product, please go to: http://www.hp.com/qo/reuse-recycle
or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or
disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <u>http://www.hp.com/go/recyclers</u>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



Environmental Data

Hewlett-Packard Corporate Environmental Information	For more information about HP's commitment to the environment:
	Global Citizenship Report
	http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html
	Eco-label certifications
	http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.
	<u>html</u>
	ISO 14001 certificates:
	http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagem
	<u>ent.html</u>



Options

Options	HP LCD Monitor Quick Release — Part number EM870AA ⁶	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.
	HP DisplayPort Cable Kit —Part number VN567AA	Connects a DisplayPort connector on an HP Business Desktop computer to a DisplayPort connector on a monitor
	HP Business PC Security Lock Kit — Part number PV606AA	Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.
What's in the box?	Monitor and Accessories	HP Z Display Z34c 34-inch Curved Monitor, AC power cord (1.83m) 6 ft, External Power Supply (150W), Remote Control, HDMI cable (1.8m) 5.9 ft*, DisplayPort cable (1.8m) 5.9 ft* *Included cables may vary by country.
	Documentation	CD (includes user guide, warranty, drivers)
	Software	HP Display Assistant
Other	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Color	Black (Bezel), White (Back of monitor) and Silver (Stand)
	VESA Mounting	VESA mounting via included 100mm x 100mm VESA Bracket
	Security Lock-Ready	Yes
	Country of Origin	China
Certification and Compliance		2, Microsoft WHQL Certification (Windows 8.1 and Windows 7), ENERGY STAR® Qualified, CE, KCC, NOM, TUV-S, TuV-GS, ISC, VCCI, PSB, BSMI, EAC, C-tick, FCC marking, CB, EC1062
Compatibility	Compatible with platfor	ms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty		dard one- or three-year limited warranty (varies by region). Certain restrictions and nal HP Care Pack Services are extended service contracts that extend your protection rranties. ⁵

© Copyright 2015 Hewlett-Packard Development Company, L.P.

ENERGY STAR is a registered mark owned by the U.S. government. For DTS patents, see http://patents.dts.com. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, & DTS and the Symbol together are registered trademarks, and DTS Studio Sound is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved. All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein



Options

should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

- 1. MHL 2.0 port will charge a MHL compatible smart phone and tablet battery. Requires the smart phone or tablet to be enabled for MHL or have an HDMI dongle to connect to the monitor. See your mobile device specifications.
- 2. High-definition content required.
- 3. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
- 4. EPEAT[®] Silver where HP registers commercial display products. See www.epeat.net for registration status in your country.
- 5. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See www.hp.com/qo/cpc for details.
- 6. The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.



Change Log

Chan	ige Log
March 3	30, 2015 Version 1 to 2
	Added
	Added Environmental data chart