
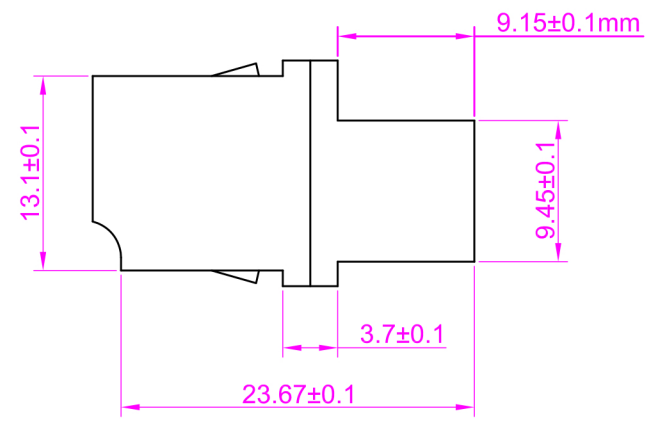
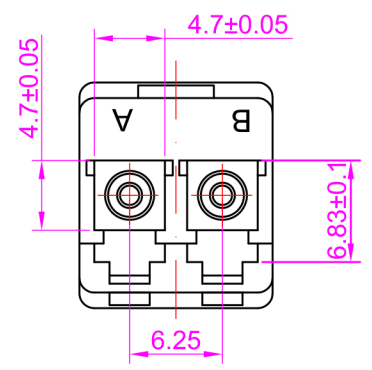


REV	MODIFICATION	UPDATE DATE	SIGNATURE

Unified Line Tolerance	Size Range	Tolerance Range
	0 - 3	±0.05
	>3 - 18	±0.10
	>18 - 50	±0.15
>50	±0.20	

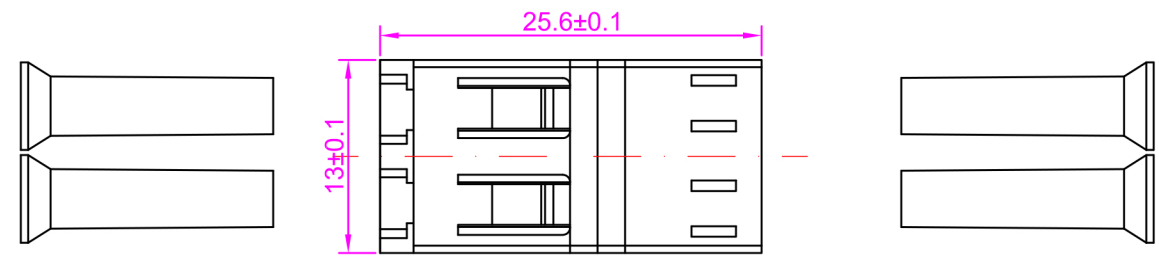

Specification:

1. Adapter: LC Duplex
2. Sleeve: Zirconia Sleeve
3. Dust Cap Color: White
4. Insertion Loss: ≤0.2dB
5. Durability(500 Mating): 0.2dB Max Increase
6. Operating Temperature: -40~+85 degree Celsius



DRAW	DATE	06-06-2018	LC Female to LC Female SMF OS1 Duplex Fiber Optic Adapter			
CHECK	APPROVED	CUSTOMER NO	DWG NO	ADD-ADPT-LCFLCF-SD	REV	A