



# Hot-Swap Capability

In Normal mode, power passes through battery/power module and PDU to equipment.

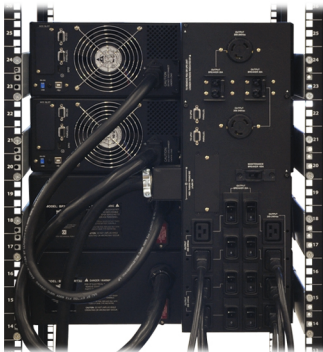

In Bypass mode, power passes directly from PDU to equipment, allowing battery/power module replacement with no downtime.



*Images used as representation of hot-swap capability. Models may vary in appearance and specifications.*