


## Dual DisplayPort KVM Cable Kit - DP, USB, 3.5 mm Audio (3xM/3xM) + DP (M/M), 4K, 4:4:4, 6 ft. (1.83 m), Black

MODEL NUMBER: **P783-006-DP**

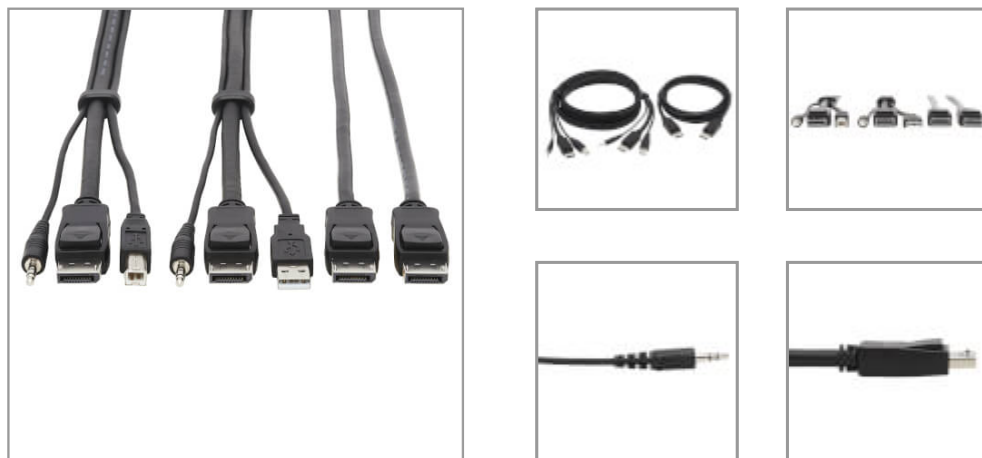

Dual DisplayPort KVM cable kit with DP, USB A/B and 3.5 mm plugs connects your computer to a Tripp Lite B002-DP2A4 or other compatible NIAP KVM.

### Features

**6-ft. (1.83 m) Cables Connect Your Computer and 2 DisplayPort Monitors to a NIAP KVM** This DisplayPort cable kit includes two 6-foot cables for connecting a computer with two monitors to a KVM switch. The P783-006 features DisplayPort, USB A/B and 3.5 mm audio connectors on both ends for connecting your computer to a KVM switch. The P580-006 is a DisplayPort cable with male connectors on each end.

**Specifically Designed for Select KVMs to Save You Time and Money** Recommended for the NIAP KVM Series. The cables support DisplayPort video resolutions up to 3840 x 2160 (4K x 2K) at 60 Hz with true 4:4:4 chroma subsampling. They are compatible with HDCP 2.2 and DisplayPort 1.2 standards. The P783-006 also supports USB 2.0 data transfer speeds up to 480 Mbps. By combining several different cables into one convenient kit, you cut down on unnecessary clutter and save money.

### Highlights

- Cuts cable clutter and saves money by combining essential KVM cables into just 2
- Includes 6-ft. (1.83 m) DisplayPort cable and 6-ft. (1.83 m) 3-in-1 DP, USB and 3.5 mm audio cable
- Delivers UHD picture quality at resolutions up to 3840 x 2160 (4K x 2K) @ 60 Hz
- Supports true 4:4:4 chroma subsampling to meet latest color standards
- Plug-and-play operation with no software required for easy, immediate installation

### Applications

- Connect a headless computer with dual displays to a Tripp Lite KVM switch
- Upgrade or replace worn or lost KVM cables
- Eliminate clutter and save money by replacing multiple cables with one new kit
- Extend the distance between the KVM switch and computer to 6-ft. (1.83 m)

### System Requirements

- B002-DP2A4 NIAP KVM or other compatible KVM switch

### Package Includes

- P783-006 DisplayPort KVM cable kit, 3 in 1 (M/M), 6-ft. (1.83 m)
- P580-006 DisplayPort monitor cable (M/M), 6-ft. (1.83 m)

## Specifications

| OVERVIEW        |                        |
|-----------------|------------------------|
| UPC Code        | 037332241634           |
| Accessory Type  | Cable Kit              |
| Technology      | DisplayPort            |
| Accessory Class | KVM Switch Accessories |
| VIDEO           |                        |



Powering Business Worldwide

TRIPP LITE  
SERIES

|                                      |                                                |
|--------------------------------------|------------------------------------------------|
| Max Supported Video Resolution       | 3840 x 2160 @60Hz                              |
| <b>CONNECTIONS</b>                   |                                                |
| Side A - Connector 1                 | 3.5MM (MALE); DISPLAYPORT (MALE); USB A (MALE) |
| Side A - Connector 2                 | DISPLAYPORT (MALE)                             |
| Side B - Connector 1                 | 3.5MM (MALE); DISPLAYPORT (MALE); USB B (MALE) |
| Side B - Connector 2                 | DISPLAYPORT (MALE)                             |
| Contact Plating                      | Gold                                           |
| <b>PHYSICAL</b>                      |                                                |
| Color                                | Black                                          |
| Cable Jacket Color                   | Black                                          |
| Cable Length (ft.)                   | 6                                              |
| Cable Length (m)                     | 1.83                                           |
| Cable Length (in.)                   | 72                                             |
| Shipping Dimensions (hwd / in.)      | 1.25 x 10.10 x 12.50                           |
| Shipping Dimensions (hwd / cm)       | 3.18 x 25.65 x 31.75                           |
| Shipping Weight (lbs.)               | 0.80                                           |
| Shipping Weight (kg)                 | 0.36                                           |
| Unit Dimensions (hwd / in.)          | 0.000 x 0.000 x 0.000                          |
| <b>ENVIRONMENTAL</b>                 |                                                |
| Operating Temperature Range          | 14° to 122°F (-10° to 50°C)                    |
| Storage Temperature Range            | 5° to 140°F (-15° to 60°C)                     |
| Relative Humidity                    | 0-90% non-condensing                           |
| <b>FEATURES &amp; SPECIFICATIONS</b> |                                                |
| USB Specification                    | USB 2.0 (up to 480 Mbps)                       |
| Displayport Specification            | 1.2                                            |
| HDCP Specification                   | 2.2                                            |
| <b>STANDARDS &amp; COMPLIANCE</b>    |                                                |
| Product Compliance                   | RoHS                                           |
| <b>WARRANTY &amp; SUPPORT</b>        |                                                |
| Product Warranty Period (Worldwide)  | Lifetime limited warranty                      |



*Powering Business Worldwide*

TRIPP LITE  
SERIES

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.