


Overview

HP ZGX Nano G1n AI Station



Front View

Overview

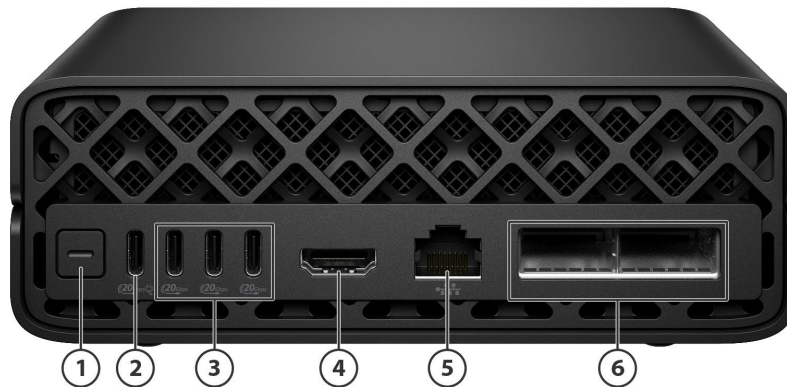

Rear View

1. Power button
2. 1x USB Type-C (USB-C) power connector (240W)
3. 3x USB 3.2 Type-C (USB-C) 20Gbps (supports Alt mode DisplayPort 1.4a; total output power 30W)
4. 1x HDMI 2.1a
5. 1x RJ-45 10Gbps
6. 2x QSFP 200Gbps

Overview

Form Factor	Mini
Operating System	NVIDIA DGX™ OS 7 / Ubuntu 24.04 NOTE: This product does not support Microsoft Windows.
Color	Black
Processor	NVIDIA GB10 Grace Blackwell Superchip Blackwell Architecture GPU 20 core Arm, 10 Cortex-X925 + 10 Cortex-A725 CPU Blackwell Generation CUDA Cores 5th Generation Tensor Cores 4th Generation RT Cores 1x NVEC 1x NVDEC
Memory	128GB LPDDR5x, coherent unified system memory, 16 channels, soldered-down
Memory Bandwidth	273 GB/s
Internal I/O	Internal Slot M.2-M: 1 PCIe Gen5 x4
Rear I/O	1x USB Type-C (USB-C) power connector (240W); 3x USB 3.2 Type-C (USB-C) 20Gbps (total output power 30W); 1x HDMI 2.1a; 1x RJ-45 10Gbps; 2x QSFP 200Gbps
Chassis Dimensions (H x W x D)	H (without feet): 2.01" (5.1cm) H (with feet): 2.1" (5.45cm) W: 5.9" (15cm) D: 5.9" (15cm) (Standard desktop orientation)
Packaged Dimensions (H x W x D)	L: 8.5" (21.6cm) W: 5.6" (14.2cm) H: 10.7" (27.2cm)
Rack Dimensions	NOTE: This product is neither supported nor qualified for rack mounting.
Weight	Exact weights depend upon configuration (System weight only). Starting at 1.25kg (2.76lbs.) Exact weights depend upon configuration (Packaged weight). Starting at 2.5kg (5.4lbs.)
Power Adapter	240W external USB Type-C power adapter, 89% efficiency, active PFC NOTE: This product does not include a keyboard or mouse.



Supported Components

Processors		Factory Configured	Option Kit
NVIDIA Grace Blackwell			
NVIDIA GB10 Grace Blackwell Superchip		Y	N

PCIe Solid State Drives		Factory Configured	Option Kit
HP 1TB PCIe-4x4 2242 NVMe SED OPAL Value TLC M.2 SSD		Y	N
HP 4TB PCIe-4x4 2242 NVMe SED OPAL Value TLC M.2 SSD		Y	N

Memory		Factory Configured	Option Kit
128GB LPDDR5x coherent unified system memory		Y	N

Networking and Communications		Factory Configured	Option Kit	Option Kit Part Number
HP ZGX 0.4m QSFP112 Ethernet DAC Cable		Y	Y	C20MQAA

Keyboard/Mouse		Factory Configured	Option Kit	Option Kit Part Number
HP 425 Programmable Bluetooth Wireless Mouse		N	Y	7M1D5AA
HP 695 Qi-Charging Bluetooth Wireless Mouse		N	Y	8F1Y4AA
HP 705 Rechargeable Wireless Mouse		N	Y	AZ7B1AA
HP 720 Multi-Device Rechargeable Wireless Keyboard and Mouse Combo		N	Y	9T5A9AA
HP 725 Multi-Device Rechargeable Wireless Keyboard		N	Y	9T5B2AA
HP 925 Ergonomic Vertical Bluetooth 5.0 + Wireless 2.4GHz Wireless Mouse		N	Y	6H1A5AA
HP Multi-Device Dual-Mode Keyboard 495K		N	Y	BD5F5AA



Supported Components

Power	Factory Configured	Option Kit	Option Kit Part Number
HP ZGX 240W USB-C AC Adapter	Y	Y	TBD

Input/Output - Adapter	Factory Configured	Option Kit	Option Kit Part Number
HP USB-C to DisplayPort Adapter G2	N	Y	8Y8Y1AA
HP USB-C to HDMI Adapter	N	Y	4SH07AA
HP USB-C to VGA Adapter	N	Y	4SH06AA

Operating Systems	NVIDIA DGX™ OS 7 / Ubuntu 24.04 NOTE: This product does not support Microsoft Windows.
--------------------------	--



System Technical Specifications

SOFTWARE COMPONENTS AND APPLICATIONS PREINSTALLED WITH NVIDIA DGX OS

- NVIDIA Connect
- CUDA 13
- NVIDIA RTX Driver 580
- DGX Dashboard
- NVIDIA AI Workbench

System Board

System Board Form Factor 140mm X 122.455 mm

Processor 2970 Ball BGA

Embedded Controller Microchip

Memory Type Supported LPDDR5x, coherent unified system memory, 16 channels, soldered-down

Memory Speed Supported 8533 MHz

Memory Bandwidth 273 GB/s

Maximum Memory 128GB

Memory Configuration (Supported) 128GB

Supported Interfaces	Integrated Graphics	NVIDIA Blackwell Architecture (GB10) 1x HDMI 2.1a port and 3x USB 3.2 Type-C (USB-C) 20Gbps ports; USB 3.2 Type-C (USB-C) ports support Alt mode DisplayPort 1.4a with display resolutions limited to 4K (3840 x 2160) @ 120Hz, 5K (5120 x 2880) @ 60Hz, and 8K (7860 x 4320) @ 30Hz. The HDMI 2.1a port can be used for higher resolutions or refresh rates.
	Network Controller	Realtek RTL8127-CG 10GbE Ethernet Controller NVIDIA Mellanox ConnectX-7 200GbE Ethernet Controller
USB Connector(s)	Rear	1x USB Type-C power connector (240W); 3x USB 3.2 Type-C (USB-C) 20Gbps (supports Alt mode DisplayPort 1.4a; total output power 30W)
Integrated Audio	Yes	



System Technical Specifications

Display Connectors	HDMI 2.1a
Flash ROM	Yes
System Fan Header	Yes
Front PCI Fan Header	None
Front Control Panel/Speaker Header	None
CMOS Battery Holder – Lithium	Y
Integrated Trusted Platform Module	Integrated TPM 2.0 Convertible to FIPS 140-2 Certified mode The TPM module disabled where restricted by law
Keyboard/Mouse	NOTE: This product does not include a keyboard or mouse.
Power Supply	240W external USB Type-C power adapter, 89% efficiency, active PFC

System Configurations

<i>HP ZGX Nano G1n Configuration #1</i>	Processor Info	NVIDIA GB10 Grace Blackwell Superchip
	Memory Info	128GB LPDDR5x, coherent unified system memory
	Graphics Info	Integrated graphics
	Disks/Optical/Floppy	1x 1TB PCIe 2242 Val M.2 SSD
	Power Supply	240W external USB Type-C power adapter, 89% efficiency, active PFC

Energy Consumption (Watts)	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows long Idle (S0)	TBD		TBD		TBD	
Windows short Idle (S0)	TBD		TBD		TBD	
Windows Busy Typ (S0)	TBD		TBD		TBD	
Windows Busy Max (S0)	TBD		TBD		TBD	
Sleep (S3)	TBD	TBD	TBD	TBD	TBD	TBD
Off (S5)	TBD	TBD	TBD	TBD	TBD	TBD
Zero Power Mode (ErP)	TBD		TBD		TBD	

Heat Dissipation (Btu/hr)	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
Windows long Idle (S0)	TBD		TBD		TBD	
Windows short Idle (S0)	TBD		TBD		TBD	
Windows Busy Typ (S0)	TBD		TBD		TBD	
Windows Busy Max (S0)	TBD		TBD		TBD	
Sleep (S3)	TBD	TBD	TBD	TBD	TBD	TBD



System Technical Specifications

	Off (S5)	TBD	TBD	TBD	TBD	TBD	TBD
	Zero Power Mode (ErP)	TBD		TBD		TBD	

HP ZGX Nano G1n Configuration #2	Processor Info	NVIDIA GB10 Grace Blackwell Superchip
	Memory Info	128GB LPDDR5x, coherent unified system memory
	Graphics Info	Integrated graphics
	Disks/Optical/Floppy	1x 4TB PCIe 2242 Val M.2 SSD
	Power Supply	240W external USB Type-C power adapter, 89% efficiency, active PFC

Energy Consumption (Watts)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows long Idle (S0)	TBD		TBD		TBD	
	Windows short Idle (S0)	TBD		TBD		TBD	
	Windows Busy Typ (S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	TBD		TBD		TBD	
	Sleep (S3)	TBD	TBD	TBD	TBD	TBD	TBD
	Off (S5)	TBD	TBD	TBD	TBD	TBD	TBD
	Zero Power Mode (ErP)	TBD		TBD		TBD	

Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
	Windows long Idle (S0)	TBD		TBD		TBD	
	Windows short Idle (S0)	TBD		TBD		TBD	
	Windows Busy Typ (S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	TBD		TBD		TBD	
	Sleep (S3)	TBD	TBD	TBD	TBD	TBD	TBD
	Off (S5)	TBD	TBD	TBD	TBD	TBD	TBD
	Zero Power Mode (ErP)	TBD		TBD		TBD	

Operating Voltage Range 90-264 VAC

Rated Voltage Range 100-120 VAC
200-240 VAC

Rated Line Frequency 50-60 Hz

Operating Line Frequency Range 47-63 Hz

Rated Input Current 100-120 VAC; 3.1A
200-240 VAC; 1.56A

Heat Dissipation Typical: 896.51 btu/hr (225.92 kcal/hr)
Maximum: 1117.14 btu/hr (281.519 kcal/hr)



System Technical Specifications

Declared Noise Emissions

System Configuration (Entry level)	Processor Info	NVIDIA GB10 Grace Blackwell Superchip	
	Memory Info	128GB LPDDR5x, coherent unified system memory	
	Disks/Optical	1x 1TB PCIe 2242 Val M.2 SSD	
	Power Supply	240W external USB Type-C power adapter, 89% efficiency, active PFC	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	TBD	TBD
	Hard drive Operating (random reads)	TBD	TBD
	Hard drive Operating (active mode)	TBD	TBD

Environmental Requirements

Temperature	Operating: 5° to 35° C (40° to 95° F) Above 1524 m (5,000 feet) altitude, the maximum operating temperature is reduced by 1° C (1.8° F) for every 305 m (1,000 feet) increase in elevation Non-operating: -30° to 60° C (-22° to 140° F) Maximum rate of change: 10°C/hr
Humidity	Operating: 8% to 85% RH, non- condensing, 35° C maximum wet bulb Non-operating: 8% to 90% RH, non-condensing, 35° C maximum wet bulb



System Technical Specifications

Physical Security and Serviceability

Access Panel	#1 Phillips screwdriver is needed for top and bottom panel
Memory	Soldered Down
System Board	Screw-In
CPUs and Heatsinks	#1 Phillips screwdriver is needed to remove the heatsink
Rear Power Button	Yes
System/Emergency ROM Flash Recovery	Recovers corrupted system BIOS.
Cooling Solution	Air cooled forced convection
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none">• Allows the system to wake from a low power mode.• Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
Flash ROM	Yes
CMOS Battery Holder	Yes

System Technical Specifications

BIOS

BIOS 64-bit Services	BIOS supports 64-bit Operating systems.
PCI 4.0 Support	Full BIOS support for PCI Express through industry standard interfaces.
ROM Based Computer Setup Utility (F10)	AMI standard BIOS setup
Boot Control	Disables the ability to boot from removable media on supported devices.
Ownership Tag	None
Remote Wakeup/Remote Shutdown	None
Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system.
ROM revision levels	Reports the system BIOS revision level in Computer Configuration Utility. Version is available through an industry standard interface so that management SW applications can use and report this information.
Keyboard-less Operation	The system can be booted without a keyboard.
Asset Tag	The user or MIS to set a unique tag string in non-volatile memory.
UEFI Specification	
Revision	2.8
ACPI	Advanced Configuration and Power Management Interface, Version 6.0
xHCI	eXtensible Host Controller Interface for Universal Serial Bus, Revision 1.2
PCI	PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft .7
PCI Express	PCI Express Base Specification, Revision 3.0 PCI Express Base Specification, Revision 4.0
TPM	Trusted Computing Group TPM Specification Version 2.0 Common Criteria EAL4+ certified. FIPS 140-2 Certification TCG TPM Certified products list: http://www.trustedcomputinggroup.org/certification/tpm-certified-products/
USB	Universal Serial Bus Revision 1.1 Specification Universal Serial Bus Revision 2.0 Specification Universal Serial Bus Revision 3.2 Specification Universal Serial Bus Revision 4.0 Specification
SMBIOS	System Management BIOS Reference Specification, Version 3.4 External BIOS simulator found at: http://csrsml.itcs.hp.com/



System Technical Specifications

Warranty

HP Customer Support: One-year hardware limited warranty in most regions; Optional HP Care Packs¹ are available and are extended service contracts that go beyond your standard limited warranties; for more details visit <http://www.hp.com/go/cpc>

¹HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit www.hp.com/go/cpc. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

Certification and Compliance

Environmental Sustainability questions concerning:

- Ecolabels
- California Energy Commission (CEC)
- Compliance with Environmental legislation (EU ErP, China CECP, EU RoHS and other countries)
- Supply Chain Social Environmental Responsibility (SER) (conflict minerals; human rights, etc.)
- Product specific environmental features (material content, packaging content, recycled content, etc.)
- China Energy Label (CEL)

Please contact sustainability@hp.com

For country specific Regulatory Compliance approval documents or Regulatory and Safety questions concerning:

- Declarations of Conformity (for self-service, go to https://www.hp.com/uk-en/certifications/technical/regulations-certificates.html?jumpid=ex_r135_uk/en/any/corp/hpuk-mu_chev/certificates)
- GS Certificates
- Product Safety Certificates (UL, CB, BIS, etc.)
- EMC Certificates, Declarations of Conformity, or Certificates of Conformity (CE, FCC, ICES, etc.)
- CCC Certificates
- Ergonomics

Please contact techregshelp@hp.com

Social and Environmental Responsibility

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- California Energy Commission (CEC) – Small Scale Servers
- Japan PC Green label*
- Japan Top Runner
- Australia and New Zealand MEPS



System Technical Specifications

Sustainable Impact Specifications

- [Product Carbon Footprint](#)
- At least 25% ITE-Derived closed loop plastic¹
- 40% post-consumer recycled plastic¹
- 20% recycled steel²
- 75% recycled aluminum²
- 100% of HP paper-based packaging is from recycled or certified sustainable sources³

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Workstation model is based on a “Typically Configured Workstation”.

Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	TBD	TBD	TBD
Normal Operation (Long idle)	TBD	TBD	TBD
Sleep	TBD	TBD	TBD
Off	TBD	TBD	TBD

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	TBD	TBD	TBD
Normal Operation (Long idle)	TBD	TBD	TBD
Sleep	TBD	TBD	TBD
Off	TBD	TBD	TBD

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is



System Technical Specifications

attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (L_{WAd} , bels)	Sound Pressure (L_{pAm} , decibels)
Typically Configured – Idle	TBD	TBD
Fixed Disk – Random writes	TBD	TBD
Optical Drive – Sequential reads	TBD	TBD

Longevity and Upgrading

This product cannot be upgraded.

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680.1 (EPEAT) standard at the Gold level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product is 96.8% recycle-able when properly disposed of at end of life.

Packaging Materials

External:	PAPER/Corrugated	327 g
Internal:	PLASTIC/Polyethylene low density – LDPE	6 g

The plastic packaging material contains at least 30% recycled content.

The corrugated paper packaging materials contains at least 93.0% recycled content.

RoHS Compliance

HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam.

We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products.

We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve.

To obtain a copy of the HP RoHS Compliance Statement, see [HP RoHS position statement](#).



System Technical Specifications

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

<https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c05998906>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Bis(2-Ethylhexyl) phthalate (DEHP)
- Benzyl butyl phthalate (BBP)
- Dibutyl phthalate (DBP)
- Diisobutyl phthalate (DIBP)
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

HP offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to:

<https://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c05403198>

or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.



System Technical Specifications

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: [HP Product Disassembly Instruction Website](#). These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

HP Inc. Corporate Environmental Information

For more information about HP's commitment to the environment:

- Sustainable Impact Report
 - <https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06040843>
- Eco-label certifications
 - https://www.hp.com/us-en/sustainable-impact/document-reports.html#filters_documents_reports-=document_type-type_energy_star,type_epeat,type_tcoISO
- ISO 14001 certificates
 - <https://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c04777932>

Footnotes

1. Recycled plastic is expressed as a percentage of the total weight plastic. Post-consumer recycled is based on the definition set in the EPEAT standard for computers, IEEE 1680.1-2018 standard.
2. Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for metal parts over 25 grams.
3. HP paper and fiber-based packaging for PCs, displays, home and office print, and supplies is reported by suppliers as recycled or certified, with a minimum of 97% by volume verified by HP. Packaging is the box that comes with the product and all paper-based materials inside the box. Packaging for personal systems accessories and spare parts is not included. Plastic cushions are made from >90% recycled plastic.

Technical Specifications - Storage Drives

STORAGE

PCIe SSDs for HP ZGX Nano G1n AI Station

HP M.2 2242 PCIe-4X4 1TB SED Value TLC PCIe SSD	Capacity	1TB
	Protocol	PCIe
	Form Factor	M.2 in native slot on motherboard
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	600TBW (TB Written)
	Reliability	1.5M Hours
	Interface	PCI Express 4.0 x4 electrical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	7000MB/s*
	Sequential Write	6000MB/s*
	Random Read	950K IOPS*
	Random Write	950K IOPS*

*Actual performance may vary.

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

HP M.2 2242 PCIe-4X4 4TB SED Value TLC PCIe SSD	Capacity	4TB
	Protocol	PCIe
	Form Factor	M.2 in native slot on motherboard
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	2400TBW (TB Written)
	Reliability	1.5M Hours
	Interface	PCI Express 4.0 x4 electrical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	7000MB/s*
	Sequential Write	6000MB/s*
	Random Read	950K IOPS*
	Random Write	1400K IOPS*

*Actual performance may vary.

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.



Technical Specifications - Networking and Communications

NETWORKING / COMMUNICATION (Onboard)

Realtek RTL8127-CG (Integrated)	Connector	RJ-45 (Single Port)
	Cabling	Twisted Pair Cabling, up to 100 meter, 10GbE on CAT6 or CAT6a, 5GbE & 2.5GbE on CAT 5e UTP and up, 1 GbE/10Mbps on CAT 5 UTP and up
	Controller	Realtek RTL8127-CG 10GbE LAN networking controller
	Data Rates Supported	10/100/1000 M/2.5G/5G/10Gbps
	Compliance	802.1as/1588, 802.1p, 802.1Q, 802.3, 802.3ab, 802.1ad, 802.3az, 802.3x, 802.3bz
	Bus Architecture	PCI Express
	Boot ROM Support	Yes
	Network Transfer Mode	Full-duplex; Half-duplex
	Network Transfer Rate	10G BASE-T Full-Duplex 5G BASE-T Full-Duplex 2.5G BASE-T Full-Duplex 1000BASE-T Full-Duplex 100BASE-TX Full-Duplex 100BASE-TX Half-Duplex 10BASE-T Full-Duplex 10BASE-T Half-Duplex
	Management Capabilities	WOL, PXE, UEFI,
NVIDIA ConnectX-7 (Integrated)	Connector	2x QSFP112 form factor
	Cabling	QSFP112 400G DAC Cable, 400mm, 30AWG
	Controller	NVIDIA CX07-V000S4N04C 200GbE networking controller
	Data Rates Supported	Ethernet 200Gbps per port.
	Compliance	802.3ck
	Bus Architecture	PCI Express
	Boot ROM Support	Yes
	Network Transfer Mode	Full-duplex; Half-duplex
	Network Transfer Rate	200Gbps

Technical Specifications - Networking and Communications

MediaTek Wi-Fi 7 MT7925 802.11be AIM-T BT 5.4 (Integrated)	WLAN Standards	IEEE 802.11 a/b/g/n/ac/ax/be compliant Support 20/40 MHz bandwidth in 2.4 GHz band Support 20/40/80/160 MHz bandwidth in 5 GHz band and 6 GHz band Support MU-MIMO Security support for WPA WMM, WMM PS, WPA WPA/WPA2/WPA3 personal / enterprise, WPS2.0, FIPS
	Antenna	2x2 Dual-Band
	Bluetooth Standards	5.4



Date of change	Version History		Description of change
	From v1 to v2		

© Copyright 2025 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Core, Thunderbolt and Intel vPro are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. USB Type-C® and USB-C® are trademarks of USB Implementers Forum. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

