


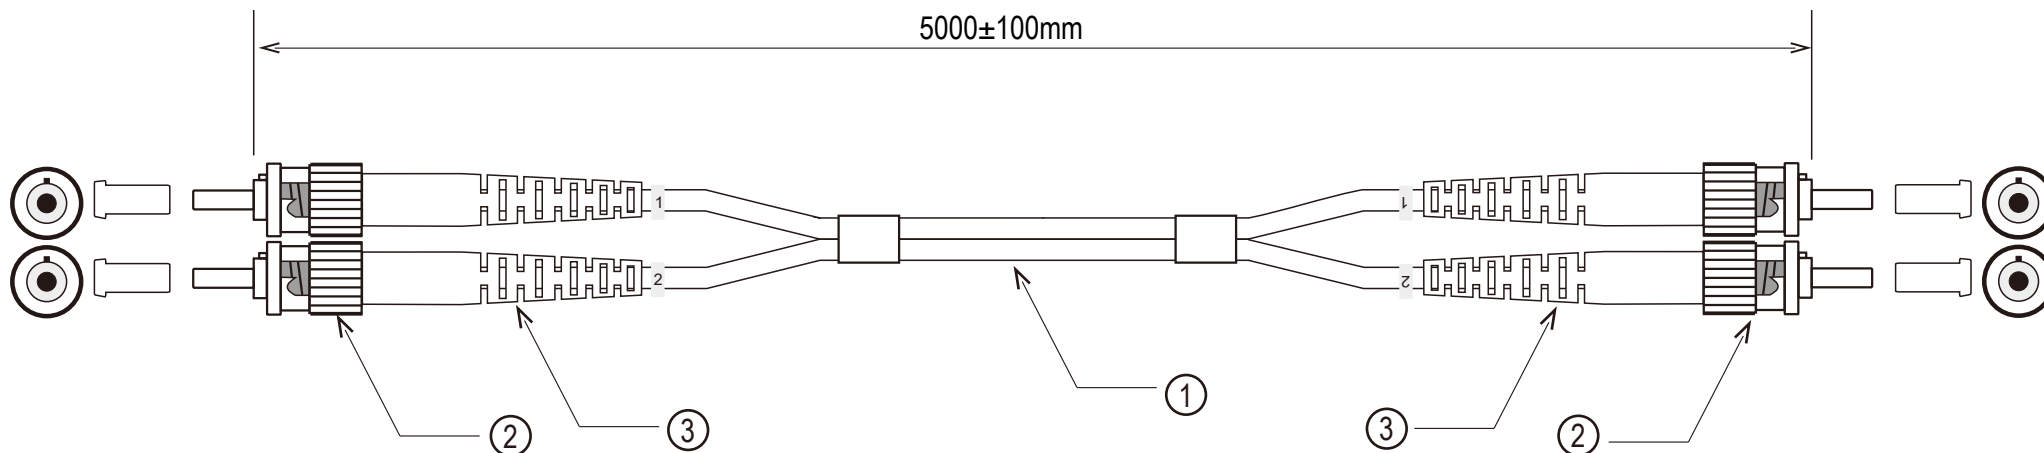

NOTE:

ALL FIBER CABLE ARE TESTED BY INSERTION LOSS/RETURN LOSS TEST STATION AND INTEGRATED OPTICAL FIBER END FACE INSPECTION EXPERTS

Specifications

Insertion Loss(dB)	≤ 0.3
Return Loss(dB)	≥ 35
Plug Housing Color	Matel
Boot Color	Black
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	-30~+85
Operating Wavelength(mm)	850

③	BOOT	2PCS	Black
②	PLUG	2PCS	ST/UPC-ST/UPC,Matel
①	CABLE	1PCS	Φ2.0mm 6 2.5/125 OM1 LSZH (orange)
NO.	PARTS NAME	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	FB-35
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

PATCHCORD,ST/UPC-ST/UPC
DX,62.5/125 OM1,LSZH

