

# EB-L695SE



## Professional short throw projector with ultimate reliability and low maintenance

Designed for compact spaces, the EB-L695SE short-throw offers 6,000 lumens of bright WUXGA resolution with 4K Enhancement, HDR and advanced installation features. With up to 30,000 hours of maintenance-free projection in Eco mode, lens shift, 1.4x zoom and corner focus, it's ideal for professional applications. Flexible control options are available via HDBaseT, LAN and more.

### Awe-inspiring immersive short throw projector

Create stunning, shadow-free presentations in compact spaces with a short throw ratio of 0.5–0.7:1, built-in lens shift, and WUXGA resolution with 4K Enhancement. With 1.4x optical zoom, corner focus, and display sizes up to 500", this high-performance display is perfect for immersive applications. Its compact design, low noise, and sleek black chassis ensure crystal-clear images in any setting, all at an affordable price.

### Flexible installation for professional setups

Designed for easy installation, the EB-L695SE can be quickly configured for optimal performance in any room layout. Features like lens shift, horizontal and vertical keystone correction, and 360° projection ensure precise image positioning. Options such as split-screen capabilities, edge blending, and geometry correction, along with the optional ELPEC01 camera and Epson Projector Professional Tool, enable fast setup and calibration, enhancing flexibility for complex setups.

### Stream, share, and connect with ease

With optional wireless connectivity, a USB-A port for PC-free operation, and HDBaseT/HDMI daisy chaining, the EB-L695SE enhances installation flexibility and convenience.

### Smart control for seamless experience

The EB-L695SE streamlines large-scale deployments with NFC functionality and the Epson Projector Config Tool. The intuitive OSD menu, coupled with Epson's EPMC solution, enables effortless cloud monitoring and management. Fully compatible with Crestron XiO Cloud, it offers centralised control for seamless operation.


### Peace of mind with high durability and support

Engineered for long-lasting performance, the EB-L695SE features fit-and-forget laser technology, backed by a 3-year warranty. It minimises maintenance needs, reduces downtime, and offers peace of mind with Epson's renowned after-sales support.

### Environmentally friendly design

Built with sustainability in mind, our projectors are manufactured using 100% renewable electricity\* and packaged in 100% recyclable cardboard. With low maintenance and energy consumption and benefits from end-of-life recycling and energy recovery services across Europe.

## DATASHEET / BROCHURE

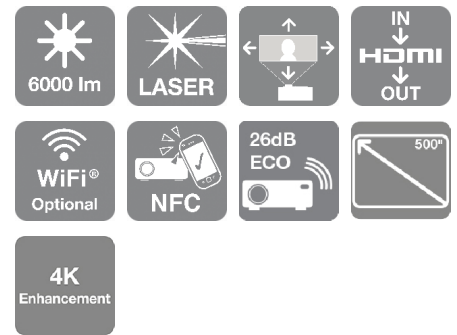

## KEY FEATURES

- **6,000 lumens brightness with 4K Enhancement technology at 60Hz**  
Delivering sharp, bright images with up to 4.6 million pixels, this budget-friendly laser projector is perfect for large displays in professional spaces.
- **Compact short-throw design for immersive display**  
Project scalable images up to 500" with a short throw ratio of 0.5–0.7:1 and 1.4x zoom, creating immersive, shadow- and glare-free visuals in compact spaces.
- **Quiet operation**  
Delivers high-performance display at a low noise level of 36dB or 26dB in Eco mode, ensuring a quiet and focused environment for immersive visual experiences.
- **Effortless, flexible installation**  
A fixed centre lens with manual lens shift and advanced features like corner focus adjustment ensures easy setup and adaptability for any environment.
- **Advanced installation tools**  
Includes a range of free software tools and an optional external camera module for enhanced setup flexibility.
- **Making sustainable choices with Epson**  
Made from 19% recycled plastics, low power consumption, reduced packaging and a usage life of up to 30,000 hours in Eco mode (20,000 hours normal).
- **Legal Statement**  
Complies with The UK Product Security and Telecommunications Infrastructure (Product Security) requirements. Epson will provide security updates for 7 years from purchase

## PRODUCT SPECIFICATIONS

### TECHNOLOGY

|                   |                                             |
|-------------------|---------------------------------------------|
| Projection System | 3LCD Technology, RGB liquid crystal shutter |
| LCD Panel         | 0.67 inch with C2 Fine                      |

### IMAGE

|                         |                                                                       |
|-------------------------|-----------------------------------------------------------------------|
| Color Light Output      | 6,000 Lumen- 4,200 Lumen (economy) In accordance with IDMS15.4        |
| White Light Output      | 6,000 Lumen - 4,200 Lumen (economy) In accordance with ISO 21118:2020 |
| Resolution              | WUXGA                                                                 |
| Resolution Enhancement  | 4K enhancement                                                        |
| Aspect Ratio            | 16:10                                                                 |
| Contrast Ratio          | Over 5,000,000 : 1                                                    |
| Light source            | Laser                                                                 |
| Laser Light source      | 20,000 hours Durability High, 30,000 hours Durability Eco             |
| Keystone Correction     | Manual vertical: $\pm 30^\circ$ , Manual horizontal $\pm 30^\circ$    |
| Colour Video Processing | 10 Bits                                                               |
| Colour Reproduction     | Upto 1.07 billion colours                                             |

### OPTICAL

|                               |                                                      |
|-------------------------------|------------------------------------------------------|
| Throw Ratio                   | 0.50 - 0.70:1                                        |
| Zoom                          | Manual, Factor:1 - 1.4                               |
| Lens                          | Optical                                              |
| Lens Shift                    | Manual - Vertical $\pm 50\%$ , horizontal $\pm 20\%$ |
| Screen Size                   | 100 inches - 500 inches                              |
| Projection Distance Wide      | 1.1 m - 5.6 m                                        |
| Projection Distance Tele      | 1.5 m - 7.8 m                                        |
| Projection Distance Wide/Tele | 1.09 m - 7.84 m                                      |
| Projection Lens F Number      | 1.8 - 2                                              |
| Projection Lens Focal Length  | 7.54 mm - 10.55 mm                                   |
| Projection Lens Focus         | Manual                                               |

### CONNECTIVITY

|                  |                                                                                                                                                                                                                                             |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interfaces       | USB 2.0-A (2x), USB 2.0 Type B (Service Only), RS-232C, Ethernet interface (100 Base-TX / 10 Base-T), Wireless LAN IEEE 802.11a/b/g/n/ac (optional), HDMI out, HDBaseT, Jack plug out, HDMI (HDCP 2.3) (2x), Near Field Communication (NFC) |
| Network Protocol | HTTPS, SNMP, ESC/VP.net, PJLink                                                                                                                                                                                                             |

### ADVANCED FEATURES

|                   |                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Security          | Kensington lock, Control panel lock, Padlock, Security cable hole, Wireless LAN unit lock, Password protection                                                                                                                                                                                                                                                                      |
| 2D Colour Modes   | Dynamic, Natural, Cinema, Presentation, DICOM SIM                                                                                                                                                                                                                                                                                                                                   |
| Other features    | 21:9 aspect ratio support, 4K enhancement, A/V mute, Auto Power On, Customizable user logo, Direct Power on/off, Document Camera Compatible, Edge Blending, Home Screen, JPEG Viewer, Network projection, OSD copy function, PC Free, Point correction, Quick Corner, Schedule Function, Split-Screen-Function, Ultra-wide display (16:6), Web Control, Web Remote, iProjection App |
| Video Color Modes | Cinema, Dynamic, Natural, Presentation, DICOM SIM, Multi Projection, BT709                                                                                                                                                                                                                                                                                                          |
| Projector control | via: Crestron Integrated Partner, Extron XTP, AMX Device Discovery                                                                                                                                                                                                                                                                                                                  |

## EB-L695SE

## WHAT'S IN THE BOX

- Main unit
- Power cable
- Remote control incl. batteries
- User guide
- Warranty document
- Quick Start Guide

## PRODUCT SPECIFICATIONS

### GENERAL

|                         |                                                                                                                                                                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power consumption       | 362 Watt (Normal On-Mode), 250 Watt (Eco On-Mode), 415 Watt (Normal Peak-mode), 303 Watt (Eco Peak-Mode), 0.4 Watt (Energy saving standby)                                                                                                           |
| Supply Voltage          | AC 100 V - 240 V, 50 Hz - 60 Hz                                                                                                                                                                                                                      |
| Product dimensions      | 440 x 368 x 151 mm (Width x Depth x Height)                                                                                                                                                                                                          |
| Product weight          | 9.3 kg                                                                                                                                                                                                                                               |
| Noise Level             | Normal:36 dB (A) - Economy:26 dB (A)                                                                                                                                                                                                                 |
| Supported Temperature   | Storage -10° C - 60° C                                                                                                                                                                                                                               |
| Supported Humidity      | Operation 20% - 80%, Storage 10% - 90%                                                                                                                                                                                                               |
| Options                 | Air filter, Camera module, Ceiling mount, Document camera, External Speaker, HDBaseT Transmitter, Safety wire set, Suspension adapter, Wireless LAN unit                                                                                             |
| Room Type / Application | Large Meeting Room/Boardroom, Gaming, Auditorium, Meeting room / Classroom, Projection Mapping, Signage / Retail, Sports, Visitor Attraction                                                                                                         |
| Positioning             | Ceiling Mounted, Desktop                                                                                                                                                                                                                             |
| Colour                  | Black                                                                                                                                                                                                                                                |
| TCO Certified           | For further information relating to TCO Certified please visit <a href="https://tcocertified.com/files/certification/Information-document-for-end-users.pdf">https://tcocertified.com/files/certification/Information-document-for-end-users.pdf</a> |

### OTHER

|          |                                                             |
|----------|-------------------------------------------------------------|
| Warranty | 36 months Carry in<br>Optional warranty extension available |
|----------|-------------------------------------------------------------|

## PRODUCT SPECIFICATIONS

### TECHNOLOGY

|                   |                                             |
|-------------------|---------------------------------------------|
| Projection System | 3LCD Technology, RGB liquid crystal shutter |
| LCD Panel         | 0.67 inch with C2 Fine                      |

### IMAGE

|                         |                                                                       |
|-------------------------|-----------------------------------------------------------------------|
| Color Light Output      | 6,000 Lumen- 4,200 Lumen (economy) In accordance with IDMS15.4        |
| White Light Output      | 6,000 Lumen - 4,200 Lumen (economy) In accordance with ISO 21118:2020 |
| Resolution              | WUXGA                                                                 |
| Resolution Enhancement  | 4K enhancement                                                        |
| Aspect Ratio            | 16:10                                                                 |
| Contrast Ratio          | Over 5,000,000 : 1                                                    |
| Light source            | Laser                                                                 |
| Laser Light source      | 20,000 hours Durability High, 30,000 hours Durability Eco             |
| Keystone Correction     | Manual vertical: ±30 °, Manual horizontal ±30 °                       |
| Colour Video Processing | 10 Bits                                                               |
| Colour Reproduction     | Upto 1.07 billion colours                                             |

### OPTICAL

|                               |                                           |
|-------------------------------|-------------------------------------------|
| Throw Ratio                   | 0.50 - 0.70:1                             |
| Zoom                          | Manual, Factor:1 - 1.4                    |
| Lens                          | Optical                                   |
| Lens Shift                    | Manual - Vertical ±50 %, horizontal ±20 % |
| Screen Size                   | 100 inches - 500 inches                   |
| Projection Distance Wide      | 1.1 m - 5.6 m                             |
| Projection Distance Tele      | 1.5 m - 7.8 m                             |
| Projection Distance Wide/Tele | 1.09 m - 7.84 m                           |
| Projection Lens F Number      | 1.8 - 2                                   |
| Projection Lens Focal Length  | 7.54 mm - 10.55 mm                        |
| Projection Lens Focus         | Manual                                    |

### CONNECTIVITY

|                  |                                                                                                                                                                                                                                             |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interfaces       | USB 2.0-A (2x), USB 2.0 Type B (Service Only), RS-232C, Ethernet interface (100 Base-TX / 10 Base-T), Wireless LAN IEEE 802.11a/b/g/n/ac (optional), HDMI out, HDBaseT, Jack plug out, HDMI (HDCP 2.3) (2x), Near Field Communication (NFC) |
| Network Protocol | HTTPS, SNMP, ESC/VP.net, PJLink                                                                                                                                                                                                             |

### ADVANCED FEATURES

|                   |                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Security          | Kensington lock, Control panel lock, Padlock, Security cable hole, Wireless LAN unit lock, Password protection                                                                                                                                                                                                                                                                      |
| 2D Colour Modes   | Dynamic, Natural, Cinema, Presentation, DICOM SIM                                                                                                                                                                                                                                                                                                                                   |
| Other features    | 21:9 aspect ratio support, 4K enhancement, A/V mute, Auto Power On, Customizable user logo, Direct Power on/off, Document Camera Compatible, Edge Blending, Home Screen, JPEG Viewer, Network projection, OSD copy function, PC Free, Point correction, Quick Corner, Schedule Function, Split-Screen-Function, Ultra-wide display (16:6), Web Control, Web Remote, iProjection App |
| Video Color Modes | Cinema, Dynamic, Natural, Presentation, DICOM SIM, Multi Projection, BT709                                                                                                                                                                                                                                                                                                          |
| Projector control | via: Crestron Integrated Partner, Extron XTP, AMX Device Discovery                                                                                                                                                                                                                                                                                                                  |

## EB-L695SE

## WHAT'S IN THE BOX

- Main unit
- Power cable
- Remote control incl. batteries
- User guide
- Warranty document
- Quick Start Guide

PRODUCT SPECIFICATIONS

|                         |                                                                                                                                                                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GENERAL                 |                                                                                                                                                                                                                                                      |
| Power consumption       | 362 Watt (Normal On-Mode), 250 Watt (Eco On-Mode), 415 Watt (Normal Peak-mode), 303 Watt (Eco Peak-Mode), 0.4 Watt (Energy saving standby)                                                                                                           |
| Supply Voltage          | AC 100 V - 240 V, 50 Hz - 60 Hz                                                                                                                                                                                                                      |
| Product dimensions      | 440 x 368 x 151 mm (Width x Depth x Height)                                                                                                                                                                                                          |
| Product weight          | 9.3 kg                                                                                                                                                                                                                                               |
| Noise Level             | Normal:36 dB (A) - Economy:26 dB (A)                                                                                                                                                                                                                 |
| Supported Temperature   | Storage -10° C - 60° C                                                                                                                                                                                                                               |
| Supported Humidity      | Operation 20% - 80%, Storage 10% - 90%                                                                                                                                                                                                               |
| Options                 | Air filter, Camera module, Ceiling mount, Document camera, External Speaker, HDBaseT Transmitter, Safety wire set, Suspension adapter, Wireless LAN unit                                                                                             |
| Room Type / Application | Large Meeting Room/Boardroom, Gaming, Auditorium, Meeting room / Classroom, Projection Mapping, Signage / Retail, Sports, Visitor Attraction                                                                                                         |
| Positioning             | Ceiling Mounted, Desktop                                                                                                                                                                                                                             |
| Colour                  | Black                                                                                                                                                                                                                                                |
| TCO Certified           | For further information relating to TCO Certified please visit <a href="https://tcocertified.com/files/certification/Information-document-for-end-users.pdf">https://tcocertified.com/files/certification/Information-document-for-end-users.pdf</a> |
| OTHER                   |                                                                                                                                                                                                                                                      |
| Warranty                | 36 months Carry in<br>Optional warranty extension available                                                                                                                                                                                          |

EB-L695SE

WHAT'S IN THE BOX

- Main unit
- Power cable
- Remote control incl. batteries
- User guide
- Warranty document
- Quick Start Guide

## OPTIONAL ACCESSORIES

- Cable Cover - ELPCC07W-White - L6/7/89x Series  
V12H003AP0
- Cable Cover - ELPCC07B-Black - L6/7/89x Series  
V12H003AQ0
- Air Filter - ELPAF65 - L6/7/89x Series  
V13H134AF0
- Ceiling Mount (White) - ELPMB22  
V12H003B22
- Ceiling Mount (Low profile) - ELPMB30  
V12H526040
- Ceiling Pipe (700mm) - ELPFP14  
V12H003P14
- Ceiling Pipe (450mm) - ELPFP13  
V12H003P13
- Safety Wire - ELPWR01  
V12H003W01
- Active Speakers (2 x 15W) - ELPSP02  
V12H467040DA

## LOGISTICS INFORMATION

|                   |               |
|-------------------|---------------|
| SKU               | V11HB36180    |
| EAN code          | 8715946737911 |
| Country of Origin | Philippines   |

## Visualizers

- ELPDC07  
V12H759040
- ELPDC13  
V12H757040DA
- ELPDC21  
V12H758040DA
- ELPDC30  
V12HB09080



For more information please contact:

Home users: 0343 90 37766  
Business users\*: 0871 42 37766  
Republic of Ireland: 01 436 7742  
Or visit us at <https://www.epson.co.uk/contactus>  
\* 10p per minute plus network extras.

Web: [www.epson.co.uk](http://www.epson.co.uk)  
[www.epson.ie](http://www.epson.ie)

1. Epson has achieved 100% renewable electricity at all Epson group owned sites worldwide.

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners.  
Product information is subject to change without prior notice.  
Last extracted: 2025-06-30

**EPSON®**