

Lexmark E250d



LEXMARK

Lexmark E250d

The Lexmark E250d affordable, space-saving, monochrome laser printer with duplex standard produces excellent documents. Its 366 MHz processor and 32MB of standard memory provide high-quality printing at up to 30 ppm.



Lexmark E250d, E250dn

In the Box

Lexmark E250d

- Lexmark E250d printer
- 1,500-page Starter Return Program Toner Cartridge¹
- Photoconductor Kit² (Up to 30,000 pages)
- Dust Cover
- Automatic two-sided printing

- Power Cord
- Combined Drivers, Utilities and Publications CD
- Setup Sheet, Safety Notices, Supplies Return Program Flyer

Lexmark E250dn

- E250d printer **PLUS** Ethernet

Product Specifications

Part Number	E250d: 33S0100; E250dn: 33S0300
Product Class	Desktop laser printer
Speed	Up to 30 ppm
Time to First Page	As fast as 7.5 seconds (standby and power saver modes)
Print Resolution	2400 image quality printing; 1200 image quality printing; 600 x 600 dpi
Processor	366 MHz
Memory (std./max.)	32MB/96MB
Connectivity Standard Optional	E250d: Parallel, USB; E250dn: Parallel, USB, Ethernet E250d: Ethernet, Wireless, Gigabit Ethernet; E250dn: Wireless, Gigabit Ethernet
Printer Languages	PCL 6 emulations; PostScript 3 emulation (Mac only for E250d)
Fonts	PCL: 89 scalable, including OCR-A, OCR-B and code 3 of 9 bar codes; 2 bitmapped; PostScript: 89 scalable
Operating Systems	Windows, Mac, Novell, UNIX, Linux
Acoustics	Printing: 50 dBA; Quiet mode: 46 dBA; Idle: inaudible
Size (WxDxH)	15.6 in. x 14.1 in x 10.2 in. (396 mm x 359 mm x 259.5 mm)
Weight	25 lb. (11.4 kg)
Duty Cycle³	Maximum monthly duty cycle: Up to 50,000 pages per month
Recommended Monthly Page Volume⁴	200 - 2,200 pages per month

Media Specifications


Paper Capacity (sheets) Standard Maximum	Input: 250 + 1; Output: 150 + 1 Input: 801 (250 + 550 + 1); Output: 150 + 1
Paper Sources Standard Maximum	Input: 2; Output: 1 top, 1 rear Input: 3; Output: 1 top, 1 rear
Media Information Types Size Weight	Plain paper, card stock, transparencies, paper labels Letter, legal, executive, folio, statement, A4, A5, A6, JIS B5, universal (3 x 5 in. to 8.5 x 14 in.), envelopes (7 ³ / ₄ , 9, 10, DL, C5, B5) Plain paper: 16 to 43 lb. (60 to 163 g/m ²); Card stock: up to 90 lb. (199 g/m ²)

Shipping Dimensions

Lexmark E250d, E250dn
Size: 18.5 x 16.9 x 14.9
Weight: 29.2 lb.

Part Numbers

Supplies	3,500-page Return Program Toner Cartridge ¹	E250A11A
	3,500-page Toner Cartridge ¹	E250A21A
	30,000-page Photoconductor Kit ²	E250X22G
Memory Options	32MB SDRAM	1021257
	64MB SDRAM	1021258
Warranty	1-year Advanced Exchange (3-5 business days)	Base
	Upgrade of Base Warranty to Advanced Exchange next business day	2349194
	1-year Advanced Exchange next business day extended warranty	2349100
	2-year Advanced Exchange next business day extended warranty	2349101
	Upgrade of Base Warranty to Onsite Repair	2349107
	1-year Onsite Repair extended warranty	2349108
	2-year Onsite Repair extended warranty	2349109
	Upgrade of Base Warranty to Onsite Exchange next business day	2349116
	1-year Onsite Exchange next business day extended warranty	2349117
2-year Onsite Exchange next business day extended warranty	2349118	

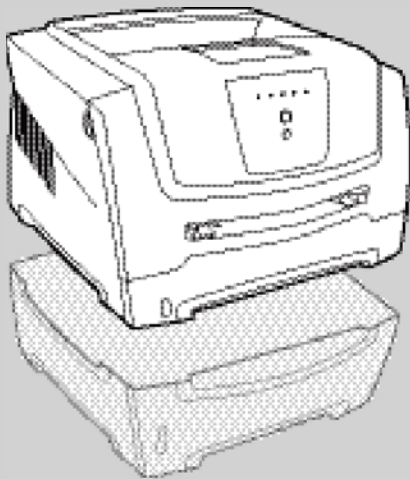

- Single-sheet Slot (standard)
- 250-sheet Drawer (standard)
- Duplex (standard)
- 550-sheet Drawer (28S0803)

¹ Declared standard yield value in accordance with ISO/IEC 19752

² Yield based on approximately 5% coverage

³ Duty Cycle is defined as the maximum number of pages a device could deliver in a month. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

⁴ Recommended Monthly Page Volume is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage

Additional Part Numbers

Connectivity	External Print Servers	
	Lexmark MarkNet™ N7000e Fast Ethernet - 1 port ¹	14T0230
	Lexmark MarkNet N7020e Gigabit Ethernet - 4 port ¹	14T0220
	Lexmark N7002e Fast Ethernet - 1 port	14T0240
	Lexmark N4000e Print Server ¹	14T0030
	Wireless Print Adapters	
	Lexmark N4050e 802.11g Print Server ¹	14T0145
Cables	10-foot Parallel Cable	1021231
	6-foot USB Cable	1021294
Media	Lexmark Laser Transparencies	70X7240

Terms & Conditions

Lexmark, MarkNet and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PCL is a registered trademark of Hewlett Packard Company. The USB logo is a trademark of Universal Serial Bus Implementers Forum, Inc. All other trademarks are the property of their respective owners. © 2006 Lexmark International, Inc. All rights reserved.

¹ Requires USB connection
² Requires Parallel connection