

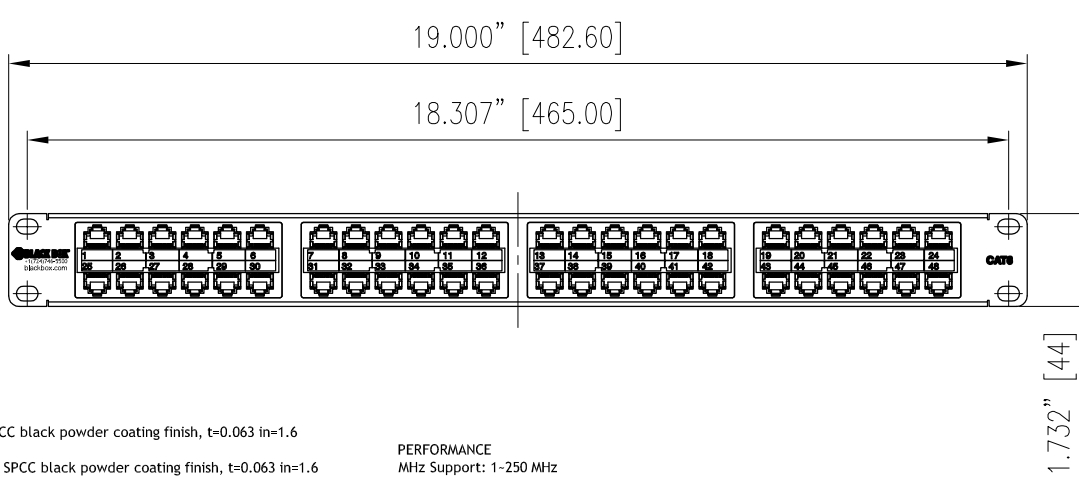
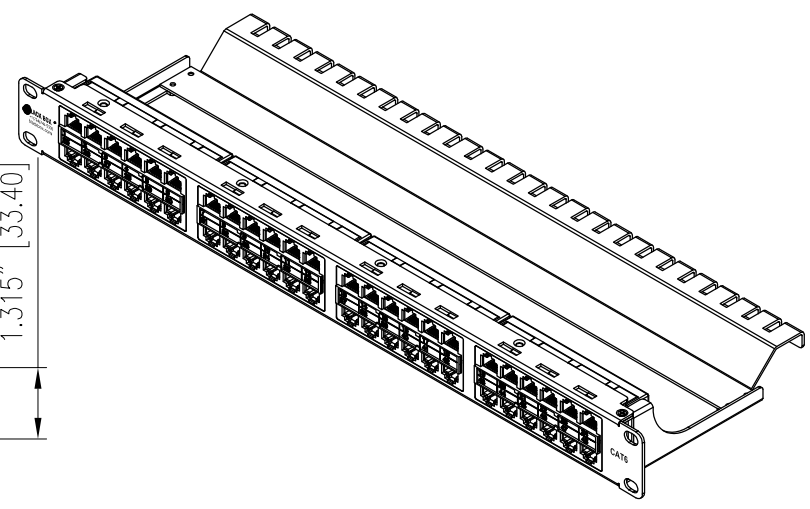


REVISIONS		
Rev	DESCRIPTION	DATE
A	INITIAL RELEASE	2014.06.23

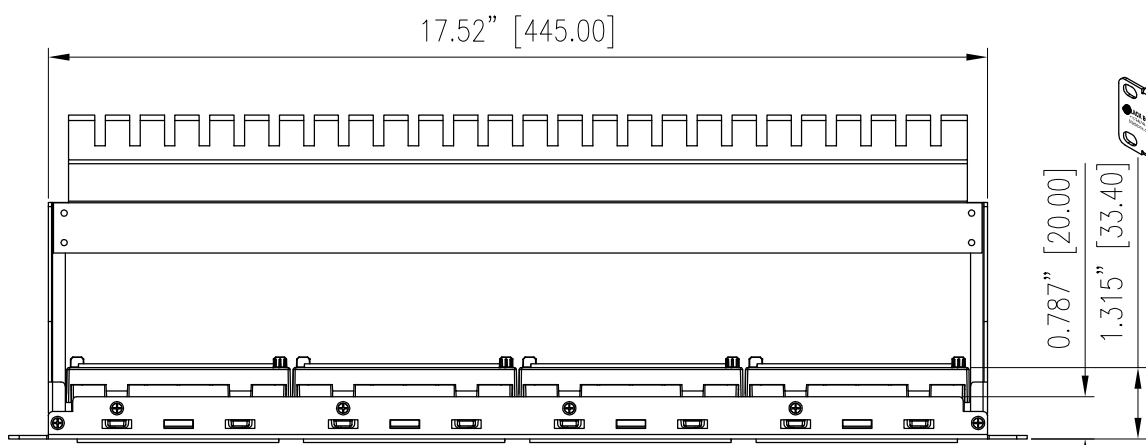

MATERIAL
 Front Panel: SPCC black powder coating finish, t=0.063 in=1.6 mm=15 ga
 Cable Manager: SPCC black powder coating finish, t=0.063 in=1.6 mm=15 ga
 Frame: Bezel: Zinc alloy, ASTM: AG-40A

Coupler
 Overall Shield: Copper C2680, t=0.25 mm (0.009 in), plated with 0.67 μm (30 μin) nickel
 Housing: High-impact Acrylonitrile Butadiene Styrene (ABS resin), UL 94 V-0 rated
 Jack Contacts: Phosphor bronze flat wire, plated with 50 μin (1.27 μm) thick hard gold over nickel underplate
 Contact Holder: High-impact Acrylonitrile Butadiene Styrene (ABS resin), UL 94 V-0 rated
 PCB: FR4, UL 94 V-0 rated

RoHS 2 compliant

PERFORMANCE
 MHz Support: 1-250 MHz
 Bandwidth Support: 10/100/1000 Mbps
 Meet TIA-568-C.2 Cat.6 Connecting Hardware requirement



DIMENSIONS ARE IN[MM]				TOLERANCES:	
-0.787[20]	-1.969[50]	-5.906[150]	5.900[150]	ANGLE	
±0.008[0.2]	±0.014[0.4]	±0.027[0.5]	±0.059[1.5]	±2°	
3rd Angle Projection					

The information contained in this document is the sole property of Black Box Corporation of Pennsylvania. Any reproduction in part or whole without the written permission of Black Box Corp. is prohibited.
 ©Copyright 2012 Black Box Corporation of Pennsylvania d/b/a Black Box Network Services. All Rights Reserved.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ±
 ANGULAR: MACH ± BEND ±
 TWO PLACE DECIMAL ±
 THREE PLACE DECIMAL ±

INTERPRET GEOMETRIC TOLERANCING PER:
 MATERIAL
 FINISH
 DO NOT SCALE DRAWING



NAME	DATE	TITLE: Category 6 High Density Feed Through Patch Panel Shilded-48 Port		
DRAWN: Rita Lee	2014.06.23	SIZE: B	DWG. NO.: JPM816A-HD	REV: A
ENG APPR: Kihai Lee	2014.06.23	SCALE: X SHEET 1 OF 1		
CHECKED: Max Wang	2014.06.23			
COMMENTS:				