24" (23.6" viewable) **Full HD LED Display**



Ultimate Monitor for Entertainment and Gaming

VX2452mh





ViewSonic's VX2452mh is a 24" (23.6" viewable) Full HD, glossy-finish display that offers the ultimate visual experience for gaming and multimedia entertainment. The VX2452mh features ClearMotiv[™] II technology that delivers 2ms ultra-fast response time for blur-free images during extreme gaming, and an ultra-high 50M:1 MEGA Dynamic Contrast Ratio for sharp, crisp color performance for enjoying movies. Integrated D-sub, DVI and HDMI inputs provide flexible connectivity for highdefinition multimedia devices and gaming consoles, and dual built-in 2W stereo speakers complete the package for multimedia enjoyment. With a VESA-mountable design, the VX2452mh can also be used as a wallmounted display for any of your gaming and video entertainment needs. A 3-year limited warranty and the industry's best pixel performance policy make the VX2452mh a great long-term investment.

Blazing-fast Response Time for Blur-free Action

With 2ms response time, the VX2452mh delivers smooth images without streaking, blurring or ghosting. This blazing-fast response time is perfect for the most graphicintense gaming needs, and just as great for watching sports or action movies.



Game Mode

ViewSonic's Game Mode provides heightened visibility and detail by brightening dark scenes. Dominate the competition and see your

opponents' every move, even in the darkest scenes of a video game. With just the press of a button, ViewSonic's Game Mode delivers

superior color performance for the ultimate gaming experience.





Game Mode ON

Game Mode OFF

Stunning Resolution and Clarity

The VX2452mh features Full HD 1920x1080 resolution for unbelievable pixel-by-pixel image performance. With a 50M:1 MEGA Dynamic Contrast Ratio, the VX2452mh delivers the most amazing clarity and detail whether for gaming or enjoying the latest in multimedia entertainment.

24" (23.6" viewable) Full HD LED Display



VX2452mh

Flexibile HDMI Connectivity

HDMI is the highest, future-proof video standard, guaranteed for true digital picture clarity. The HDMI interface on

the VX2452mh allows you to connect to a variety of HD devices including gaming consoles, Blu-ray players, laptop PCs, digital cameras, and many others for the ultimate true high-definition experience.




VESA-mountable Design

The VX2452mh features a 100 x 100mm VESA-mountable design that allows you to mount the display on a monitor stand or on a wall, depending on your specific needs. You can easily detach the base by unscrewing four

screws and then mounting the display on its new stand or wall mount. With a convenient VESA mount and thin bezel display, the VX2452mh is perfect for multi-monitor setup for an unparalleled gaming experience.



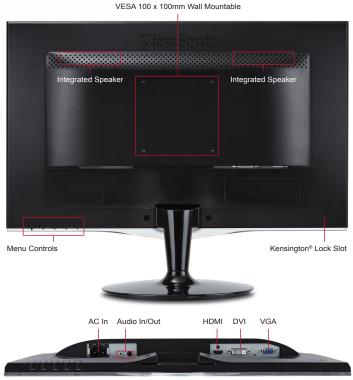

Specifications		
LCD Panel	Type Display Area Optimum Resolution Brightness Contrast Ratio Oynamic Contrast Ratio Viewing Angles Response Time Backlight Life Panel Surface	23.6" Wide Color a-Si TFT Active Matrix LED 20.5" horizontal x 11.5" vertical; 23.6" diagonal 1920x1080 300 cd/m² (typ.) 1000:1 (typ.) 50M:1 170° horizontal, 160° vertical 2ms (GTG) White-light LED 30,000 hours (min.) Anti-glare, hard-coating (3H)
VIDEO INPUT	Analog Digital Frequency Sync	RGB analog (0.7 / 1.0 Vp-p, 75 ohms) HDMI / DVI-D (TMDS, 100 ohms) Fh: 24~82kHz, Fv: 50~75Hz Separate Sync
AUDIO	Speakers	2-watt (x2)
COMPATIBILITY	PC Mac [®]	PC compatibles (from VGA up to 1920x1080 non-interlaced) Up to 1920x1080
CONNECTOR	Video Analog Video Digital Audio Out Audio In Power	15-pin mini D-sub (VGA) HDMI, DVI-D (with HDCP) 3.5mm jack (blue) 3.5mm jack (green) 3-pin plug (CEE22)
POWER	Voltage Consumption Optimize Conserve	AC 100–240V (universal), 50 / 60Hz 21.5W (typ) 18.6W (typ) 15.8W (typ)
CONTROLS	Front Panel Buttons OSD	Power, 1, 2, up, down Auto Image Adjust, Contrast/Brightness, Input Select, Color Adjust, Audio Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS	Tilt	Forward 0°, Back 20°
OPERATING CONDITIONS	Temperature Humidity	32–104° F (0–40° C) 10–90% (non-condensing)
DIMENSIONS (W x H x D)	Physical (w/ Stand) Physical (w/o Stand) Packaging	22.0 x 17.0 x 8.8 in. / 559.2 x 431.7 x 222.5 mm 22.0 x 14.0 x 2.1 in. / 559.2 x 356.7 x 53.0 mm 24.0 x 17.9 x 4.8 in. / 609 x 454 x 123 mm
WEIGHT	Net (w/ Stand) Net (w/o Stand) Gross	8.3 lb. / 3.8 kg 7.6 lb. / 3.5 kg 11.9 lb. / 5.4 kg
WALL MOUNT	VESA®	100 x 100 mm
REGULATIONS		CE,CB, BSMI, PSB, SASO, C-tick, UL/cUL, FCC-B (including ICES003), TUV-S, NOM, GOST-R/Hygienic, UKrSEPRO, Erp, CCC, China Energy, ENERGY STAR 5.2, EPEAT Silver, WEEE, ROHS, SVHC list
RECYCLE / DISPOSAL		Please dispose of in accordance with local, state or federal laws.
POWER MANAGEMENT		ENERGY STAR® standards
WARRANTY		Three-year limited warranty on parts, labor and backlight.

What's in the box?

VX2452mh display, power cable, VGA cable, DVI cable, audio cable, Quick Start Guide, ViewSonic Wizard CD





















SPEAKERS 50M:1 DCR

