



CAT5e U/UTP Cable

0.5m



Cable Standard	CAT5e
Cable Shielding	U/UTP
Connector 1	RJ-45
Connector 1 Gender	Male
Connector 1 Form Factor	Straight
Connector 2	RJ-45
Connector 2 Gender	Male
Connector 2 Form Factor	Straight
Cable Length	0.5m
Conductor Type	Stranded
Conductor Material	Copper-clad Aluminum
Jacket Material	Polyvinyl chloride (PVC)
Connector Contacts Plating	3U" Gold
AWG Wire Size	26
Outer Diameter	4.5mm
Product Color	Yellow
Weight	23.6g
Cabling Technology	10/100/1000Base-T(X)
PoE Compatability	None
Data Transfer Rate	1000 Mbps
Operating Temperature	-10° - 60° C
Storage Temperature	-15° - 60° C
Certification	REACH, RoHS, CE
Plug and Play	Yes

Part no. V-5UTP-005Y

The ProXtend CAT5e U/UTP CCA ethernet cables are produced with a copper-clad aluminum strands and an AWG of 26 to create a cost-effective product.

The cable is reinforced with strain relief for increased durability and latch protection allowing for secure installation.

CAT5e

U/UTP

CCA

30 YEAR
WARRANTY




See more products on
proxtend.com

Network cables

CAT5e U/UTP CCA

The ProXtend CAT5e U/UTP CCA ethernet cables are produced with a copper-clad aluminum strands and an AWG of 26 to create a cost-effective product. The cable is reinforced with strain relief and latch protection allowing for secure installation.

Supporting a variety of cable standards, lengths and shieldings, ProXtend is your one stop shop for ethernet cables ensuring that you are always able to find a cable that best suits your network connection requirements.

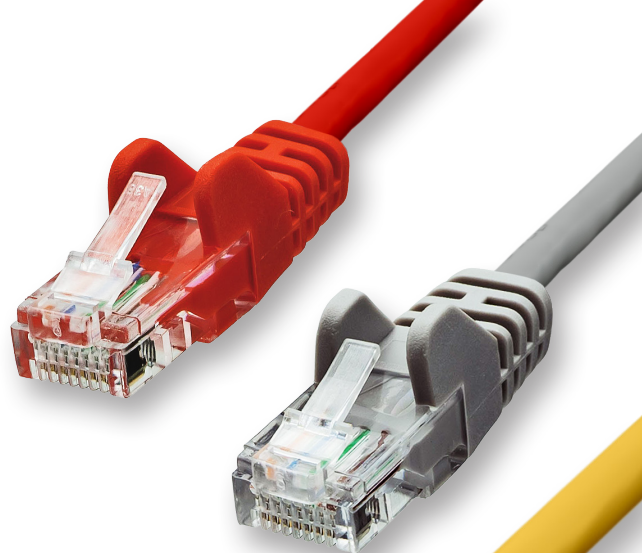

Latch protection
for secure installation



Strain relief
for increased
durability

3U" Gold plated RJ45 connectors

A vast variety of length and colour options

	GREY	WHITE	BLACK	BLUE	GREEN	ORANGE	RED	YELLOW
20 cm	V-5UTP-002G	V-5UTP-002W	V-5UTP-002B	V-5UTP-002BL	V-5UTP-002GR	V-5UTP-002O	V-5UTP-002R	V-5UTP-002Y
25 cm	V-5UTP-0025G	V-5UTP-0025W	V-5UTP-0025B	V-5UTP-0025BL	V-5UTP-0025GR	V-5UTP-0025O	V-5UTP-0025R	V-5UTP-0025Y
30 cm	V-5UTP-003G	V-5UTP-003W	V-5UTP-003B	V-5UTP-003BL	V-5UTP-003GR	V-5UTP-003O	V-5UTP-003R	V-5UTP-003Y
0.5 m	V-5UTP-005G	V-5UTP-005W	V-5UTP-005B	V-5UTP-005BL	V-5UTP-005GR	V-5UTP-005O	V-5UTP-005R	V-5UTP-005Y
1 m	V-5UTP-01G	V-5UTP-01W	V-5UTP-01B	V-5UTP-01BL	V-5UTP-01GR	V-5UTP-01O	V-5UTP-01R	V-5UTP-01Y
1.5 m	V-5UTP-015G	V-5UTP-015W	V-5UTP-015B	V-5UTP-015BL	V-5UTP-015GR	V-5UTP-015O	V-5UTP-015R	V-5UTP-015Y
2 m	V-5UTP-02G	V-5UTP-02W	V-5UTP-02B	V-5UTP-02BL	V-5UTP-02GR	V-5UTP-02O	V-5UTP-02R	V-5UTP-02Y
3 m	V-5UTP-03G	V-5UTP-03W	V-5UTP-03B	V-5UTP-03BL	V-5UTP-03GR	V-5UTP-03O	V-5UTP-03R	V-5UTP-03Y
5 m	V-5UTP-05G	V-5UTP-05W	V-5UTP-05B	V-5UTP-05BL	V-5UTP-05GR	V-5UTP-05O	V-5UTP-05R	V-5UTP-05Y
7 m	V-5UTP-07G	V-5UTP-03W	V-5UTP-03B	V-5UTP-03BL	V-5UTP-03GR	V-5UTP-03O	V-5UTP-03R	V-5UTP-03Y
10 m	V-5UTP-10G	V-5UTP-10W	V-5UTP-10B	V-5UTP-10BL	V-5UTP-10GR	V-5UTP-10O	V-5UTP-10R	V-5UTP-10Y
15 m	V-5UTP-15G	V-5UTP-15W	V-5UTP-15B	V-5UTP-15BL	V-5UTP-15GR	V-5UTP-15O	V-5UTP-15R	V-5UTP-15Y
20 m	V-5UTP-20G	V-5UTP-20W	V-5UTP-20B	V-5UTP-20BL	V-5UTP-20GR	V-5UTP-20O	V-5UTP-20R	V-5UTP-20Y



A-BRAND
QUALITY



COMPETITIVE
PRICES



EXTENDED
WARRANTY



EXPRESS
DELIVERY



PRODUCT SUPPORT
& KNOW HOW



MARKETING
SUPPORT

www.proxtend.com

ProXtend

Twisted pair Network Cables


A standard network cable contains eight strands twisted into four pairs.

The twisting of the pairs and an electronically conductive shield not only reduce the likelihood of cross-talk between neighboring pairs of conductors within the cable, but also make the cable more resilient to interference from magnetic fields, produced by the flow of electrical current through the cable’s strands and core.



Jacket

ProXtend supports three main types of materials for network cable jackets: PVC (Polyvinyl Chloride), PE (Polyethylene) and LSZH, also known as LSOH (Low Smoke Zero Halogen). Although PVC cables are softer, flexible and easier to handle, the LSZH cables are firmer and less flexible due to their flame retardant compound. The halogen-free jacket of LSZH network cables does not produce dangerous gas, smoke or acid in situations of fire and is becoming a common requirement in installations where the protection of people and equipment from toxic and corrosive gasses is critical. The PE jacket is resistant to weathering and UV radiation, which makes it one of the best options for outdoor cable systems.

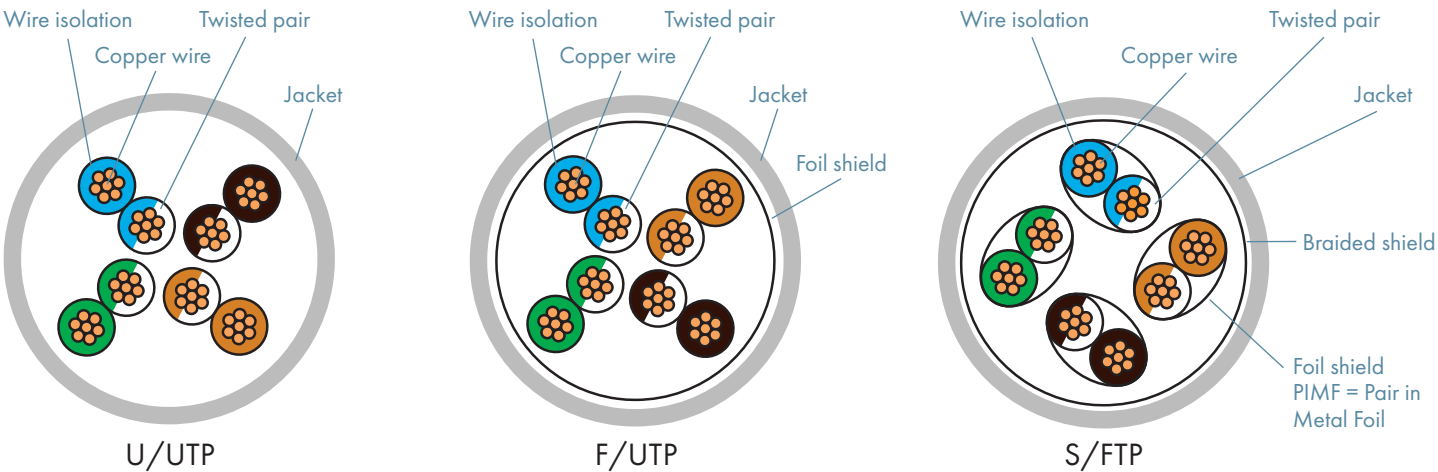

Shielding

The two basic types of cables are shielded and unshielded. In contrast to the shielded cables, the unshielded cables offer a lesser quality transmission rate, becoming more noticeable when transmitting larger amounts of data over greater distances. A shielded cable, or a twisted pair, is wrapped in a foil screen which protects the cable from electromagnetic interference (EMI). A cable’s shielding can easily be deciphered once the naming convention is understood. The part of the name before the slash (/) signifies the shielding of the outer cable jacket which can be U (unshielded), F (foil shielded), S (braided shield), SF (braided and foil shielded); while the part of the name after the slash signifies the type of shielding of the twisted pairs (TP). The twisted pair shielding can be U (unshielded), F (foil shielded) and S (braided shield). As an example, a U/UTP cable translates to unshielded outer jacket/unshielded twisted pairs.

Categories

Twisted pair network cables are standardized and divided into different categories based on performance.

CATEGORY	MAX. DATA RATE	BANDWIDTH	APPLICATION
CAT 5e	1 Gbps	100 MHz	1GBase-T
CAT 6	1 Gbps	250 MHz	1GBase-T, 155-MBit-ATM, 622-MBit-ATM
CAT 6A	10 Gbps	500 MHz	10GBase-T
CAT 7	10 Gbps	600 MHz	10GBase-T