

## SFP-25G-LR-CW-49-AO

Cisco® Compatible TAA 25GBase-CWDM SFP28 Transceiver (SMF, 1490nm, 10km, LC, DOM)

### Features

- Up to 25.78Gbps bi-directional data links
- Built-in dual CDR with bypass function
- Electrical interface specifications per SFF-8431
- CWDM-rated EML Transmitter and APD Receiver
- Up to 10km on 9/125um SMF
- SFP28 MSA package with duplex LC connector
- Operating temperature: 0 to 70 Celsius
- Single +3.3V power supply
- 1.8W maximum power consumption
- SFF-8432 and SFF-8472 Compliance
- Class 1 Laser Safety Certified
- RoHS compliant and lead-free



### Applications

- 25x Gigabit Ethernet over CWDM
- Access, Metro and Enterprise
- Mobile Fronthaul CPRI/OBSAI

### Product Description

This Cisco® SFP28 transceiver provides 25GBase-CWDM throughput up to 10km over single-mode fiber (SMF) using a wavelength of 1490nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Cisco® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



### Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4.
- ESD to the LC Receptacle: compatible with IEC 61000-4-3.
- EMI/EMC: compatible with FCC Part 15 Subpart B Rules, EN55022:2010.
- Laser Eye Safety: compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1, 2.
- RoHS: compliant with EU RoHS 2.0 directive 2015/863/EU.

### CWDM Available Wavelengths

| Wavelengths | Min.   | Typ. | Max.   |
|-------------|--------|------|--------|
| 47          | 1464.5 | 1471 | 1477.5 |
| 49          | 1484.5 | 1491 | 1497.5 |
| 51          | 1504.5 | 1511 | 1517.5 |
| 53          | 1524.5 | 1531 | 1537.5 |
| 55          | 1544.5 | 1551 | 1557.5 |

### Absolute Maximum Ratings

| Parameter                                        | Symbol | Min. | Typ.           | Max.               | Unit | Notes |
|--------------------------------------------------|--------|------|----------------|--------------------|------|-------|
| Maximum Supply Voltage                           | Vcc    | -0.5 |                | 4.0                | V    |       |
| Storage Temperature                              | Tstg   | -40  |                | 85                 | °C   |       |
| Operating Case Temperature                       | Tc     | 0    | 25             | 70                 | °C   |       |
| Relative Humidity                                | RH     | 5    |                | 95                 | %    |       |
| Data Rate                                        |        |      | 24.33<br>25.78 |                    | Gbps |       |
| Bit Error Rate                                   | BER    |      |                | $5 \times 10^{-5}$ |      | 1     |
| Supported Link Length on 9/125µm SMF @ 25.78Gbps | L      |      | 10             |                    | km   | 2     |

### Notes:

1. Tested with a PRBS 2<sup>31</sup>-1 test pattern for 25.78Gbps operation.
2. Distances are based on FC-PI-6 Rev. 3.1 and IEEE 802.3 standards.

## Electrical Characteristics

| Parameter                       |                      | Symbol                         | Min.  | Typ. | Max.     | Unit  | Notes |
|---------------------------------|----------------------|--------------------------------|-------|------|----------|-------|-------|
| Power Supply Voltage            |                      | V <sub>CC</sub>                | 3.135 | 3.3  | 3.465    | V     |       |
| Power Supply Current            |                      | I <sub>CC</sub>                |       |      | 545      | mA    |       |
| Power Dissipation               |                      | P <sub>D</sub>                 |       |      | 1800     | mW    |       |
| Transmitter                     |                      |                                |       |      |          |       |       |
| Differential Input Impedance    |                      | Z <sub>IN</sub>                |       | 100  |          | Ω     |       |
| Differential Data Input Swing   |                      | V <sub>IN,pp</sub>             | 180   |      | 700      | mVp-p |       |
| Tx_Fault                        | Transmitter Fault    | V <sub>OH</sub>                | 2.0   |      | Host_Vcc | V     |       |
|                                 | Normal Operation     | V <sub>OL</sub>                | 0     |      | 0.8      | V     |       |
| Tx_Disable                      | Transmitter Disable  | V <sub>IH</sub>                | 2.0   |      | Host_Vcc | V     |       |
|                                 | Transmitter Enable   | V <sub>IL</sub>                | 0     |      | 0.8      | V     |       |
| Receiver                        |                      |                                |       |      |          |       |       |
| Differential Output Impedance   |                      | Z <sub>OUT</sub>               |       | 100  |          | Ω     |       |
| Differential Data Output Swing  |                      | V <sub>OUT,pp</sub>            | 300   |      | 850      | mVp-p | 1     |
| Data Output Rise Time/Fall Time |                      | T <sub>r</sub> /T <sub>f</sub> | 15    |      |          | ps    | 2     |
| Rx_LOS                          | Loss of Signal (LOS) | V <sub>OH</sub>                | 2.0   |      | Host_Vcc | V     | 3     |
|                                 | Normal Operation     | V <sub>OL</sub>                | 0     |      | 0.8      | V     | 3     |

### Notes:

1. Internally AC coupled but requires an external 100Ω differential load termination.
2. 20–80 %.
3. LOS is an open collector output. Should be pulled up with 4.7kΩ on the host board.

## Optical Characteristics

| Parameter                          | Symbol           | Min.   | Typ. | Max.   | Unit | Notes |
|------------------------------------|------------------|--------|------|--------|------|-------|
| Transmitter                        |                  |        |      |        |      |       |
| Launch Optical Power               | P <sub>o</sub>   | 0      |      | 5      | dBm  | 1     |
| Extinction Ratio                   | ER               | 4.5    |      |        | dB   |       |
| Center Wavelength Range            | λ <sub>C</sub>   | 1464.5 |      | 1557.5 | nm   |       |
| Transmitter and Dispersion Penalty | TDP              |        |      | 4      | dB   |       |
| Spectral Width                     | Δλ               |        |      | 1      | nm   | 2     |
| Optical Return Loss Tolerance      | ORLT             |        |      | 21     | dB   |       |
| Pout @Tx_Disable Asserted          | P <sub>off</sub> |        |      | -30    | dBm  |       |
| Receiver                           |                  |        |      |        |      |       |
| Center Wavelength                  | λ <sub>C</sub>   | 1460   |      | 1620   | nm   |       |
| Receiver Sensitivity (Avg)         | S                |        |      | -19    | dBm  | 1     |
| Receiver Overload                  | P <sub>max</sub> | -4     |      |        | dBm  |       |
| Optical Return Loss                | ORL              | 26     |      |        | dB   |       |
| LOS De-Assert                      | LOSD             |        |      | -19    | dBm  |       |
| LOS Assert                         | LOSA             | -35    |      |        | dBm  |       |
| LOS Hysteresis                     |                  | 0.5    |      |        | dB   |       |

### Notes:

1. Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
2. 20dB spectral width.
3. Measured with PRBS 2<sup>31</sup>-1 at 5×10<sup>-5</sup> BER.

## Pin Descriptions

| Pin | Symbol     | Name/Descriptions                                                         | Ref. |
|-----|------------|---------------------------------------------------------------------------|------|
| 1   | VeeT       | Transmitter Ground (Common with Receiver Ground).                         | 1    |
| 2   | Tx_Fault   | Transmitter Fault. LVTTTL-O.                                              | 2    |
| 3   | Tx_Disable | Transmitter Disable. Laser output disabled on “high” or “open.” LVTTTL-I. | 3    |
| 4   | SDA        | 2-Wire Serial Interface Data. Same as MOD-DEF2 in INF-8074i. LVTTTL-I/O.  |      |
| 5   | SCL        | 2-Wire Serial Interface Data. Same as MOD-DEF2 in INF-8074i. LVTTTL-I.    |      |
| 6   | MOD_ABS    | Module Absent. Connect to VeeT or VeeR in the module.                     | 4    |
| 7   | RS0        | Rate Select 0. Not used.                                                  | 5    |
| 8   | LOS        | Loss of Signal Indication. Logic 0 indicates normal operation. LVTTTL-O.  | 2    |
| 9   | RS1        | Rate Select 1. Not used.                                                  | 5    |
| 10  | VeeR       | Receiver Ground (Common with Transmitter Ground).                         | 1    |
| 11  | VeeR       | Receiver Ground (Common with Transmitter Ground).                         | 1    |
| 12  | RD-        | Receiver Inverted Data Out. AC Coupled. CML-O.                            |      |
| 13  | RD+        | Receiver Non-Inverted Data Out. AC Coupled. CML-O.                        |      |
| 14  | VeeR       | Receiver Ground (Common with Transmitter Ground).                         | 1    |
| 15  | VccR       | Receiver Power Supply.                                                    |      |
| 16  | VccT       | Transmitter Power Supply.                                                 |      |
| 17  | VeeT       | Transmitter Ground (Common with Receiver Ground).                         | 1    |
| 18  | TD+        | Transmitter Non-Inverted Data In. AC Coupled. CML-I.                      |      |
| 19  | TD-        | Transmitter Inverted Data In. AC Coupled. CML-O.                          |      |
| 20  | VeeT       | Transmitter Ground (Common with Receiver Ground).                         | 1    |

## Notes:

1. The module signal ground contacts, VeeR and VeeT, should be isolated from the module case.
2. This contact is an open collector/drain output and should be pulled up to the Host\_Vcc with the resistor in the range 4.7kΩ-10kΩ. Pull-ups can be connected to one or several power supplies; however, the host board design shall ensure that no module contract has voltage exceeding module VccT/R+0.5V.
3. Tx\_Disable is an input contact with a 4.7kΩ-10kΩ pull-up resistor to the VccT inside the module.
4. MOD\_ABS is connected to the VeeT or VeeR in the SFP+ module. The host may pull the contract up to Host\_Vcc with a resistor in the range from 4.7kΩ-10kΩ. MOD\_ABS is asserted “high” when the SFP+ module is physically absent from a host slot.
5. Internally pulled down per SFF-8431.




Pin-Out of Connector Block on the Host Board


### Recommended Host Board Power Supply Filter Network



Recommended Application Interface Block Diagram

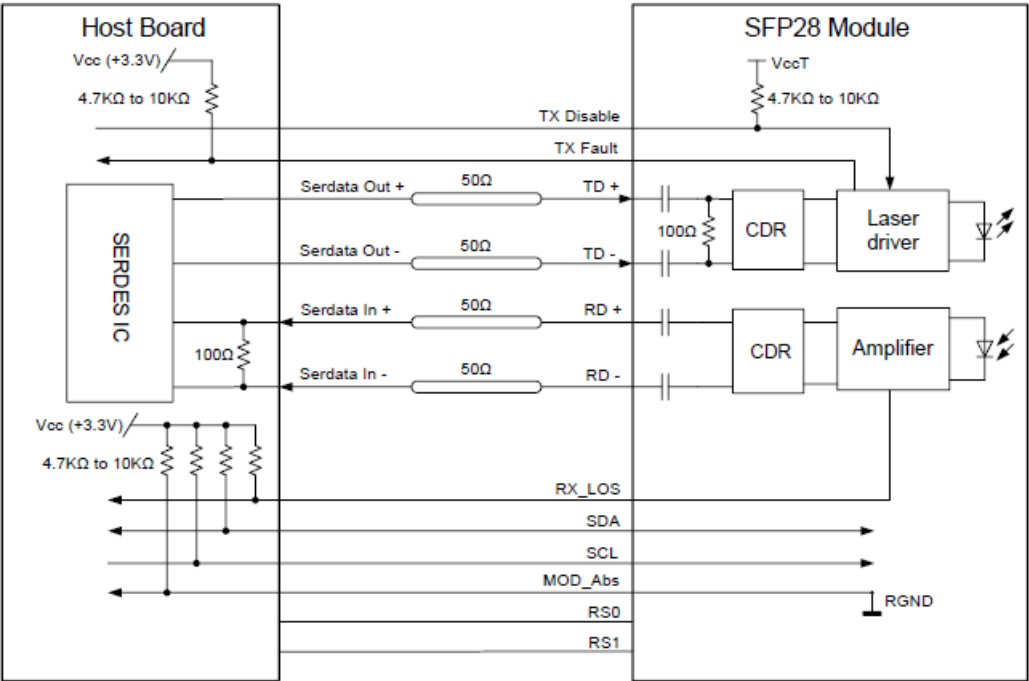

Mechanical Specifications

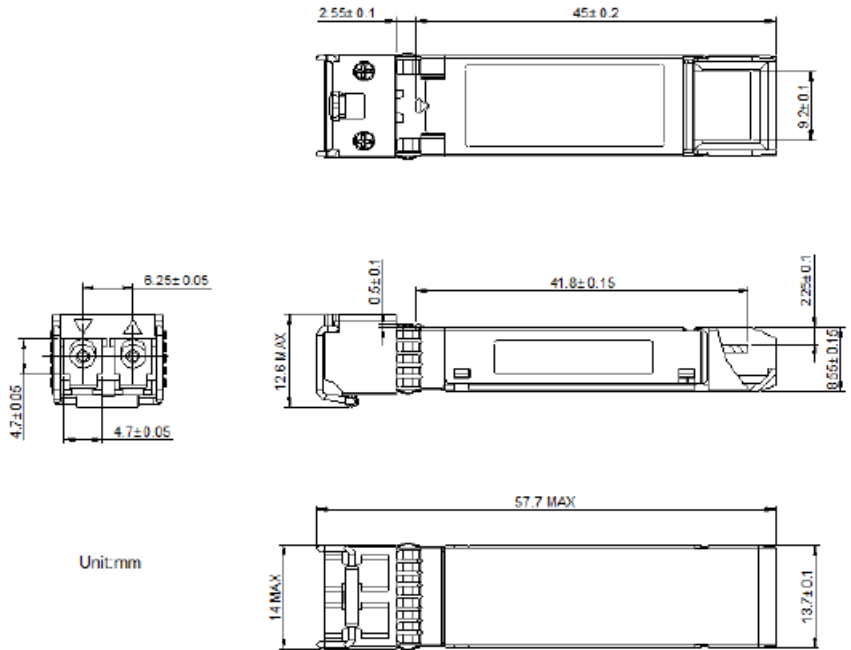

**About AddOn Networks**

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.

**U.S. Headquarters**

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

**Europe Headquarters**

Email: [salesupportemea@addonnetworks.com](mailto:salesupportemea@addonnetworks.com)

Telephone: +44 1285 842070