


Ultimate Medical Computer



- | | | | |
|-----------------------------|--|------------------------|--|
| Display | <ul style="list-style-type: none"> • 20-inch 16:9 widescreen (1920x1080) IP64 splash-proof & dustproof front bezel | I/O Ports | <ul style="list-style-type: none"> • 2 X USB 3.0 ports, 4 x USB 2.0 ports • 1 x RS232 serial port, option to expand to 3 COM ports • DVI-I monitor out port • HDMI Full 1080p |
| CPU Support | <ul style="list-style-type: none"> • 2nd generation Intel® Core™ i3 & i5 processors | Power Supply | <ul style="list-style-type: none"> • Medical Grade 180Watt AC Adapter. Input: universal 100 ~ 240V AC, 50-60Hz. Supports Output range: DC12V/19V. 5.0A/9.5A Adapters for Energy Star 5.0/UL |
| Chipset | <ul style="list-style-type: none"> • Intel® H61 Express chipset (Sandy Bridge) | Touch Screen | <ul style="list-style-type: none"> • 5-Wire resistive technology supports up to 10 million touches |
| Memory | <ul style="list-style-type: none"> • 2 x DDR3 204-pin SO-DIMM sockets, populated up to 8GB Max. Supports PC3-10600 1333MHz SO-DIMM | Wireless | <ul style="list-style-type: none"> • Intel Centrino dual band a/g/n + Bluetooth |
| HDD Support | <ul style="list-style-type: none"> • Integrated Serial ATA controller facilitates high-speed transfers up to 3Gbps for each of the four ports | Webcam | <ul style="list-style-type: none"> • 1.3 megapixel camera (front-facing) |
| Video & Graphics | <ul style="list-style-type: none"> • The Intel® integrated H61 Chipset, with Intel® HD Graphics (Intel® GMA HD), includes built-in support for full 1080p HD video playback. Maximum resolution: 2560 x 1600 | Wall Mount | <ul style="list-style-type: none"> • Supports both 75mm & 100mm VESA mounting holes |
| Networking | <ul style="list-style-type: none"> • Dual Gigabit (Gbe) Fast Ethernet, Realtek RTL 8111E | Expansion Slots | <ul style="list-style-type: none"> • Two Mini PCI-e (1xFull-size and 1xHalf-size) |
| Audio | <ul style="list-style-type: none"> • Realtek ALC892 High Definition Audio enables premium Dolby Digital 5.1 surround sound, 10 channels of enhanced sound quality, and delivers advanced features such as multiple audio streams and jack re-tasking. | Bios | <ul style="list-style-type: none"> • AMI Flash BIOS supports ACPI, API, DMI, Plug & Play, and security password. Supports booting from HDD, PXE, LAN, CD-ROM, and ANY USB device. Has BIOS System POST and BIOS setup password protection |
| | | Security Lock | <ul style="list-style-type: none"> • Security lock slot located on the back of the system case |
| | | Swivel base | <ul style="list-style-type: none"> • Optional base stand with Antimicrobial Germ protection with rotation left/right and tilt function up/down |

- | | | | |
|--------------------------|--|-----------------------|--|
| Weight | • Unit: 22.9lbs with base, 17lbs without base, Power Adapter: 2.2lbs | O/S | • Windows 8, Windows 7, XP, Linux |
| Environment | • Ambient Temperature: 0°C ~ 50°C (operating) | Dimensions | • 19.3" long, 14.2" tall, 3.1" deep (not including base) |
| Relative Humidity | • 10% ~ 90% (non-condensing) | Colors | • White with Antimicrobial Germ Protection |
| | | Certifications | • EN60601-1 medically certified, UL60950 electrical safety, FCC class B, CE, Energy Star 5.2, RoHs, WEEE |

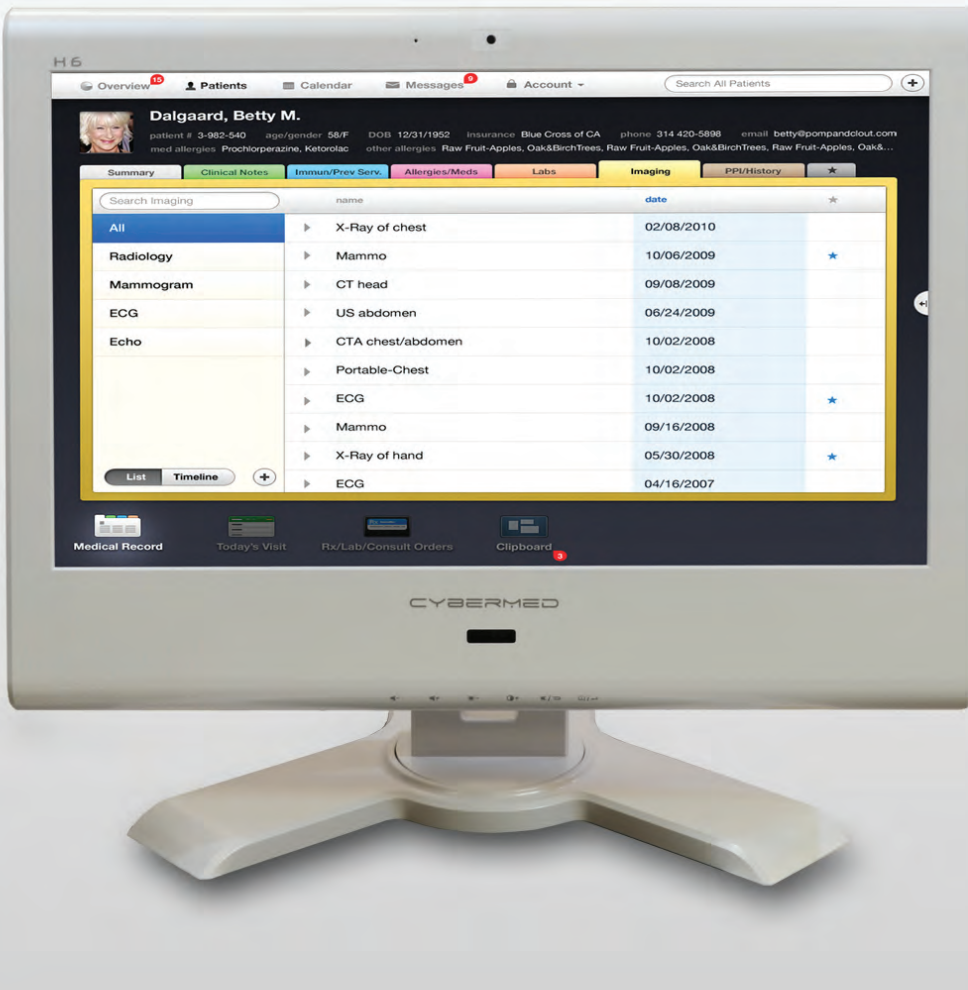

Corporate Headquarters
Cybernet Manufacturing
 5 Holland
 Irvine, CA 92618
 Toll free: 888-834-4577
 Local: 949-600-8000
 Fax: 949-600-8013
www.cybernetman.com
sales@cybernetman.com
support@cybernetman.com

Cybernet Europe
Network House, Hawkins Road
 Colchester, Essex CO2 8LA
 United Kingdom
 UK Phone: 0845-539-1200
 UK Fax: 0845-539-1201
www.cyberneteuropa.com
sales@cyberneteuropa.com
support@cyberneteuropa.com

Cybernet Taiwan Company, LTD.
 4F., No.25, Lane 140, Xingai Rd
 Neihu District, Taipei City 11494
 Taiwan (R.O.C.)
 Phone: (02) 2790-4776
 Fax: (02) 2793-3172
www.cybernet.com.tw
sales@cybernet.com.tw
support@cybernet.com.tw