Technical Specifications

HP Series 5 Pro 27" QHD Monitor - 527pq




1. Power Button

Front 2. Power LED



Technical Specifications

HP Series 5 Pro 27" QHD Monitor - 527pq

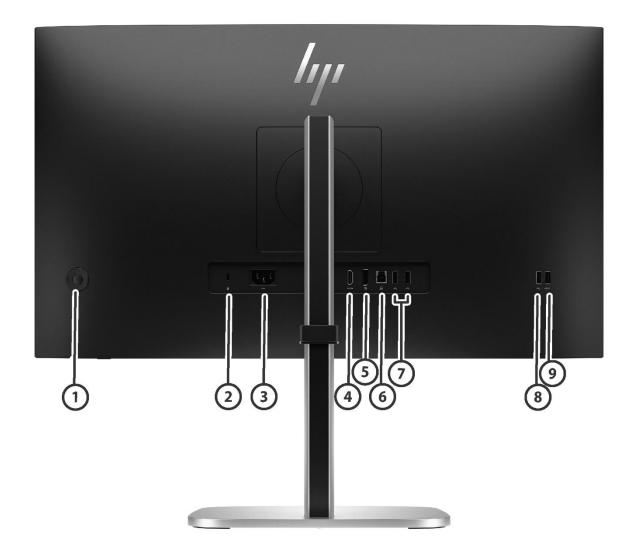

- 1. Joypad OSD button
- 2. Security Cable Slot
- 3. Power Connector
- 4. HDMI 2.0
- 5. DisplayPort[™] 1.2

Back


- 6. USB-B port
- 7. 2x SuperSpeed USB Type-A 5Gbps signaling rate
- 8. SuperSpeed USB Type-A 5Gbps signaling rate
- 9. SuperSpeed USB Type-A 5Gbps signaling rate (charging)



Technical Specifications

Model: 9D9S0UT

Panel Specifications	Display Size (Diagonal)	68.6 cm (27")
	Viewable Diagonal Size	68.47 cm (26.96")
	Panel Technology	IPS
	Curvature	Flat
	Max Refresh Rate	100 Hz
	Native Resolution	QHD (2560 x 1440)
	Panel Bit Depth	True 8 bit
	Aspect Ratio	16:9
	Brightness (Typical)	350 nits
	Display Contrast Ratio (Static)	1500:1
	Display Contrast Ratio (Dynamic)	1000000:1 = 10M:1
	Flicker Free	Yes
	Pixel Pitch	0.2331 x 0.2331 mm
	Pixels Per Inch (PPI)	109 PPI
	Display Colors	Up to 16.7 million colors supported
		*Number of colors through A-FRC technology.
	Backlight Lamp Life Minimum (To Half	30,000 hours
	Brightness - In Hours)	30,000 110015
	Backlight Type	Edge-lit, WLED
	Screen Treatment	Anti-glare
	Hardness	3H
	Haze	25%
	Response Time (Typical)	5ms GtG (with overdrive)
	Horizontal Viewing Angle	
	(Typical Cr>10)	178°
	Vertical Viewing Angle (Typical Cr>10)	178°
	Panel Active Area Metric (W X H)	59.67 x 33.57 cm
	Panel Active Area Imperial (W X H)	23.49 x 13.21 in
	NOTE: Performance specifications represent th	ne typical specifications provided by HP's component
	manufacturers; actual performance may vary e	either higher or lower.
Color	sRGB	100%
Color Monocoment		
Color Management	Color Space	RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2
	RGB Channel Adjust	Yes, Gain
	Default Color Temperature	Neutral (6500K)
Monitor Specifications	Bezel Type	3-sided borderless
Pointor Specifications	Color Of Stand	Black and Silver
	Color Of Head	Black
	Tilt	-5 to +20°
	Swivel	±45°
	Pivot	±45 ±90
	Height Adjust Range	±90 150 mm
	Neight Adjust Kange Vesa Mounting	100 mm x 100 mm
	-	
	Security Lock	Security lock-ready



Technical Specifications

	Detachable Stand	Yes
		3/3/0 for AMS, EMEA, APJ
	Warranty	(3/3/3 in select APJ countries)
	Low Blue Light	Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution certified)
	Zero Bright Dot Guarantee	No*
	Zelo Bright Dot Guarantee	*The HP Pixel Policy allows no bright sub-pixel defects for this
		display. For complete details, see http://support.hp.com/us-
		en/document/c00288895.
	Management Software	HP Display Manager, HP Display Center*
	-	*Host PC requires Windows 10 and above. HP Display Center is
		available on the Microsoft store.
On Screen Display	On Screen Display	Brightness+, Color, Input, Image, Power, Menu,
(OSD)	Native Resolution	Management, Information, Exit QHD (2560 x 1440)
	Maximum Resolution	QHD (2560 x 1440 @ 100 Hz)
	Preset Graphic Modes/Supported	640 x 480 @ 60Hz
	Resolutions	640 x 480 @ 75Hz
		720 x 400 @ 70 Hz
		720 x 480 @ 60Hz
		720 x 576 @ 50Hz
		800 x 600 @ 60 Hz
		800 x 600 @ 75 Hz
		1024 x 768 @ 60 Hz
		1024 x 768 @ 75 Hz
		1280 x 720 @ 50Hz
		1280 x 720 @ 60 Hz
		1280 x 720 @ 100 Hz
		1280 x 1024 @ 60 Hz
		1280 x 1024 @ 75 Hz
		1440 x 900 @ 60 Hz
		1600 x 900 @ 60 Hz
		1600 x 1200 @ 60 Hz
		1680 x 1050 @ 60 Hz
		1920 x 1080 @ 50Hz
		1920 x 1080 @ 60 Hz
		1920 x 1080 @ 75 Hz
		1920 x 1080 @ 100 Hz
		1920 x 1200 @ 60Hz
		2560 x 1440 @ 60 Hz
		2560 x 1440 @ 75 Hz
	Minimum Vortical Coan Data	2560 x 1440 @ 100 Hz
	Minimum Vertical Scan Rate Maximum Vertical Scan Rate	50 Hz
	Maximum Vertical Scan Rate Minimum Horizontal Scan Rate	100 Hz 30 kHz
	Minimum Horizontal Scan Rate	152 kHz
	Maximum Pixel Clock	420 MHz



Technical Specifications

	User Programmable Modes User-Assignable Function Buttons Languages	Yes, 21 Yes, 4 (6 options) 11 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese, S-Chinese and Russian)
Connector Types	DisplayPort™ HDMI HDCP USB-Type-A USB-B (Hub enablement)	1 DisplayPort™ 1.2 1 HDMI 2.0 Yes, DisplayPort™ and HDMI 4 SuperSpeed USB Type-A 5Gbps signaling rate (1 charging) 1 USB-B
Special Features	Switch User Presets User Updateable Firmware	Monitor Power button Next Active Input / Up button Information / Down button Brightness / Left button Color / Right button Menu / Enter button 21 Yes
Power & Operating Specs	Power Supply Power Source Power Consumption- Max Energy Saving/Stand By Mode Power Consumption - Typical	Internal 100 – 240 VAC 50/60 Hz 72 W 0.5 W 30 W
Energy Star Data	Operational Mode at 100 VAC Operational Mode at 115 VAC Operational Mode at 230 VAC	16.5 W 16.5 W 16.5 W
EU Energy Efficiency Class (ErP LOT-5)	On-mode Power Consumption for Standard Dynamic Range (SDR) ErP LOT5 Energy Efficiency Class for Standard Dynamic Range (SDR)	21.7 W
Operating Conditions	Operating Temperature - Celsius Operating Temperature - Fahrenheit Non-Operating Temperature - Celsius Non-Operating Temperature - Fahrenheit Operating Humidity Non-Operating Humidity Operating Altitude Metric Non-operating Altitude Metric Operating Altitude Imperial Non-operating Altitude Imperial	5~35°C 41– 95°F -40 – 65°C -40 – 149°F 20 – 80% Relative Humidity (non-condensing) 5~95%RH 0~5,000m 0~12,192m 0~16,400ft 0~40,000ft



Technical Specifico	ations	
Certifications and Compliances	Low Halogen	Yes*
Compriances		* External power supplies, WWAN modules, power cords, cables and peripherals excluded. Service parts obtained after purchase may not be Low Halogen.
	Agency Approvals and Certifications	WW application CE,CB,KC/KCC/NOM/PSB/PSE/ICES/TUV-S/ISO 9241- 307/cTUVus/GS/ISC/CCC/CEL/CECP/SEPA/TCO/TCO Certified Edge/TUV HW LBL/Energy Star/Korea MEPS/EAC/VCCI/FCC/BSMI/BIS/NRCS/UAE/Ukraine/Ukrain e EE/WEEE/ Australian or New Zealand DoC/EMF/California CEC/RCM
	Microsoft WHQL Certification	Windows 11 (x64 only), Windows 10 (x64 only)
	ENERGY STAR [®] Certified	Yes
	EPEAT [®] Registered	EPEAT [®] Gold in United States*
	Regions need to verify by country	EPEAT [®] registered with Climate+
		*EPEAT [®] Gold
		NOTE: Based on US EPEAT® registration according to IEEE
		1680.1-2018 EPEAT [®] . Status varies by country. Visit
		www.epeat.net for more information.
	China Energy Label	CEL Grade 2
	TCO Certified Edge	Yes
	TCO Certified	Yes
	SmartWay Transport Partnership - NA only	Yes (NA sku)
Contains Recycled	Recycled Plastics	85% ITE-derived closed loop plastic*
Materials		Contains Ocean-Bound Plastic**
		* Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard
		**All plastic parts contain ocean-bound plastic. Percentage of ocean-bound plastic contained in each component varies by product.
	Recycled Metal	At least 35% recycled metal* * Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for metal parts over 25 grams.
	Recycled Glass	20% recycled glass* * Percentage of recycled glass in the monitor panel varies by product. Recycled glass is expressed as a percentage of the total weight of the glass.
	Recyclable Packaging (Box, packing materials)	Outside Box and corrugated cushions are 100% sustainably sourced and recyclable* & Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable** *100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.



Technical Specifications

**Molded pulp cushions contains 100% recycled wood fiber and organic materials.

		<u>Metric</u>	<u>Imperial</u>
Unit Product/Package	Product Dimensions	61.34 x 22.89 x 54.38 cm	24.15 x 9.01 x 21.41 in
Specifications	(Unpacked with stand) (W x D x H)		
	Product Dimensions	69.9 x 16 x 44.6 cm	27.52 x 6.3 x 17.56 in
	(Packed) (W x D x H)		
	Display Head Dimensions	61.34 x 4.69 x 35.67 cm	24.15 x 1.85 x 14.04 in
	(Unpacked without stand) (W x D x H)		
	Base Area Footprint	255.96 x 206.96 mm	10.08 x 8.15 in
	(w x d mm)		
	Bezel Measurements	Тор: NA	Тор: NA
		Sides: NA	Sides: NA
		Bottom: 10.6 mm	Bottom: 4.17 in
	Product Weight	6.2 kg	13.7 lb
	(Unpacked with stand)		
	Product Weight	9.2 kg	20.3 lb
	(Packed)		
	Product Weight	4.6 kg	10.1 lbs
	(Head Only)		
Pallet Information	Pallet Dimensions	Slip Sheet: 1130 x 709 x	Slip Sheet: 44.49 x 27.91 x
	(L x W x H mm)	2242 mm (20' ft & 40' ft)	88.27 inch (20' ft & 40' ft)
		Slip Sheet: 1130 x 709 x	Slip Sheet: 44.49 x 27.91 x
		2242 mm (40 HQ)	88.27 inch (40 HQ)
		Pallet: 1130 x 709 x 1925	Pallet: 44.49 x 27.91 x
		mm (20' ft & 40' ft) Pallet: 1130 x 709 x 2371	75.79 inch (20' ft & 40' ft) Pallet: 44.49 x 27.91 x
		mm (40 HQ)	93.35 inch (40 HQ)
	Pallet Total Weight	Slip Sheet: 326.78 kg (20' ft	Slip Sheet: 720.42 lbs (20'
		& 40' ft)	ft & 40' ft)
		Slip Sheet: 326.78 kg (40	Slip Sheet: 720.42 lbs (40
		HQ)	HQ)
		Pallet: 273.54 kg (20' ft &	Pallet: 603.05 lbs (20' ft &
		40' ft) Pallet: 338.3 kg (40 HQ)	40' ft) Pallet: 745.83 lbs (40 HQ)
	Pallet Layers	5 layers per slip sheet	
		4 layers or 5 layer per pallet	
	Pallet Product per Layer	7 per layer (slip sheet)	
	Fallet Flouuct per Layer	7 per layer (pallet)	
	Total Products per Pallet	35 sets per slip sheet	
	· · · · · · · · · · · · · · · · · · ·	28 sets or 35 sets per pallet	
	Container Load, 20-Foot	560 sets (slip sheet)	
		448 sets (pallet) 1120 sets (slip sheet)	
	Container Load, 40-Foot	896 sets (pallet)	
	Containen Lood 40 Frat WirkO	1120 sets (slip sheet)	
	Container Load, 40-Foot HighQ	1120 sets (pallet)	
What's in the box?	AC power cord (1.83m) 5.9ft		
	HDMI 2.0 cable (1.8m) 5.9 ft		
	USB 3.0 B-A cable (1.8m)		



Technical Specifications

DisplayPort™ 1.2 cable (1.8m) Warranty Quick Setup Poster

User Guide and Warranty Languages

User Guide Languages

Warranty Languages

Arabic, Bahasa Indonesia, Bulgarian, Chinese-S, Chinese-T, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkey, Ukrainian English US (EN), English AP (EN-AP), English LA (EN-LA), English UK (EN-GB), Arabic (AR) -17x, Bahasa Indonesia (ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN), Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA), Dutch (NL), Estonian (ET), Finnish (FI), French Canadian (FC), French European (FR), German (DE), Greek (EL), Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA), Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT), Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR), Portuguese, Iberian (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovak (SK), Slovenian (SL), Spanish, Castilian (ES-ES), Spanish, Latin America (ES-MX), Swedish (SV), Thai (TH) Turkish (TR), Ukrainian (UK), Vietnamese (VI)



Technical Specifications

© Copyright 2024 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log		
	V1 to V2	
	V2 to V3	
	V3 to V4	

