


## USB-C Mini Dock and Multiport Adapter - 8K HDMI, USB 3.x Gen 2 (10Gbps) Hub Ports, Gigabit Ethernet, 100W PD Charging, HDR, HDCP 2.3

MODEL NUMBER: U442-DOCK40-6

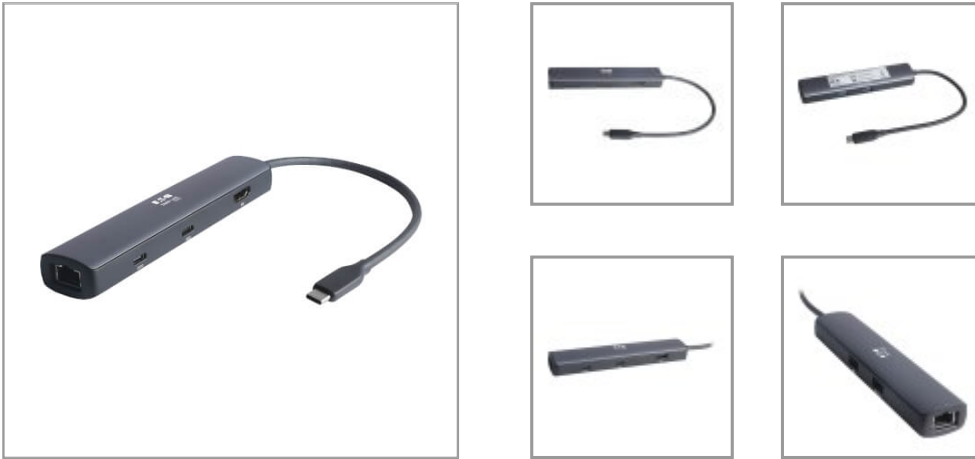

Adds 8K HDMI, 2 USB-A hub ports, Gigabit Ethernet and USB-C PD charging to your MacBook, Windows laptop or Chromebook.

### Features

#### USB-C Mini Dock Turns Your Device's USB-C or Thunderbolt 3 Port into a Multiport Workstation

This versatile 8K adapter adds multiple ports to the USB-C or Thunderbolt 3 port on your MacBook Pro, Windows laptop or Chromebook. The U442-DOCK40-6 allows you to transmit digital audio and 8K video to an external display, add USB peripherals, connect to a Gigabit Ethernet network, and power and charge a PD Charging-compliant host device simultaneously. It is ideal for future-proofing your high-definition or Ultra HD application in anticipation of an 8K upgrade.

#### Supports USB-C DisplayPort Alternate Mode for Transmitting Audio/Video Signals

By connecting the built-in USB-C cable to a source device that supports USB DisplayPort Alt Mode, you can output 8K video and digital audio to a compatible HDMI monitor, television or projector without installing special software drivers.

#### Enjoy the Clarity of 4K/8K Video with Multi-Channel Audio, HDR and 4:4:4 Color

The HDMI port supports 8K UHD resolutions up to 7680 x 4320 at 30 Hz for professional photo and video editing. It also supports High Dynamic Range (HDR10+), providing a wide range of vibrant colors with richer contrast, brighter whites and deeper blacks. HDCP 2.3 compliance allows you to stream 4K content with no complications. This adapter also supports 4:4:4 chroma subsampling for top-level PC gaming or using your HDTV as a PC monitor.

#### Connects USB Peripherals and Transfers Data at Fast USB 3.2 Gen 2 Speeds

Three USB 3.2 Gen 2 ports accept USB peripherals, such as flash drives, mice, keyboards and printers. They support lightning-fast data transfer rates up to 10 Gbps and are backward compatible with USB 2.0 and USB 1.1 devices. One USB-A port and the USB-C port provide up to 5V/1.5A (7.5W) of charging power to mobile devices. The other USB-A port provides 5V/0.9A (4.5W) to connected devices. The three ports support over-current, over-voltage, over-temperature and short circuit protection.

#### PD 3.0 Charging Port Charges High-Powered Devices via AC Wall Charger

The USB-C Power Delivery port provides power output up to 20V 5A (100W), which is sufficient for charging and powering the connected source device, such as a MacBook or Chromebook. Just connect the device's AC wall charger to the USB-C PD port.

### Highlights

- Supports UHD resolutions up to 8K @ 30 Hz (4:4:4) for state-of-the-art video quality
- Carries High Dynamic Range (HDR) signals for rich contrast and expanded color accuracy
- Supports 20V 5A (100W) power output for charging the host device during use
- USB hub ports support lightning-fast USB 3.2 Gen 2 (10 Gbps) data transfer rates
- Connects you to a wired Gigabit Ethernet network when Wi-Fi is weak or unavailable

### System Requirements

- Source device with USB-C or Thunderbolt 3 port that supports USB DisplayPort Alternate Mode
- Display device with HDMI input (or DVI input with use of HDMI-to-DVI adapter)
- Not for use with Thunderbolt monitors

### Package Includes

- U442-DOCK40-6 USB-C Multiport Adapter
- Owner's manual

**Accesses a Wired Gigabit Ethernet Network**

The dedicated RJ45 port offers access to a Gigabit Ethernet network when Wi-Fi is unavailable or when a wired connection offers faster speeds. Connect using a UTP cable (sold separately), and enjoy true 10/100/1000 Mbps Ethernet speeds for fast web browsing.

**Ready to Use Right from the Package, So You Can Plug and Play Immediately**

The plug-and-play USB-C multiport adapter is specifically designed for the MacBook Pro, Windows laptops and other notebooks, smartphones, tablets and devices equipped with a USB-C or Thunderbolt 3 port. It requires no extra software to be downloaded or installed. Its thin profile design fits easily into a pocket, purse or laptop bag for convenient connections on the go.

## Specifications

OVERVIEW	
UPC Code	037332282798
Product Type	USB Multiport Dock; Multiport Adapter
Device Compatibility	Chromebook; Computer; DVR; Laptop; Monitor/HDTV; Phone; Projector; Tablet
Technology	Cat5/5e; Cat6; HDMI; Thunderbolt; USB 3.x
Country/Region	Global
Host Connector	USB C (MALE)
VIDEO	
Video Input	USB C (MALE)
Video Output	HDMI (FEMALE)
Number of Monitors Supported	1
Video Ports	HDMI (FEMALE)
Video Ports Details	HDCP 1.4; DisplayPort 1.4; HDCP 2.3
Resolutions Supported	x1 HDMI port supports resolutions up to 8K (7680 x 4320) @ 30 Hz
Supported Resolutions	1280x720 (720p); 1920x1080 (1080p); 3840x2160 (4K); 5120x2880 (5K); 7680x4320 (8K)
Max Supported Video Resolution	7680 x 4320 (8K) @ 30 Hz
Recommended Cabling	<a href="#">P568-XXX-8K6 8K HDMI Cables</a>
Extended Mode	Yes
Extended Mode Details	Extends an HDMI video signal from a host which supports USB-C DisplayPort Alternate Mode at resolutions up to 8K/30 Hz.
Mirror Mode	Yes
Mirror Mode Details	Mirrors HDMI video from a host which supports USB-C DisplayPort Alternate Mode at resolutions up to 8K/30 Hz.
Max Supported Color Depth	36-bit Deep Color
HDR Support	Yes
3D Video Supported	Yes
Chroma Sub Sampling	4:2:2; 4:4:0; 4:4:4
EDID Support	Yes



Powering Business Worldwide

TRIPP LITE  
SERIES

DisplayPort Alt Mode	Yes
DSC Support	Yes
<b>DATA</b>	
Data Ports	(2) USB A (FEMALE); USB C (FEMALE)
Data Ports Details	(2) USB-A - USB 3.2 Gen 2 (10 Gbps); (1) USB-C - USB 3.2 Gen 2 (10 Gbps)
<b>NETWORK</b>	
Network Ports	RJ45 (FEMALE)
Network Ports Details	1 Gbps (Gigabit)
<b>INPUT</b>	
Input Plug Type	USB-C (MALE)
Input Cord Length (ft.)	0.66
Input Cord Length (m)	0.20
Bus Powered	Yes
<b>BATTERY</b>	
Battery Charging (5V/1.5A Port)	Yes
<b>POWER</b>	
Power Source Type	Bus; USB
USB Power Delivery (PD) Charging Support	Yes
USB Power Delivery (PD) Charging Specification	100W; 3.0
<b>CONNECTIONS</b>	
Number of Ports	6
Ports	1
Ports Detail	Connect to a wired Gigabit Ethernet network via the RJ45 port
Dock Connectors	(x2) USB-A Female; (x2) USB-C Female; (x1) HDMI Female
Side A - Connector 1	USB C (MALE)
Side B - Connector 1	HDMI (FEMALE)
Side B - Connector 2	(2) USB C (FEMALE)
Side B - Connector 3	(2) USB A (FEMALE)
Side B - Connector 4	RJ45 (FEMALE)
Connector Plating	Nickel
<b>CHARGING</b>	



Powering Business Worldwide

TRIPP LITE  
SERIES

Number of Charging Ports	4
Total Charging Amps	2.4A (USB Hub)
Total Charging Watts	100
Charging Port Type	(2) USB A (FEMALE); (2) USB C (FEMALE)
Charging Ports	(1) USB-A: 0.9A; (1) USB-A: 5V 1.5A (7.5W); (1) USB-C: 100W (20V 5A) Power Delivery (PD 3.0); (1) USB-C: 5V 1.5A (7.5W)
Charging Ports Details	(1) USB-C PD 3.0 charging port supports up to 100 Watts of total charging capacity, with 15 Watts dedicated to the unit itself and 85 Watts allocated for charging a connected host device(1) USB-C port supports 5V/1.5A (7.5W) charging to a connected device(1) USB-A port supports 5V/1.5A (7.5W) charging to a connected device(1) USB-A port supports 900mA (0.9A) maximum downstream chargingBoth USB-A ports and USB-C charging port share 12 Watts total charging capacityAll ports support short-circuit, over-current and over-voltage protection
Charging Ports / Amps	(1) 0.9A; (2) 1.5A; (1) 5A
Compatible Devices	Chromebook; Laptop; Smartphone; Tablet

**PHYSICAL**

Color	Gray
Material of Construction	TPE+PVC+ABS
Cable Jacket Color	Black
Connector Color	Black
Cable Jacket Material	TPE
Cable Jacket Rating	FT2
Cable Outer Diameter (OD)	5.0mm
Wire Gauge (AWG)	34+24
Cable Length (ft.)	0.66
Cable Length (m)	0.20
Cable Length (in.)	7.87
Housing Color	Gray
Cable Length (cm)	20
Total Number of Ports	6
Shipping Dimensions (hwd / in.)	0.87 x 7.87 x 3.54
Shipping Dimensions (hwd / cm)	2.21 x 19.99 x 8.99
Shipping Weight (lbs.)	0.22
Shipping Weight (kg)	0.10
Unit Dimensions (hwd / in.)	0.710 x 1.210 x 5.590
Unit Dimensions (hwd / cm)	1.8 x 3.05 x 14.2
Unit Dimensions (hwd / mm)	18 x 30.5 x 142
Unit Packaging Type	Box
Unit Weight (lbs.)	0.201
Unit Weight (kg)	0.09



Powering Business Worldwide

TRIPP LITE  
SERIES

ENVIRONMENTAL	
Operating Temperature Range	32° to 113°F (0° to 45°C)
Storage Temperature Range	50° to 158°F (-10° to 70°C)
Operating Humidity Range	10% to 85% RH, Non-Condensing
Storage Humidity Range	5% to 90% RH, Non-Condensing
Power Provided to Connected Device(s)	100W
COMMUNICATIONS	
Network Compatibility	1 Gbps (Gigabit)
FEATURES & SPECIFICATIONS	
Overcurrent Protection	Yes
Overvoltage Protection	Yes
USB Hub Ports	Yes
Number of USB Hub Ports	3
USB Specification	USB 3.2 Gen 2 (Up to 10 Gbps)
Data Transfer Rate	1 Gbps; 10 Gbps; 10 Mbps; 100 Mbps
MST Support	No
Network Speed Support	1 Gbps (Gigabit)
Ethernet Support	Yes
Auto MDIX Support	No
Full Duplex Support	Yes
Displayport Specification	1.4
HDCP Specification	1.4; 2.3
Driver Required	No
STANDARDS & COMPLIANCE	
TAA Compliant Option	N
Product Certifications	EN 55032; ICES (Canada); NOM (Mexico)
Product Compliance	CE (Europe); FCC Part 15 Class B (USA); REACH; RoHS3; UKCA; WEEE
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	1-year limited warranty



*Powering Business Worldwide*

TRIPP LITE  
SERIES

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.