


DIN-Rail Mounting Enclosure Module for Snap-In Keystone Jacks and Couplers, Left Cover, TAA

MODEL NUMBER: **N063-001-ENC-K1**

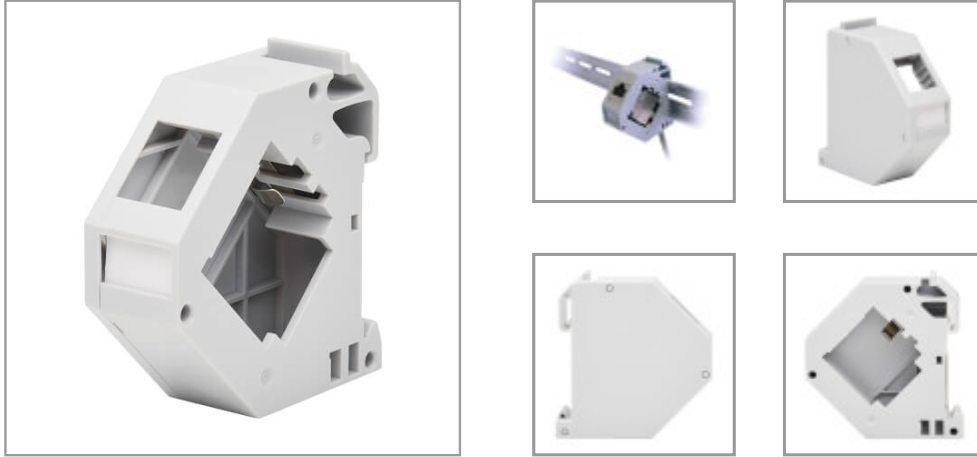

Accepts a snap-in keystone jack or coupler to help you manage your industrial DIN-rail network cable application.

Features

Organizes Ethernet Network Patch Cables in Your Industrial DIN-Rail Installation

This DIN-rail mounting module lets you manage network cable interconnectivity with one blank cutout, which accommodates all Tripp Lite snap-in keystone jacks and in-line couplers. Made from durable plastic with a phosphor bronze grounding spring, the N063-001-ENC-K1 is quick and easy to install on a standard 35-millimeter DIN rail using the built-in mounting clip.

Easy to Install in Rugged Industrial Applications

The N063-001-ENC-K1 is designed to allow side-by-side mounting for network applications. The plastic left cover protects the interior jack and cabling from harsh conditions. A designation label is included to help you identify the connection at a glance.

TAA-Compliant for GSA Schedule Purchases

The N063-001-ENC-K1 is compliant with the Federal Trade Agreements Act (TAA), which makes it eligible for GSA (General Services Administration) Schedule and other federal procurement contracts.

Highlights

- Durable plastic construction recommended for industrial Ethernet network applications
- Front blank cutout compatible with all Tripp Lite keystone jacks and couplers
- Plastic left cover and grounding contact spring help protect interior cable connection
- Built-in mounting clip attaches easily to standard 35 mm DIN rail with no tools needed
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

Package Includes

N063-001-ENC-K1 DIN-Rail Mounting Enclosure Module

Specifications

OVERVIEW	
UPC Code	037332276902
Technology	Cat5/5e; Cat6; Cat6a
Firmware / Software Docs	
Offset Ports	No
PHYSICAL	



Primary Form Factor	Din-Rail
Color	Gray
Material of Construction	Housing/Removable Enclosure Cover: PC FRV2 Plastic, Spring: Phosphor Bronze
Total Number of Ports	1
Shipping Dimensions (hwd / in.)	7.87 x 4.33 x 0.50
Shipping Weight (lbs.)	0.05
Unit Dimensions (hwd / in.)	2.320 x 2.390 x 0.850
ENVIRONMENTAL	
Operating Temperature Range	-13 to 122 F (-25 to 50 C)
Storage Temperature Range	-40 to 158 F (-40 to 70 C)
Operating Humidity Range	10% to 85% RH, Non-Condensing
Storage Humidity Range	10% to 85% RH, Non-Condensing
CONNECTIONS	
Number of Ports	1
Side A - Connector 1	KEYSTONE JACK CUTOUT
FEATURES & SPECIFICATIONS	
Keystone Jacks	Yes
All-in-One Kit	No
Down-Angled Ports	No
Built-in Cables	No
Color-Coded Connections	No
Numbered Ports	No
EIA/TIA 2/32 Spacing	No
Labeled Ports	Yes
DIN Mountable	Yes
IP68 Rated	No
Panel Applications	Ethernet
Antibacterial	No
IP20 Rated	No
STANDARDS & COMPLIANCE	
Product Compliance	CE (Europe); REACH; RoHS; UKCA
WARRANTY & SUPPORT	



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Product Warranty Period (Worldwide)	Lifetime limited warranty
--	---------------------------

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:
<https://www.tripplite.com/products/product-certification-agencies>