




Quick Installation Guide
RM237-C622LM



Cable List


Item	Description
A	SATA Cable (HDD) (L=650mm)
B	SATA Cable (HDD) (L=650mm)
C	Power Cable (4p to 4p, 2HDD) (L=270mm)
D	SGPIO Cable (2HDD) (L=650mm)
E	SMBus Cable (2HDD) (L=400mm)
F	3 x Mini SAS HD Cables (12HDD) (L=850mm)
G	SMBus Cable (12HDD) (L=400mm)
H	Power Cable (12p to 8px2, 12HDD) (L=400mm)
I	Front Panel Board Cable (Right, VGA+USB3.0) (L=1100/1210mm)
J	Front Panel Board Cable (Left, LED+USB2.0) (L=660/730mm)

System Front View

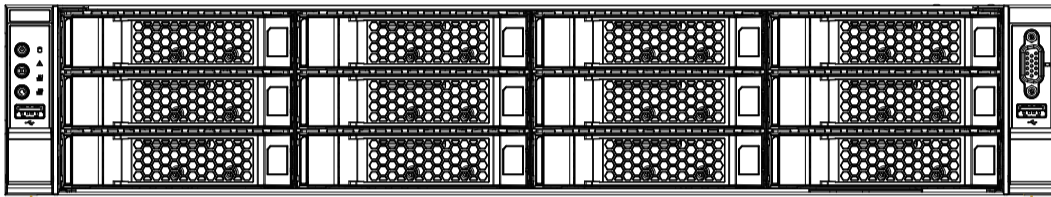


Front Panel Board Cable (Left, LED+USB2.0) (L=660/730mm) and Front Panel Board Cable (Right, VGA+USB3.0) (L=1100/1210mm)

Internal Features

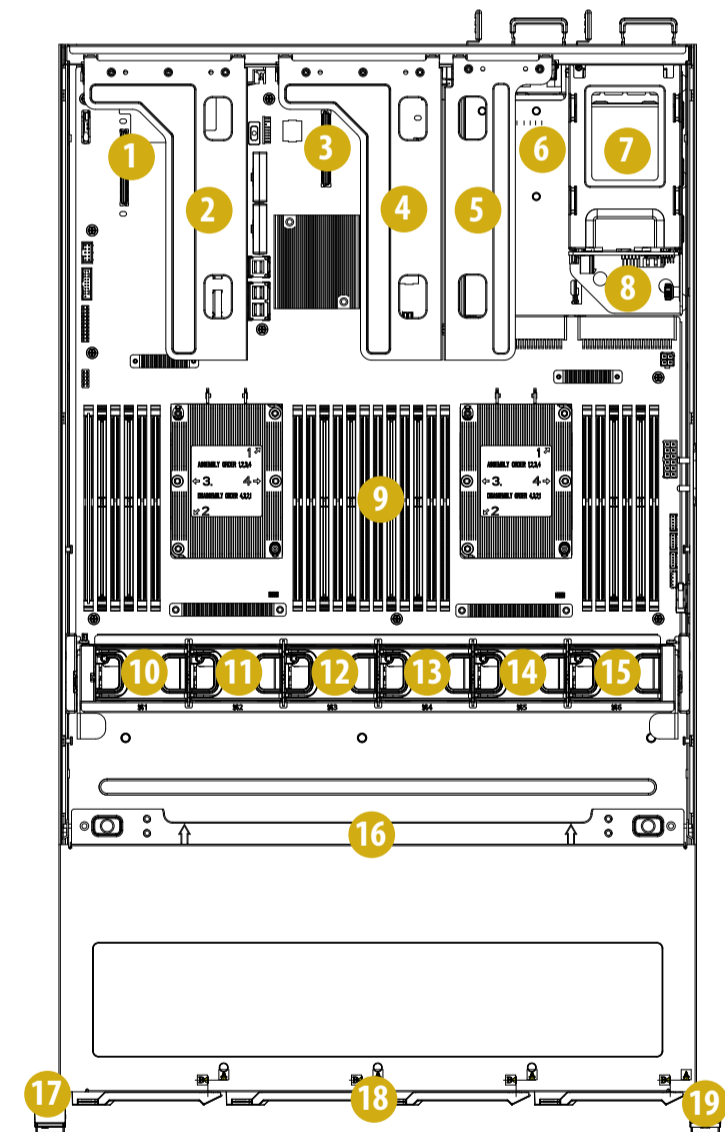


No.	From	No.	From
1	LAN Mezzanine Card Slot	12	System Fan 3 (Hot-swappable)
2	Riser Card Assembly 1	13	System Fan 4 (Hot-swappable)
3	Storage Mezzanine Card Slot	14	System Fan 5 (Hot-swappable)
4	Riser Card Assembly 2	15	System Fan 6 (Hot-swappable)
5	Riser Card Assembly 3	16	3.5" HDD Backplane Board (BPB)
6	2 x Power Supply Units	17	Front Control Panel (1 x USB 2.0 port)
7	2 x 2.5" SATA 3(6Gb/s)/ 2.5" SAS (12Gb/s) HDD (Hot-swappable)	18	12 x 2.5" or 3.5" SATA 3(6Gb/s)/ SAS (12Gb/s) HDDs
8	2.5" HDD Backplane Board (BPB)	19	Front I/O Ports (1 x USB 3.0 port & 1 x VGA port)
9	Serverboard		
10	System Fan 1 (Hot-swappable)		
11	System Fan 2 (Hot-swappable)		

Cable Connections

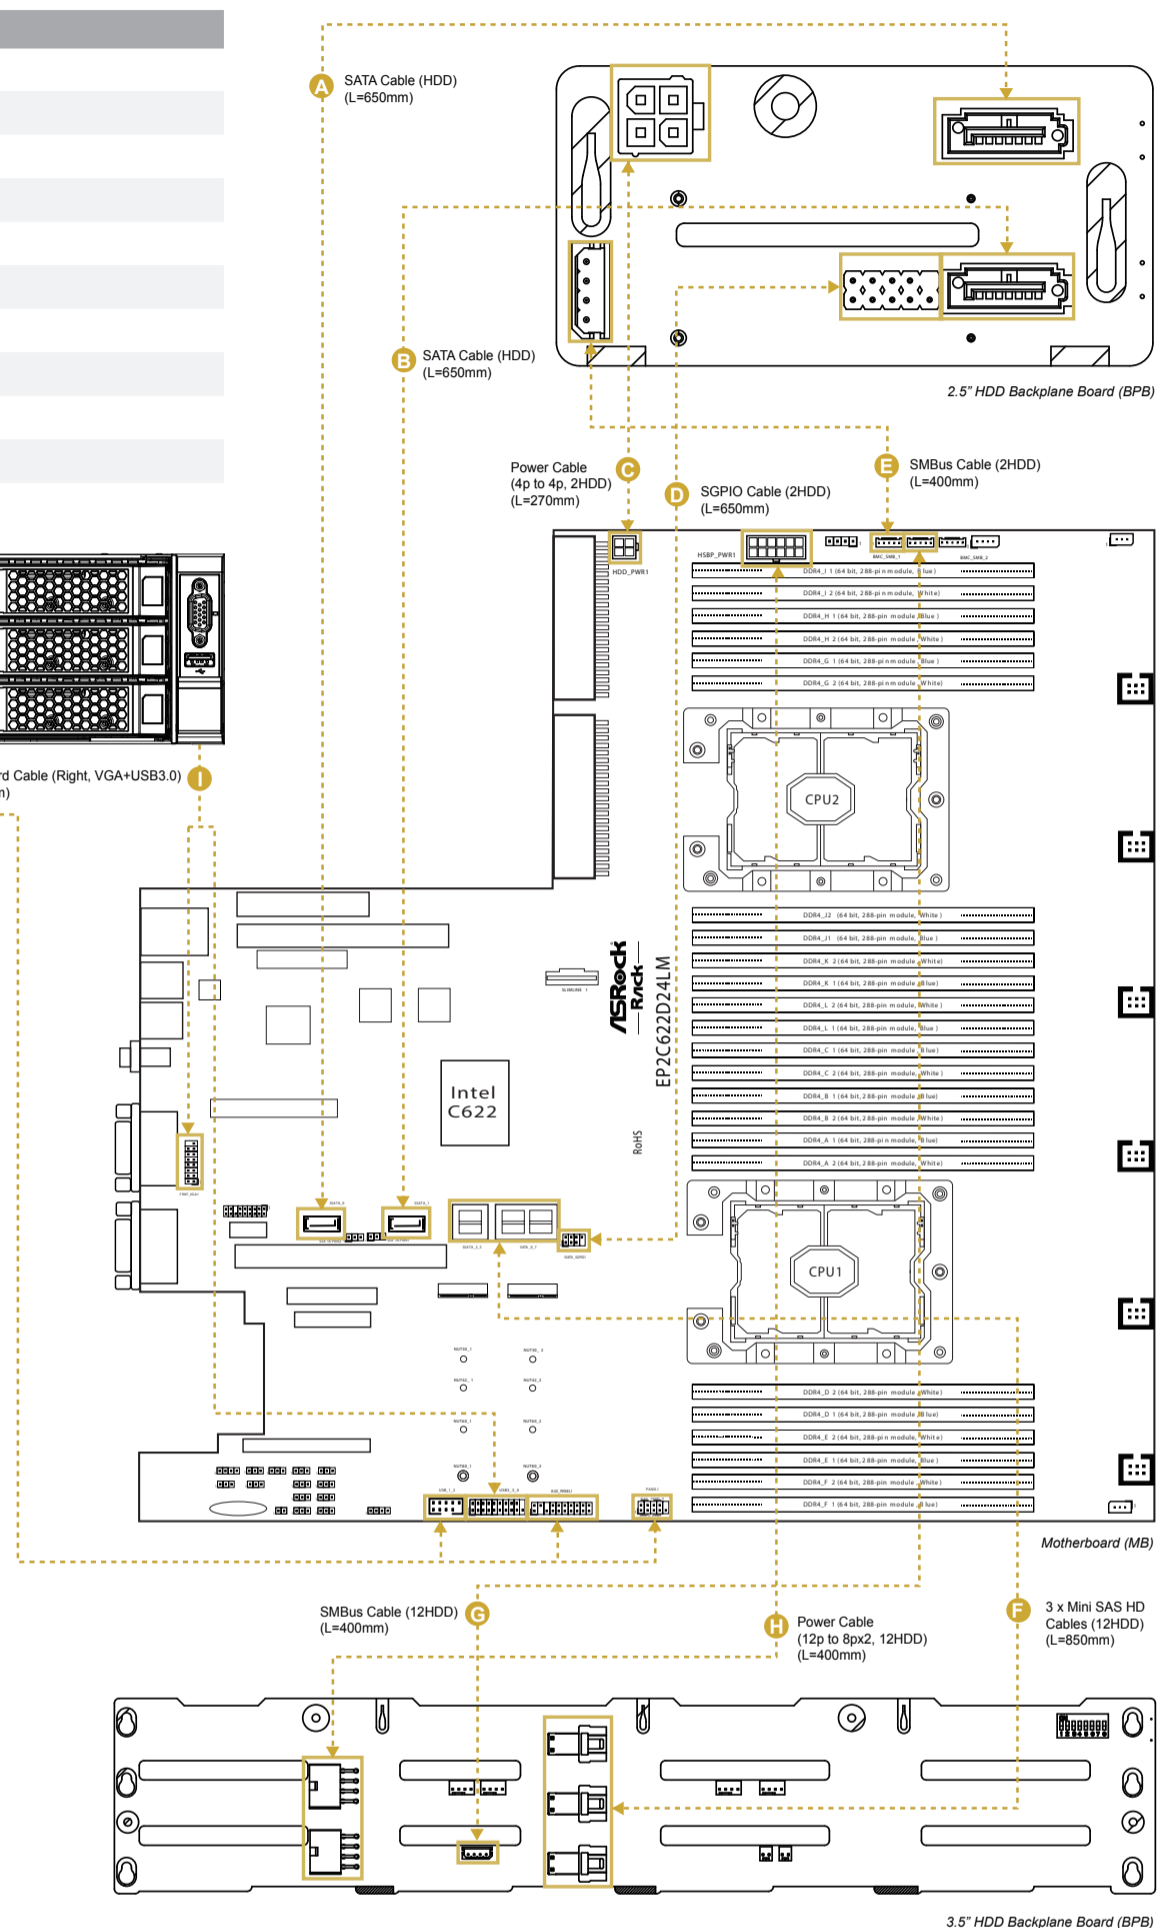

System Rear View (HDD Slots)

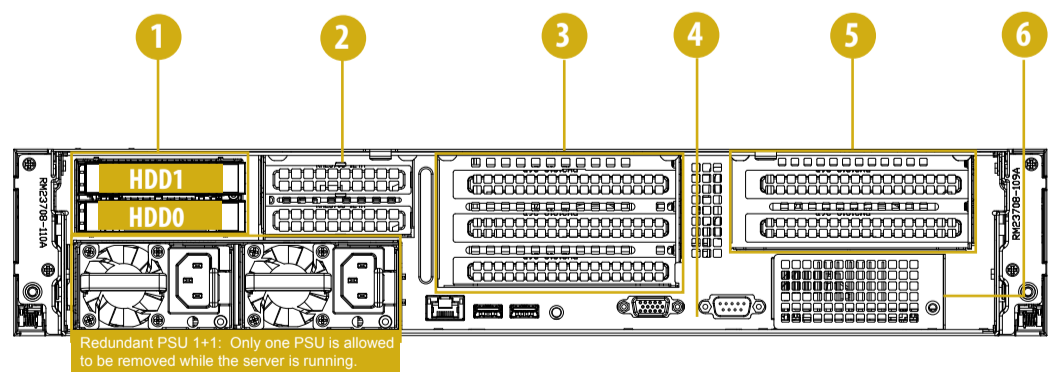

No.	Description
1	2 x 2.5" SATA 3(6Gb/s)/ 2.5" SAS (12Gb/s) HDDs
2	Add-on PCIE Card Slots (on Riser Card Assembly)
3	Add-on PCIE Card Slots (on Riser Card Assembly)
4	I/O Shield (depends on the specification of the server board)
5	Add-on PCIE Card Slots (on Riser Card Assembly)
6	Mezzanine Card Slot (Type A/B/C)