

GDPSP2

2-Port DisplayPort 1.2 Cinema 4K Splitter & Multi- Monitor MST Hub



- Connect 2 independent displays from a single DisplayPort 1.2 video output
- Mirror or extend a desktop across 2 displays from a computer with 1 DisplayPort output
- Enjoy Cinema 4K video resolutions up to 4096 x 2160 @ 60HZ

2-Port DisplayPort Cinema 4K Splitter and MST Hub


Connect two displays from a single DisplayPort 1.2-enabled computer with the IOGEAR 2-Port DisplayPort Splitter/MST Hub. Increase productivity and workflow by expanding the amount of usable screen space on two independent screens for multi-document viewing, media streaming, and content/web browsing, or mirror your computer's display across two monitors to allow remote viewing applications such as monitoring equipment diagnostics or the status of a remote server.

Cinema 4K Video Support

IOGEAR's 2-Port DisplayPort 1.2 Splitter and MST Hub supports Cinema 4K resolutions up to 4096 x 2160 @ 60Hz and is ideal for use with applications such as medical imaging, graphic design, gaming, and more.

- Connect 2 independent displays from a single DisplayPort 1.2 video output
- Mirror or extend a desktop across 2 displays from a computer with 1 DisplayPort output
- Enjoy Cinema 4K video resolutions up to 4096 x 2160 @ 60HZ
- With DisplayPort 1.2 Graphic Cards:
 - 2 Monitors: Up to 4K 4096 x 2160 (DisplayPort/HDMI)
- Supports 7.1 digital audio surround sound
- Push-button toggle between Single Stream Transport (SST) and Multi-Stream Transport (MST)
- DPCP and HDCP compliant
- No driver or software installation needed
- Supports DisplayPort 1.2a; HDCP 1.3



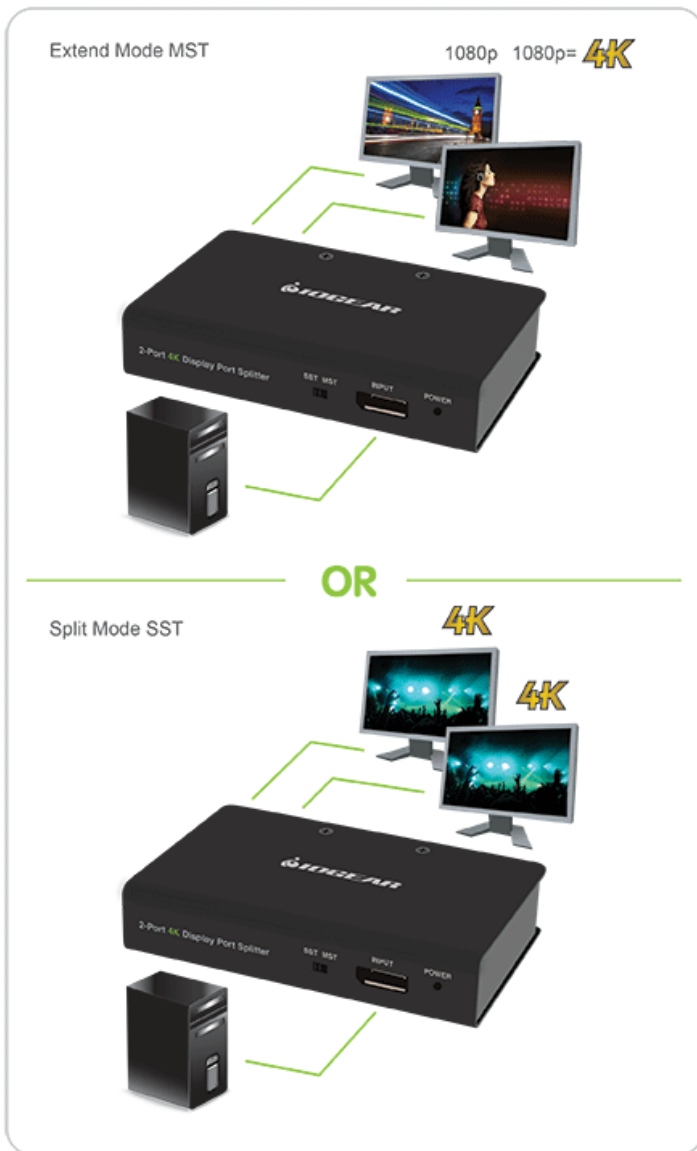

Requirements

- **Hardware:**
- Computer with DisplayPort 1.2 compatible graphics card
- 2 Monitors with DisplayPort ports
-
- **Optional:**
- G2LDPDP02 DisplayPort to DisplayPort Cable

Package Contents

- 1 x GDPSP2 2-Port DisplayPort Splitter / MST Hub
- 1 x Power Adapter
- 1 x Quick Start Guide
- 1 x Warranty Card

Specifications

Function	GDPSP2
Cable Connections	
Input	DisplayPort 1.2
Output	DisplayPort
Connectors	
Video Input	1 x DisplayPort Female
Video Output	2 x DisplayPort Female
Data Rate	Up to 5.4Gbps
Environment	
Humidity	20~90% RH (Non Condensing)
Operation Temperature	32°F~104°F (0°C~40°C)
Storage Temperature	-4°F~140°F (-20°C~60°C)
Housing	
Case	Metal
LEDs	
Input	1
Output	2
Power	
Amps	2A
Voltage	DC 5V
Video Resolution	Up to 4K@60Hz
Audio	
Codec	2-Ch LPCM / AC3 / DTS
Sample Rate	32-192kHz

Dimensions	GDPSP2
Unit Dimensions	
Height	1" (2.5 cm)
Depth	4.4" (11.1 cm)
Length	3" (7.6 cm)
Unit Package Dimensions	
Width	9.4" (23.8 cm)
Height	2.32" (5.9 cm)
Depth	6.3" (16 cm)
Master Carton	
Width	14.89" (37.8 cm)
Height	10.04" (25.5 cm)
Depth	7.17" (18.2 cm)
Master Carton Qty.	6
Weight	
Master Carton Wt.	8.95 lb
Unit Pack Wt.	1.3 lb (0.6 kg)
Unit Wt.	0.45 lb (0.2 kg)