

Key Features

SuperColor: Amazing Color Accuracy | 4000 Lumen



Brightness | Energy Efficient SuperEco | Network

Capable | Reduced Input Latency



Product Description


The ViewSonic® PG703X projector features 4,000 lumens, XGA 1024x768 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. An energy-saving SuperEco® feature reduces power consumption and extends the lamp life by up to 15,000 hours. A 10W speaker delivers incredibly clear and audible sound, while a top lamp door enables easy access for lamp maintenance. The PG703X is the ideal high brightness projector for use in both classroom and corporate settings.

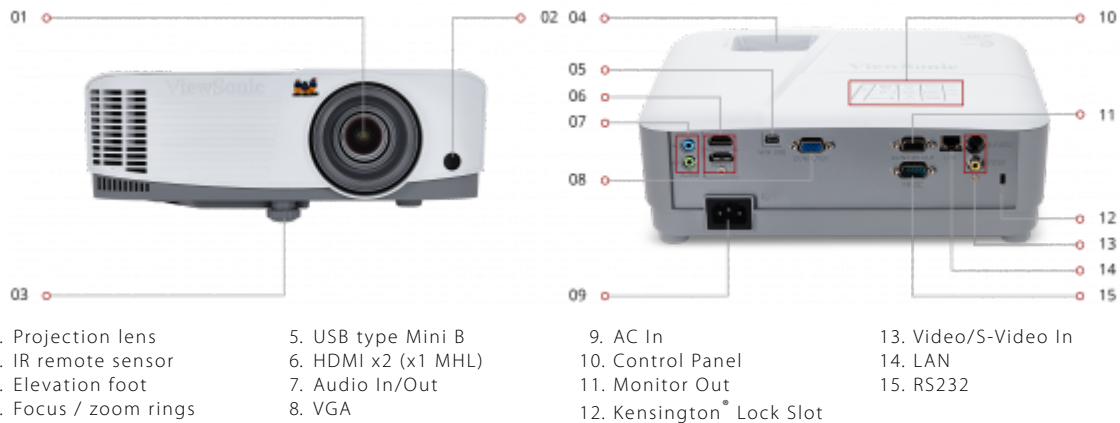

1024 x 768
RESOLUTION



4,000
LUMENS



1.96~2.15
THROW RATIO

Contact Sales

call: 888.881.8781

email: salesinfo@viewsonic.com

visit: viewsonic.com

Display:

Type:	DLP
Resolution Type:	XGA
Resolution:	1024 x 768
Brightness (ANSI Lumens):	4,000
Throw Distance:	3.90 - 43.01 ft / 1.19 - 13.11 m (100 in @ 13.06 ft)
Throw Ratio:	1.96~2.15
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Keystone:	Vertical (± 40°)
Lens:	1.1x optical zoom
Light Source (watt):	240
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	22000:1
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15k~102kHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	VGA(640 x 480) to FullHD(1920 x 1080)
Mac® Resolution (max):	VGA(640 x 480) to FullHD(1920 x 1080)

Connector:

Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI(1), HDMI MHL(1), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1)

Audio:

Internal Speakers:	10W
--------------------	-----

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	350W
Stand-by:	<0.5W

Operating Conditions:

Temperature:	32-104° F (0-40° C)
--------------	---------------------

Weight (imperial):

Net (lbs):	5.3
Gross (lbs):	7.5

Weight (metric):

Net (kg):	2.4
Gross (kg):	3.4

Dimensions (imperial) (WxHxD):

Packaging (in.):	14.37 x 11.81 x 7.4
Physical (in.):	11.57 x 8.58 x 4.33

Dimensions (metric) (WxHxD):

Packaging (mm):	365 x 300 x 188
Physical (mm):	294 x 218 x 110

General:

Regulations:	FCC (including ICES003), cTUVus
PACKAGE CONTENTS:	PG703X projector, power cable, VGA cable, remote control, Quick Start Guide, ViewSonic Wizard CD (with User Guide)
Warranty:	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
UPC:	766907916218

Accessories:

--	--