


HP Elite 6 G2i 14 inch Chromebook Plus



Front

- | | | | |
|---|-------------------------|---|------------|
| 1 | Internal Microphone (2) | 4 | Webcam LED |
| 2 | Webcam | 5 | Touchpad |
| 3 | Camera Shutter | | |

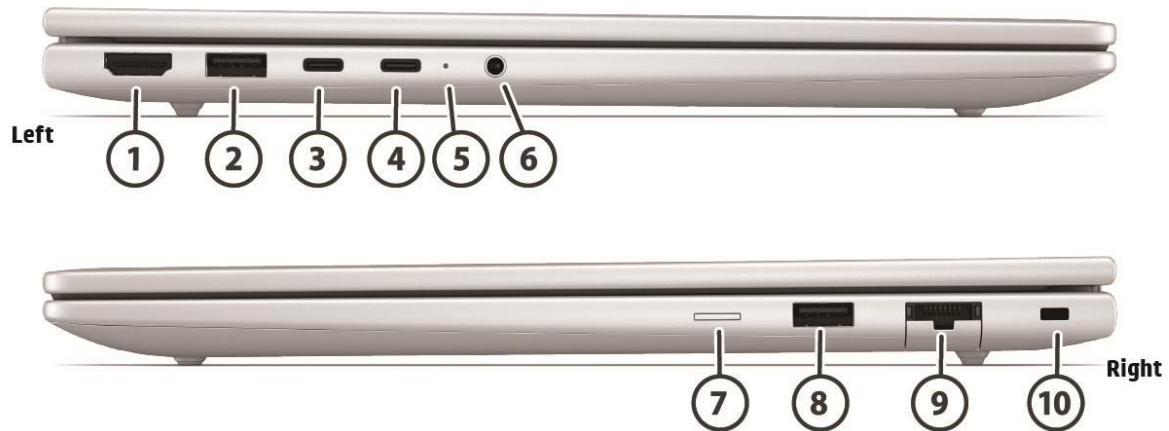

		Sides	
1	HDMI 2.0	7	Nano SIM card slot (optional)
2	USB Type-A 5Gbps signaling rate (Powered)	8	USB Type-A 5Gbps signaling rate (Powered) ¹
3	USB Type-C® 10Gbps signaling rate (USB Power Delivery, DisplayPort™ 1.4) ¹	9	RJ45 Ethernet port
4	USB Type-C® 10Gbps signaling rate (USB Power Delivery, DisplayPort™ 1.4) ¹	10	Nano Security slot
5	Power Indicator LED		
6	Headphone/mic combo jack		

1. USB 20Gbps signaling rate is not available with Thunderbolt™ 4. Actual throughput may vary.

PRODUCT NAME

HP Elite 6 G2i 14 inch Chromebook Plus



OPERATING SYSTEM

Preinstalled
ChromeOS Plus



PROCESSORS

Processor ^{1,2,3}	Cores	Number of P-cores	Number of E-cores	Threads	Smart Cache	Max Turbo Frequency		Intel® SIPP	Integrated Graphic
						P-cores	E-cores		
Intel® Core 7 processor 250U	10 cores	2	8	12	12 MB	5.40 GHz	4.00 GHz	X	Intel® Graphics
Intel® Core 5 processor 120U	10 cores	2	8	12	12 MB	5.00 GHz	3.80 GHz		Intel® Graphics
Intel® Core 5 processor 220U	10 cores	2	8	12	12 MB	5.00 GHz	3.80 GHz	X	Intel® Graphics
Intel® Core 3 processor 100U	6 cores	2	4	8	10 MB	4.70 GHz	3.30 GHz		Intel® Graphics

Processor Family

Intel® Core 7 processor

Intel® Core 5 processor

Intel® Core 3 processor

1. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel® numbering, branding, naming are not a measurement of clock speed.
2. Intel® Turbo Boost performance varies depending on hardware, software and overall system configuration.
3. For full Intel® vPro® functionality, Windows 10 Pro 64 bit, a vPro supported processor, vPro enabled chipset, vPro enabled wired LAN and/or WLAN card and TPM 2.0 are required. Some functionality requires additional 3rd party software in order to run. See <http://intel.com/vpro>



GRAPHICS

Integrated

Intel® Graphic

Supported protocols

Support HDCP 2.3, HDMI 2.0b

Display supported (including internal display; dock may be required) up to 4



DISPLAY

Availability may vary by country.

Actual brightness will be lower with touchscreen or HP Sure View.

Non-Touch

35.6 cm (14") diagonal, 2.5K (2560 x 1600), LCD, 120Hz (VRR), UWVA, , Anti-Glare, WLED+Low Blue Light, 400 nits, Adobe 100% + DCI-P3 100%

35.6 cm (14") diagonal, WUXGA (1920 x 1200), LCD, UWVA, Anti-Glare, WLED, 300 nits, Low Power, sRGB 62.5%

Touch

35.6 cm (14") diagonal, WUXGA (1920 x 1200), LCD, Touch on Panel, UWVA, Anti-Glare, WLED, 300 nits, Low Power, sRGB 62.5%

Display Size (Diagonal)

35.6 cm (14")

Aspect Ratio

16:10

Screen to Body Ratio

Up to 88.8%

Max Hinge Open Angle

177 ± 3°



DOCKING (SOLD SEPARATELY)

Docking station model name

HP Thunderbolt™ 100W G6 Dock

Total number of supported displays (incl.the notebook display)

4

Max. resolutions supported

(4) 4K @60Hz*

(2) 4K @ 120Hz*

(3) QHD @ 120Hz*

(1) QHD @ 360Hz*

Dock Connectors

1 x HDMI 2.1, 2 x DisplayPort 1.4, 1 x Thunderbolt 4

Technical limitations

*Requires DisplayPort 1.4 support with Display Stream Compression (DSC).

Bluetooth required for HP Quick Connect. HP Quick Connect available on select HP notebooks.

Maximum resolution and display support is dependent on the maximum capability of the notebook.

Thunderbolt Hosts:

Maximum of (4) displays with maximum resolution of 5K@ 30Hz running Thunderbolt host.

Maximum resolution possible is dual 8K displays @ 60Hz running Thunderbolt host or running a non-Thunderbolt host in high resolution mode @30Hz

Non-Thunderbolt hosts:

The highest resolution for dual displays running a non-Thunderbolt host in multi-function mode is

(1) 5K dual cable (using both DP ports) +(1) 4K on USB-C DP port

Non-Thunderbolt hosts support (3) displays with a maximum resolution of (2) 5K single cable + (1) 4K UHD @ 60 Hz in high resolution mode. In multi-function mode the maximum resolution for (3) displays is (2) 5K single cable @ 30Hz + (1) 4K UHD @ 30Hz.

Docking station model name

HP USB-C™ 100W G6 Dock

Total number of supported displays (incl.the notebook display)

3

Max. resolutions supported

(1) 4K @120hz*



- (2) 4K @120hz*
- (3) 4K @60hz*

Dock Connectors

1 x HDMI 2.1, 2 x DisplayPort 1.4

Technical limitations

*Requires DisplayPort 1.4 support with Display Stream Compression (DSC).

Bluetooth required for HP Quick Connect. HP Quick Connect available on select HP notebooks.

Maximum resolution and display support is dependent on the maximum capability of the notebook.

Highest resolution with dual displays is two 8K@ 60Hz host in High Resolution mode.

Three maximum displays supported are two 5K@ 30 Hz on DP ports plus one 4K UHD@ 30 Hz on HDMI in Multi-function mode

The highest resolution for a non-Thunderbolt host in Multi-function mode is a single 5K dual cable (using both DP ports) + (1) 4K on HDMI port.

Docking station model name

HP Thunderbolt™ 180W G6 Dock

Total number of supported displays (incl.the notebook display)

4

Max. resolutions supported

- (4) 4K @60Hz*
- (2) 4K @ 120Hz*
- (3) QHD @ 120Hz*
- (1) QHD @ 360Hz*

Dock Connectors

1 x HDMI 2.1, 2 x DisplayPort 1.4, 1 x Thunderbolt 4, 1 x USB-C 3.2 Gen 2 DisplayPort

Technical limitations

*Requires DisplayPort 1.4 support with Display Stream Compression (DSC).

Up to 180W of power delivery via Thunderbolt 4 cable to notebooks that support PD 3.1.

Bluetooth required for HP Quick Connect. HP Quick Connect available on select HP notebooks.

Maximum resolution and display support is dependent on the maximum capability of the notebook.

Thunderbolt Hosts:

Maximum of (4) displays with maximum resolution of 5K@ 30Hz running Thunderbolt host.

Maximum resolution possible is (2) 8K @ 60Hz running TBT host or running a non-TBT host in high resolution mode @30Hz



Docking station model name

HP Thunderbolt™ 280W G6 Dock

Total number of supported displays (incl.the notebook) display)

4

Max. resolutions supported

(4) 4K @60Hz*

(2) 4K @ 120Hz*

(3) QHD @ 120Hz*

(1) QHD @ 360Hz*

Dock Connectors

1 x HDMI 2.1, 2 x DisplayPort 1.4, 1 x Thunderbolt 4, 1 x USB-C 3.2 Gen 2 DisplayPort

Technical limitations

*Requires DisplayPort 1.4 support with Display Stream Compression (DSC).

Up to 180W of power delivery via Thunderbolt 4 cable to notebooks that support PD 3.1.

Bluetooth required for HP Quick Connect. HP Quick Connect available on select HP notebooks.

Maximum resolution and display support is dependent on the maximum capability of the notebook.

Thunderbolt Hosts:

Maximum of (4) displays with maximum resolution of 5K@ 30Hz running Thunderbolt host.

Maximum resolution possible is (2) 8K @ 60Hz running TBT host or running a non-TBT host in high resolution mode @30Hz



STORAGE AND DRIVES

Storage

- 1 TB PCIe® NVMe™ SSD Value ⁴
- 512 GB PCIe® NVMe™ SSD Value ⁴
- 256 GB PCIe® NVMe™ SSD Value ⁴
- 128 GB UFS ⁴

4. For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32 GB is reserved for system recovery software.



MEMORY

Maximum Memory

32GB LPDDR5X - 8533 MT/s (onboard)

Memory ⁵

32GB LPDDR5X - 8533 MT/s (onboard)

16GB LPDDR5X - 8533 MT/s (onboard)

8GB LPDDR5 - 6400 MT/s (onboard)

Memory Slots

No memory slots. Memory soldered down.

System runs at 5200 MT/s

Memory is non-accessible / non-upgradeable.

5. Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.



NETWORKING /COMMUNICATIONS

Items below may be optional.

Ethernet

RTK GBE Ethernet Controller

WLAN

Intel® AX211 Wi-Fi 6E Bluetooth® 5.3 WW WLAN with Internal Antenna

Intel® BE200 Wi-Fi 7 Bluetooth® 5.4 non-vPro® WW WLAN ⁶

WWAN

HP R15 5G Solution ⁷

Miracast

Chromecast Support ⁸

6. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 7 (802.11BE) functionality requires compatible Windows OS, select Intel® processor, and a Wi-Fi 7 router, sold separately. Wi-Fi 7 is backwards compatible with prior 802.11 specs. Available in countries where Wi-Fi 7 is supported. The specification for 802.11BE is a draft specification and is not final. If the final specification differs from the draft specification, it may affect the ability of the device to communicate with other 802.11BE devices.

7. 5G module is optional and must be configured at the factory. Module designed for 5G NR NSA (non-standalone) networks as carriers deploy Evolved-Universal Terrestrial Radio Access New Radio Dual Connectivity (ENDC) with both 100Mhz of 5G NR and LTE channel bandwidth, using 256QAM 4x4 as defined by 3GPP. Module requires activation and separately purchased service contract. Check with service provider for coverage and availability in your area. Data connection, upload and download speeds will vary due to network, location, environment, network conditions, and other factors. Backwards compatible to 4G LTE and 3G HSPA technologies. 5G module planned to be available in select platforms and select countries, where carrier supported.

8. Chromecast must be purchased separately.



AUDIO/MULTIMEDIA

Audio

Audio by Poly Studio

2 Integrated stereo speakers

2 Integrated dual array microphone

Speaker Power

2W / 4 ohm per speaker

Camera

FHD HDR camera; 5MP HDR camera

Sensors

Fingerprint Sensor (optional)

Hall Effect Sensor



KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

HP Standard Keyboard, spill-resistant, DuraKey keyboard

HP Standard Keyboard, spill-resistant, Backlit, DuraKey keyboard

Pointing Device

Multi-touch gesture support

Taps enabled as default

Function Keys

ESC - Escape

F1 - Back

F2 - Refresh

F3 - Full screen

F4 - Overview

F5 - Screenshot

F6 - Display Brightness Down

F7 - Display Brightness Up

F8 - Dictation; Keyboard Brightness Down (For Backlit Keyboard)

F9 - Accessibility; Keyboard Brightness Up (For Backlit Keyboard)

F10 - Media Playback Controls; Dictation (For Backlit Keyboard)

F11 - Media Playback Controls; Accessibility (For Backlit Keyboard)

F12 - Media Playback Controls

F13 - Audio Mute

Power Button (with LED)

Volume Down

Volume Up



SOFTWARE AND SECURITY

Application Software

HP Support Assistant

Manageability Features

Chrome Education Upgrade ⁹

Chrome Enterprise Upgrade ¹⁰

Security Features

Dauntless Security Chip

Security lock slot (Lock sold separately)

Zero-touch enrollment ¹¹

Security- TPM

Model: H1D3C

Firmware Version

Firmware Version: 0.0.58

TCG

FIPS 140-2 Compliant

FIPS 140-2 Compliant: No

IPv6 Support

Yes

FirstNet Certified

No

Does the BIOS implement the ISO/IEC 19678:2015 (formerly NIST 800-147) guidelines?

Yes

9. Chrome Education Upgrade requires one-time setup, subscription, Google Admin Console, and your organization's domain. Please see <https://support.google.com/a/answer/60216><https://support.google.com/a/answer/60216>.

10. Chrome Enterprise Upgrade requires one-time setup, subscription, Google Admin Console, and your organization's domain. Please see <https://support.google.com/a/topic/1409901>.

11. ZTE requires separately purchased HP Get More Service. HP Services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local



laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.



POWER

Power supply availability may vary by country.

Battery is internal and replaceable by customer. Serviceable by warranty.

Power Supply

65W Wall Mount USB Type-C® GaN Halogen Free AC power adapter

65W Standard USB Type-C® GaN AC power adapter

45W Standard USB Type-C® GaN AC power adapter

Battery

HP Long Life 3 cell, 68Wh Polymer

HP Long Life 3 cell, 56Wh Polymer

Battery Recharge Time

Supports battery HP Fast Charge: approximately 50% in 30 minutes ¹²

Power Cord

3-wired plug- 1.0m for standard type adapter

Battery life

17.5 hours ¹³

12. Recharges your battery up to 50% within 30 minutes when the system is off or in standby mode. Power adapter minimum of 65 watts required for battery capacities 56Whr or less. Power adapter minimum of 100 watts required for battery capacities greater than 56Whr and less than 83Whr. Power adapter minimum of 120 watts required for battery capacities greater than 83Whr and less than 100Whr. After charging has reached 50% capacity, charging will return to normal. Charging time may vary +/-10% due to System tolerance.

13. MobileMark 30 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See <http://www.bapco.com> for additional details.



WEIGHT & DIMENSIONS

Weight will vary by configuration. Does not include power adapter.

Front height measurement is near the front edge where the mechanical chassis taper begins. Back height measurement is near the rear edge where the mechanical chassis taper ends.

Product Weight

Starting at 1.33 kg (2.93 lb) with 56.00 Wh battery

Starting at 1.39 kg (3.06 lb) with 68.00 Wh battery

Product Dimensions (w x d x h) ¹⁴

Width: 318.60 mm (12.54 in)

Depth: 224.35 mm (8.83in)

Height Front: 11.82 mm (0.47 in)

Height Rear: 16.89 mm (0.67 in)

Maximum Height: 20.90 mm (0.82 in)

Packaging and Pallet Dimensions

Product packaging size varies based on options chosen. Please contact your HP representative for your packaging size details. For detailed packaging information, access the [HP Commercial Notebooks Packaging Guide](#).

14. Typical dimension. Actual dimension may vary +/- 0.5mm. Height may vary based on configuration. Maximum Height does not include Rubber feet.



PORTS/SLOTS

Left side

- 2 x USB Type-C® 10Gbps signaling rate (USB Power Delivery, DisplayPort™ 1.4) ¹⁵
- 1 x USB Type-A 5Gbps signaling rate (Powered)
- 1 x HDMI 2.0
- 1 x headphone/mic combo jack

Right side

- 1 x USB Type-A 5Gbps signaling rate (Powered) ¹⁵
- 1 x RJ45 Ethernet port
- 1 x Nano SIM card slot (optional)
- 1 x Nano Security slot

¹⁵. USB 20Gbps signaling rate is not available with Thunderbolt™ 4. Actual throughput may vary.



SERVICE AND SUPPORT ¹⁶

1-year warranty and 90 day software limited warranty options depending on country. HP Worldwide Limited Warranty for the battery is aligned with the warranty period of the HP Hardware Product. Refer to <http://www.hp.com/support/batterywarranty/> for additional battery information. On-site service and extended coverage is also available. HP Care Pack Services are optional extended service contracts that go beyond the standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/cpc>.

16. HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit <http://www.hp.com/go/cpc>. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.



SYSTEM UNIT

Stand - Alone Power Requirements

(AC Power)

Nominal Operating Voltage	20.0 V
Max Operating Power	UMA < 15 W

Temperature

Operating	5° to 35° C (41° to 95° F) No sustained direct exposure to sunlight, System performance may be reduced above 32°C (89.6°F)
Non - operating	-20° to 60° C (-4° to 140° F) No sustained direct exposure to sunlight, System performance may be reduced above 32°C (89.6°F)

Relative Humidity

Operating	10% to 90% (non-condensing)
Non - operating	5% to 95%, 38.7° C (101.6° F) maximum wet bulb temperature

Shock

Operating	40 G, 2 ms, half-sine
Non - operating	240 G, 2 ms, half-sine

Random Vibration

Operating	1.043 grms
Non - operating	3.500 grms
Altitude(unpressurized)	
Operating	3,048 m (10,000 ft)
Non - operating	12,192 m (40,000 ft)

Industry Standard Certifications

Regulatory Model Number	TPN-Q310
CSA/UL 62368-1	Yes
ENERGY STAR® 17	Yes
FCC/ICES/CISPR/VCCI	Yes
CE MARKING	Yes
GS Mark	No
China CCC/SRRC/CEL	No
Taiwan BSMI/NCC	Yes
Korea KCC/KC/KES	Yes
Ukraine NSoC/TEC	Yes
EAEU Compliance	Yes
Saudi Arabian Compliance	Yes
TCO	Yes
EPEAT Gold 18	Yes
Low Blue Light	No
WW RoHS	Yes



QuickSpecs

HP Elite 6 G2i 14 inch Chromebook Plus

CECP	No
Medical EMC: IEC 60601-1-2:2014 EN60601-1-2: 2015	No
SEPA	No
MIL - STD Testing ¹⁹	MIL-STD 810H

17. Configurations that are ENERGY STAR® qualified are identified as ENERGY STAR on HP websites and on <http://www.energystar.gov>

18. Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit <http://www.epeat.net> for more information.

19. MIL STD testing is not intended to demonstrate fitness for U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Accidental damage requires an optional HP Accidental Damage Protection Care Pack.



DISPLAYS

Actual brightness will be lower with touchscreen or HP Sure View.

Availability may vary by country

35.6 cm (14") diagonal, 2.5K (2560 x 1600), LCD, 120Hz (VRR), UWVA, , Anti-Glare, WLED+Low Blue Light, 400 nits, Adobe 100% + DCI-P3 100%

Active Area	301.594 x 188.496 mm (typ)
Dimensions (W x H)	306.890 x 197.900 mm (max)
Weight	200 g (max)
Diagonal Size	14 inch
Surface Treatment	Anti-Glare
Touch Enabled	No
Contrast Ratio	2000:1 (typ)
Refresh Rate	120 typ
Brightness	400 nits (typ)
Pixel Resolution	RGB
Pixel Resolution - Format	2560 x 1600 (2.5K)
Aspect Ratio	16:10
Backlight	WLED
Color Gamut Coverage	Adobe RGB 100% + DCI-P3 100%
Color Depth	8
Viewing Angle	89/89/89/89
Low Blue Light	Yes
Power Consumption	EBL@230: 3.1W (Max)

35.6 cm (14") diagonal, WUXGA (1920 x 1200), LCD, UWVA, Anti-Glare, WLED, 300 nits, Low Power, sRGB 62.5%

Active Area	301.590 x 188.500 mm (typ)
Dimensions (W x H)	307.290 x 198.850 mm (max)
Weight	300 g (max)
Diagonal Size	14 inch
Surface Treatment	Anti-Glare
Touch Enabled	No
Contrast Ratio	1000:1 (typ)
Refresh Rate	60 Hz
Brightness	300 nits (typ)
Pixel Resolution	RGB
Pixel Resolution - Format	1920 x 1200 (WUXGA)
Aspect Ratio	16:10
Backlight	WLED
Color Gamut Coverage	sRGB 62.5%
Color Depth	8
Viewing Angle	89/89/89/89
Low Blue Light	No



QuickSpecs

HP Elite 6 G2i 14 inch Chromebook Plus

35.6 cm (14") diagonal, WUXGA (1920 x 1200), LCD, Touch on Panel, UWVA, Anti-Glare, WLED, 300 nits, Low Power, sRGB 62.5%	Power Consumption	EBL@150: 1.7W (Max) EBL@200: 2.1W (Max) EBL@250: 2.5W (Max)
	Active Area	301.590 x 188.500 mm (typ)
	Dimensions (W x H)	307.59 x 199.15 mm (max)
	Weight	300 g (max)
	Diagonal Size	14 inch
	Surface Treatment	Anti-Glare
	Touch Enabled	Yes
	Contrast Ratio	1000:1 (typ)
	Refresh Rate	60 typ
	Brightness	300 nits (typ)
	Pixel Resolution	RGB
	Pixel Resolution - Format	1920 x 1200 (WUXGA)
	Aspect Ratio	16:10
	Backlight	WLED
	Color Gamut Coverage	sRGB 62.5%
	Color Depth	8
	Viewing Angle	89/89/89/89
Low Blue Light	No	
Power Consumption	EBL@150: 1.75W (Max) EBL@200: 2.15W (Max)	



STORAGE

1 TB PCIe® NVMe™ Value 2280 Solid State Drive ²⁰

Form Factor	M.2 2280
Capacity	1TB
NAND Type	TLC
Weight	15.0 g (0.03 lb)
Interface	PCIe NVMe
Sequential Read	2200 MB/s ± 20% (in PCIe Gen3x2/Gen3x4 slot)
Sequential Write	1600 MB/s ± 20% (in PCIe Gen3x2/Gen3x4 slot)
Logical Blocks	2000409264
Features	Pyrite 2.0; TRIM; L1.2 Not all features are available in all versions

512 GB PCIe® NVMe™ Value 2280 Solid State Drive ²⁰

Form Factor	M.2 2280
Capacity	512GB
NAND Type	TLC
Weight	15.0 g (0.03 lb)
Interface	PCIe NVMe
Sequential Read	3500 MB/s ± 20% (in PCIe Gen4x4 slot)
Sequential Write	1600 MB/s ± 20% (in PCIe Gen4x4 slot)
Logical Blocks	1000215216
Features	Pyrite 2.0; TRIM; L1.2 Not all features are available in all versions

256 GB PCIe® NVMe™ Value 2280 Solid State Drive ²⁰

Form Factor	M.2 2280
Capacity	256GB
NAND Type	TLC
Weight	15.0 g (0.03 lb)
Interface	PCIe NVMe
Sequential Read	3100 MB/s ± 20% (in PCIe Gen4x4 slot)
Sequential Write	1200 MB/s ± 20% (in PCIe Gen4x4 slot)
Logical Blocks	500118192
Features	Pyrite 2.0; TRIM; L1.2 Not all features are available in all versions

²⁰. For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 32 GB is reserved for system recovery software.



NETWORKING / COMMUNICATION

Intel® AX211 Wi-Fi® 6 Bluetooth® 5.3 WW WLAN with Internal Antenna	Wireless LAN Standards	IEEE 802.11a IEEE 802.11ac IEEE 802.11ax IEEE 802.11b IEEE 802.11d IEEE 802.11e IEEE 802.11g IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11n IEEE 802.11r IEEE 802.11v
	Interoperability Frequency Band	Wi-Fi certified 802.11b/g/n/ax/be 2.402 – 2.482 GHz 802.11a/n/ac/ax/be 4.9 – 4.95 GHz (Japan) 5.15 – 5.25 GHz 5.25 – 5.35 GHz 5.47 – 5.725 GHz 5.825 – 5.850 GHz 5.955 – 6.415 GHz 6.435 – 6.515 GHz 6.535 – 6.875 GHz 6.895 – 7.115 GHz
	Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum 1024-QAM, 16-QAM, 256-QAM, 64-QAM, BPSK, CCK, OFDM, QPSK
	Security	802.1x authentication AES-CCMP: 128 bit in hardware IEEE 802.11i IEEE and WiFi certified 64 / 128 bit WEP encryption for a/b/g mode only WAPI



Network Architecture Models	WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power	802.11b : +17dBm minimum 802.11g : +16dBm minimum 802.11a : +17dBm minimum 802.11n HT20(2.4GHz) : +14dBm minimum 802.11n HT40(2.4GHz) : +13dBm minimum 802.11n HT20(5GHz) : +14dBm minimum 802.11n HT40(5GHz) : +13dBm minimum 802.11ac VHT80(5GHz) : +10dBm minimum 802.11ac VHT160(5GHz) : +10dBm minimum 802.11ax HE40(2.4GHz) : +12dBm minimum 802.11ax HE80(5GHz) : +10dBm minimum 802.11ax HE160(5GHz) : +10dBm minimum
Power Consumption	Transmit mode : 2.0 W Receive mode : 1.6 W Idle mode (PSP) : 180 mW (WLAN Associated) Idle mode: 50 mW (WLAN unassociated) Connected Standby/Modern Standby : 10 mW Radio disabled : 8 mW
Power Management	ACPI and PCI Express® compliant power management 802.11 compliant power saving mode
Receiver Sensitivity ²¹	802.11b, 1Mbps : -93.5dBm maximum 802.11b, 11Mbps : -84dBm maximum 802.11a/g, 6Mbps : -86dBm maximum 802.11a/g, 54Mbps : -72dBm maximum 802.11n, MCS07 : -67dBm maximum 802.11n, MCS15 : -64dBm maximum 802.11ac, MCS0(VHT80) : -84dBm maximum 802.11ac, MCS9(VHT80) : -59dBm maximum 802.11ac, MCS9(VHT160) : -58.5dBm maximum 802.11ax, MCS11(HE40) : -57dBm maximum 802.11ax, MCS11(HE80) : -54dBm maximum 802.11ax, MCS11(HE160) : -53.5dBm maximum
Antenna Type	High efficiency antenna with spatial diversity Two embedded tri-band 2.4/5/6 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications



Form Factor	PCI Express® M.2 MiniCard
Dimensions	2.30 x 22.00 x 30.00 mm (0.09 x 0.87 x 1.18 inch)
Weight	Type 2230: 2.8 g(0.099 oz)
Operating Voltage	3.3 v +/- 9 %
Bluetooth® Specification	Integrated Bluetooth® specifications 4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4 Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps Bluetooth® Low Energy : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 9.5 dBm for BR and EDR.
Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth® Software	Microsoft Windows Bluetooth® Software
Supported Link Topology	
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Certifications	FCC (47 CFR) Part 15C/E, Section 15.247, 15.249, 15.407 ETSI 300 328, ETSI 301 893, ETSI 303 687
Bluetooth® Profiles Supported	Advanced Audio Distribution Profile (A2DP) Basic Imaging Profile (BIP) Bluetooth® 4.1 -ESR 5/6/7 Compliance Bluetooth® 4.2 ESR08 Compliance Bluetooth® 5.2 Bluetooth® 5.3 Channel Selection Algo Compliance to the latest Errata Sectipn 12.3 of Bluetooth® 5.3 specification Encryption key size control enhancements ESR 9/10 Compliance FAX Profile (FAX) Hands Free Profile (HFP) Headset Profile (HSP)



		<ul style="list-style-type: none"> Host to Controller Encryption Key Control Enhancements LE 2Mbps LE Advertisement Extensions LE Data Packet Length Extension LE Dual Mode LE L2CAP Connection Oriented Channels LE Link Layer LE Link Layer Ping LE Long Range LE Low Duty Cycle Directed Advertising LE Privacy 1.2 –Extended Scanner Filter Policies LE Privacy 1.2 –Link Layer Privacy LE Secure Connection- Basic/Full Limited High Duty Cycle Non-Connectable Advertising Periodic Advertisement interval Train Nudging & Interlaced Scan Windows Bluetooth® profiles support
<p>Intel® BE200 Wi-Fi 7 Bluetooth® 5.4 non-vPro WW WLAN ²²</p>	<p>Wireless LAN Standards</p>	<ul style="list-style-type: none"> IEEE 802.11a IEEE 802.11ac IEEE 802.11ax IEEE 802.11b IEEE 802.11be IEEE 802.11d IEEE 802.11e IEEE 802.11g IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11n IEEE 802.11r IEEE 802.11v
	<p>Interoperability Frequency Band</p>	<ul style="list-style-type: none"> Wi-Fi certified 802.11b/g/n/ax/be 2.402 – 2.482 GHz 802.11a/n/ac/ax/be 4.9 – 4.95 GHz (Japan) 5.15 – 5.25 GHz 5.25 – 5.35 GHz 5.47 – 5.725 GHz 5.825 – 5.850 GHz



	5.955 – 6.415 GHz
	6.435 – 6.515 GHz
	6.535 – 6.875 GHz
	6.895 – 7.115 GHz
Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11ac : MCS0 ~ MCS9, (20MHz, 40MHz, 80MHz, 160MHz) 802.11ax : MCS0 ~ MCS11, (20MHz, 40MHz, 80MHz, 160MHz) 802.11b: 1, 2, 5.5, 11 Mbps 802.11be : MCS0~13, (20MHz, 40MHz, ,80MHz, 160MHz, 320MHz) 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, 40MHz)
Modulation	Direct Sequence Spread Spectrum 1024-QAM, 16-QAM, 256-QAM, 4096-QAM, 64-QAM, BPSK, CCK, OFDM, QPSK
Security	802.1x authentication AES-CCMP: 128 bit in hardware IEEE 802.11i IEEE and WiFi certified 64 / 128 bit WEP encryption for a/b/g mode only WAPI WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power	802.11b, 1Mbps : +17dBm minimum 802.11g, 6Mbps : +16dBm minimum 802.11a, 6Mbps : +17dBm minimum 802.11n, MCS7(HT20) : +14dBm minimum 802.11n, MCS7(HT40) : +13.5dBm minimum 802.11ac MCS9(VHT20) : 13.5dBm minimum 802.11ac MCS9(VHT40) : +13.5dBm minimum 802.11ac MCS9(VHT80) : +12.5dBm minimum 802.11ac MCS9(VHT160) : +10.5dBm minimum 802.11ax MCS11(HE20)(6GHz) : +11.5dBm minimum 802.11ax MCS11(HE40)(6GHz) : +7.5dBm minimum 802.11ax MCS11(HE80)(6GHz) : +7.5dBm minimum 802.11ax MCS11(HE160)(6GHz) : +7.5dBm minimum 802.11be MCS13(EHT20)(6GHz) : 11.5dBm 802.11be MCS13(EHT40)(6GHz) : 7.5dBm 802.11be MCS13(EHT80)(6GHz) : 7.5dBm



Power Consumption	<p>802.11be MCS13(EHT160)(6GHz) : 6.5dBm 802.11be MCS13(EHT320)(6GHz) : 4.5dBm Transmit mode : 3.4 W Receive mode : 1.8 W Idle mode (PSP) : 180 mW (WLAN Associated) Idle mode: 50 mW (WLAN unassociated) Connected Standby/Modern Standby : 10 mW Radio disabled : 8 mW</p>
Power Management	ACPI and PCI Express® compliant power management
Receiver Sensitivity ²¹	<p>802.11 compliant power saving mode 802.11b, 1Mbps : -93.5dBm maximum 802.11b, 11Mbps : -85dBm maximum 802.11a/g, 6Mbps : -90.5dBm maximum 802.11a/g, 54Mbps : -72.5dBm maximum 802.11n, MCS0(HT20) : -90dBm maximum 802.11n, MCS7(HT20) : -71.5dBm maximum 802.11n, MCS0(HT40) : -88.5dBm maximum 802.11n, MCS7(HT40) : -68.5dBm maximum 802.11ac, MCS9(VHT20) : -88.5dBm maximum 802.11ac, MCS9(VHT40) : -65.5dBm maximum 802.11ac, MCS9(VHT80) : -60.5dBm maximum 802.11ac, MCS9(VHT160) : -58.5dBm maximum 802.11ax, MCS11(HE20)(6GHz) : -59.5dBm maximum 802.11ax, MCS11(HE40)(6GHz) : -56.5dBm maximum 802.11ax, MCS11(HE80)(6GHz) : -53.5dBm maximum 802.11ax, MCS11(HE160)(6GHz) : -51.5dBm maximum 802.11be, MCS13(EHT20)(6GHz) : -55.5dBm maximum 802.11be, MCS13(EHT40)(6GHz) : -53.5dBm maximum 802.11be, MCS13(EHT80)(6GHz) : -51.5dBm maximum 802.11be, MCS13(EHT160)(6GHz) : -48.5dBm maximum 802.11be, MCS13(EHT320)(6GHz) : -45.5dBm maximum</p>
Antenna Type	<p>High efficiency antenna with spatial diversity Two embedded tri-band 2.4/5/6 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications</p>
Form Factor	PCI Express® M.2 MiniCard
Dimensions	30.00 x 22.00 x 2.30 mm (1.18 x 0.87 x 0.09 inch)
Weight	Type 2230: 3.1 g(0.109 oz)
Operating Voltage	3.3 v +/- 5 %
Bluetooth® Specification	Integrated Bluetooth® specifications
Frequency Band	4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4 Compliant 2042 to 2480 MHz



Number of Available Channels	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps Bluetooth® Low Energy : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class I Bluetooth device with a maximum transmit power of +15.5 dBm for BR and +13dBm for EDR.
Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth® Software Supported Link Topology	Microsoft Windows Bluetooth® Software
Power Management Certifications	Microsoft Windows ACPI, and USB Bus Support FCC (47 CFR) Part 15C/E, Section 15.247, 15.249, 15.407 ETSI 300 328, ETSI 301 893, ETSI 303 687
Bluetooth® Profiles Supported	LE 2Mbps Advanced Audio Distribution Profile (A2DP) Basic Imaging Profile (BIP) Bluetooth® 4.1 -ESR 5/6/7 Compliance Bluetooth® 4.2 ESR08 Compliance Bluetooth® 5.2 Channel Selection Algo Encryption key size control enhancements FAX Profile (FAX) Hands Free Profile (HFP) Headset Profile (HSP) LE Advertisement Extensions LE Data Packet Length Extension LE Dual Mode LE L2CAP Connection Oriented Channels LE Link Layer LE Link Layer Ping LE Long Range LE Low Duty Cycle Directed Advertising LE Privacy 1.2 –Extended Scanner Filter Policies LE Privacy 1.2 –Link Layer Privacy



HP R15 5G Solution ²³

Technology Operating Bands

LE Secure Connection- Basic/Full
Limited High Duty Cycle Non-Connectable Advertising
Train Nudging & Interlaced Scan
Windows Bluetooth® profiles support

WCDMA/HSPA+ operating bands:

Band 01: 1920 to 1980 MHz (UL), 2110 to 2170 MHz (DL)
Band 02: 1850 to 1910 MHz (UL), 1930 to 1990 MHz (DL)
Band 04: 1710 to 1755 MHz (UL), 2110 to 2155 MHz (DL)
Band 05: 824 to 849 MHz (UL), 869 to 894 MHz (DL)
Band 08: 880 to 915 MHz (UL), 925 to 960 MHz (DL)

LTE FDD/TDD operating bands:

Band 01: 1920 to 1980 MHz (UL), 2110 to 2170 MHz (DL)
Band 02: 1850 to 1910 MHz (UL), 1930 to 1990 MHz (DL)
Band 03: 1710 to 1785 MHz (UL), 1805 to 1880 MHz (DL)
Band 04: 1710 to 1755 MHz (UL), 2110 to 2155 MHz (DL)
Band 05: 824 to 849 MHz (UL), 869 to 894 MHz (DL)
Band 07: 2500 to 2570 MHz (UL), 2620 to 2690 MHz (DL)
Band 08: 880 to 915 MHz (UL), 925 to 960 MHz (DL)
Band 12: 699 to 716 MHz (UL), 729 to 746 MHz (DL)
Band 13: 777 to 787 MHz (UL), 746 to 756 MHz (DL)
Band 14: 788 to 798 MHz (UL), 758 to 768 MHz (DL)
Band 17: 704 to 716 MHz (UL), 734 to 746 MHz (DL)
Band 18: 815 to 830 MHz (UL), 860 to 875 MHz (DL)
Band 19: 830 to 845 MHz (UL), 875 to 890 MHz (DL)
Band 20: 832 to 862 MHz (UL), 791 to 821 MHz (DL)
Band 25: 1850 to 1915 MHz (UL), 1930 to 1995 MHz (DL)
Band 26: 814 to 849 MHz (UL), 859 to 894 MHz (DL)
Band 28: 703 to 748 MHz (UL), 758 to 803 MHz (DL)
Band 29: 717 to 728 MHz (DL)
Band 30: 2305 to 2315 MHz (UL) 2350 to 2360 MHz (DL)
Band 34: 2010 to 2025 MHz (UL/DL)
Band 38: 2570 to 2620 MHz (UL/DL)
Band 39: 1880 to 1920 MHz (UL/DL)
Band 40: 2300 to 2400 MHz (UL/DL)
Band 41: 2496 to 2690 MHz (UL/DL)
Band 42: 3400 to 3600 MHz (UL/DL)
Band 43: 3400 to 3800 MHz (UL/DL)
Band 48: 3550 to 3700 MHz (UL/DL)
Band 66: 1710 to 1800 MHz (UL), 2110 to 2200 MHz (DL)
Band 71: 663 to 698 MHz (UL), 617 to 652 MHz (DL)



	5G NR Sub 6GHz: n1: 1920 to 1980 MHz (UL), 2110 to 2170 MHz (DL) n2: 1850 to 1910 MHz (UL), 1930 to 1990 MHz (DL) n20: 832 to 862 MHz (UL), 791 to 821 MHz (DL) n25: 1850 to 1915 MHz (UL), 1930 to 1995 MHz (DL) n28: 703 to 748 MHz (UL), 758 to 803 MHz (DL) n3: 1710 to 1785 MHz (UL), 1805 to 1880 MHz (DL) n30: 2305 to 2315 MHz (UL) 2350 to 2360 MHz (DL) n38: 2570 to 2620 MHz (UL/DL) n40: 2300 to 2400 MHz (UL/DL) n41: 2496 to 2690 MHz (UL/DL) n48: 3550 to 3700 MHz (UL/DL) n5: 824 to 849 MHz (UL), 869 to 894 MHz (DL) n66: 1710 to 1800 MHz (UL), 2110 to 2200 MHz (DL) n7: 2500 to 2570 MHz (UL), 2620 to 2690 MHz (DL) n71: 663 to 698 MHz (UL), 617 to 652 MHz (DL) n77: 3300 to 4200 MHz (UL/DL) n78: 3300 to 3800 MHz (UL/DL) n79: 4400 to 5000 MHz (UL/DL) n8: 880 to 915 MHz (UL), 925 to 960 MHz (DL)
Wireless Protocol Standards	NR Sub6G rel15 200MHz 2 DLCA, 256 QAM 200MHz 2 ULCA, 256 QAM 15KHz/30KHz SCS for FDD/TDD LTE Rel15 100MHz 5 DLCA, 256 QAM 40MHz 2 ULCA, 256 QAM UMTS Rel8
GPS	Standalone A-GPS (MS-A, MS-B)
GPS Bands	GPS L1 (1575.42MHz) GLONASS L1 (1602MHz) Beidou B1 (1561.098MHz) Galileo E1 (1575.42MHz) QZSS (1575.42MHz)
Maximum Data Rates	5G/NR SA sub-6 Peak: 4.67 Gbps(Download), 1.25 Gbps (Upload) 5G NSA sub-6 Peak: 3.74 Gbps(Download), 835.00 Mbps (Upload)
Maximum Output Power	HSPA+: 23.5 dBm Not support HPUE LTE all band (except B30= 22dBm & B48= 21dBm): 23.0 dBm Not support HPUE NR (all band except n41, n77, n78, n79): 23.0 dBm Not support



		HPUE NR n41, n77, n78, n79 HPUE: 26.0 dBm Support HPUE 5G Sub 6: 3,500 mA; 1,300 mA (average) LTE: 2,500 mA (peak); 1,000 mA (average)
	Maximum Power Consumption	
	Form Factor	M.2 3052-S3 Key B
	Weight	8.6 g (0.303 oz)
	Dimensions (Length x Width x Thickness)	30.00 x 52.00 x 2.30 mm (1.18 x 2.05 x 0.09 inch)
	Embedded eSIM	Yes
RTK GBE Ethernet Controller ²⁴	Connector	RJ-45
	System Interface	PCI™ (Intel proprietary) + SMBus
	Data Rates Supported	1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) Full Duplex Operation at all Speeds Auto-Negotiation (Automatic Speed Selection) Half Duplex operation at 10 & 100 Mbit/s
	IEEE Compliance	IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3az EEE (Energy Efficient Ethernet) IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	Performance	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling Jumbo Frame 9K
	Power Consumption	Cable Disconnection: 25 mW 100Mbps Full Run: 450 mW 1000Mbps Full Run: 1000 mW WoL Enable(S3/S4/S5): 50 mW WoL Disable(S3/S4/S5): 25 mW
	Power Management	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
	Management Interface	Auto MDI/MDIX Crossover cable detection



IT Manageability

Wake-on-LAN from modern standby or sleep state (Magic Packet and Microsoft Wake-Up Frame)

Wake-on-LAN from off (Magic Packet only)

PXE 2.1 Remote Boot

Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))

Comprehensive diagnostic and configuration software suite

Virtual Cable Doctor for Ethernet cable status

Security & Manageability

Non-support DASH feature

21. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

22. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 7 (802.11BE) functionality requires compatible Windows OS, select Intel® processor, and a Wi-Fi 7 router, sold separately. Wi-Fi 7 is backwards compatible with prior 802.11 specs. Available in countries where Wi-Fi 7 is supported. The specification for 802.11BE is a draft specification and is not final. If the final specification differs from the draft specification, it may affect the ability of the device to communicate with other 802.11BE devices.

23. 5G module is optional and must be configured at the factory. Module designed for 5G NR NSA (non-standalone) networks as carriers deploy Evolved-Universal Terrestrial Radio Access New Radio Dual Connectivity (ENDC) with both 100Mhz of 5G NR and LTE channel bandwidth, using 256QAM 4x4 as defined by 3GPP. Module requires activation and separately purchased service contract. Check with service provider for coverage and availability in your area. Data connection, upload and download speeds will vary due to network, location, environment, network conditions, and other factors. Backwards compatible to 4G LTE and 3G HSPA technologies. 5G module planned to be available in select platforms and select countries, where carrier supported.

24. The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.



POWER

Power supply availability may vary by country.

65W Wall Mount USB Type-C® GaN Halogen Free AC power adapter	Weight (DC Cable Included)	185 g ± 10 g
	Input	100 Vac ~ 240 Vac
	Input Efficiency	USB-C 89.00 % min at 115 Vac/ 230 Vac @ 20.00 V/ 3.25 A
	Input frequency range	47 Hz ~ 63 Hz
	Input AC current	Max 1.60 A at 90 Vac input
	Output	
	Output power	20.00 V / 65.00 W
	DC output	+ 20.00 V
	Hold - up time	5 ms at 115 Vac input
	Output Over Current Protection	5.40 A (max)
	AC Inlet Type	Foldable for 2 prong
	DC Cable Connector	USB Type-C
	DC Cable Material	Halogen Free
	Connector	
	Connector	Foldable for 2 prong
	Environmental Design	
	Operating temperature	0°C to 35°C (32°F to 95°F)
Non - operating(storage) temperature	-20°C to 85°C (-4°F to 185°F)	
Altitude	0 m to 5000 m (0 ft to 16404.2 ft)	
Humidity	20 % to 95 %	
Storage Humidity	10 % to 95 %	
EMI and Safety Certifications	Worldwide safety standards - IEC60950-1 and IEC62368-1: 2018, EN62368-1:2014+A11, UL62368-1 Agency approvals - C-UL-US, TUV/GS, TUV/PSE, EN55032 Class B, FCC Class B, CISPR32 Class B, CCC and CECP, CU(EAC), EAEU, KCC(Safety+EMC) and K-MEPS, NOM-001 and 029 NYCE, NRcan, NRCS, ISC, SEC, PSB, Argentina S-mark, Australia GEMS and RCM, BIS, BSMI, UAE, UKCA DoC	
65W Wall Mount USB Type-C® GaN Halogen Free AC power adapter	Weight (DC Cable Included)	185 g ± 10 g
	Input	100 Vac ~ 240 Vac
	Input Efficiency	USB-C 89.00 % min at 115 Vac/ 230 Vac @ 20.00 V/ 3.25 A
	Input frequency range	47 Hz ~ 63 Hz
	Input AC current	Max 1.60 A at 90 Vac input
	Output	
	Output power	20.00 V / 65.00 W
	DC output	+ 20.00 V



Hold - up time	5 ms at 115 Vac input
Output Over Current Protection	5.50 A (max)
AC Inlet Type	Fixed 2 Prong
DC Cable Connector	USB Type-C
DC Cable Material	Halogen Free
Connector	
Connector	Fixed 2 Prong
Environmental Design	
Operating temperature	0°C to 35°C (32°F to 95°F)
Non - operating(storage) temperature	-20°C to 85°C (-4°F to 185°F)
Altitude	0 m to 5000 m (0 ft to 16404.2 ft)
Humidity	20 % to 95 %
Storage Humidity	10 % to 95 %
EMI and Safety Certifications	Worldwide safety standards - IEC60950-1 and IEC62368-1: 2018, EN62368-1:2014+A11, UL62368-1 Agency approvals - C-UL-US, TUV/GS, TUV/PSE, EN55032 Class B, FCC Class B, CISPR32 Class B, CCC and CECP, CU(EAC), EAEU, KCC(Safety+EMC) and K-MEPS, NOM-001 and 029 NYCE, NRcan, NRCS, ISC, SEC, PSB, Argentina S-mark, Australia GEMS and RCM, BIS, BSMI, UAE, UKCA DoC
65W Standard USB Type-C® GaN AC power adapter	
Weight (DC Cable Included)	185 g ± 10 g
Input	100 Vac ~ 240 Vac
Input Efficiency	USB-C 89.00 % min at 115 Vac/ 230 Vac @ 20.00 V/ 3.25 A
Input frequency range	47 Hz ~ 63 Hz
Input AC current	Max 1.60 A at 90 Vac input
Output	
Output power	20.00 V / 65.00 W
DC output	+ 20.00 V
Hold - up time	5 ms at 115 Vac input
Output Over Current Protection	5.40 A (max)
AC Inlet Type	C6
DC Cable Connector	USB Type-C
DC Cable Material	Low Halogen
Connector	
Connector	C6
Environmental Design	
Operating temperature	0°C to 35°C (32°F to 95°F)
Non - operating(storage) temperature	-20°C to 85°C (-4°F to 185°F)



Altitude	0 m to 5000 m (0 ft to 16404.2 ft)
Humidity	20 % to 95 %
Storage Humidity	10 % to 95 %
EMI and Safety Certifications	Worldwide safety standards - IEC60950-1 and IEC62368-1: 2018, EN62368-1:2014+A11, UL62368-1 Agency approvals - C-UL-US, TUV/GS, TUV/PSE, EN55032 Class B, FCC Class B, CISPR32 Class B, CCC and CECP, CU(EAC), EAEU, KCC(Safety+EMC) and K-MEPS, NOM-001 and 029 NYCE, NRcan, NRCS, ISC, SEC, PSB, Argentina S-mark, Australia GEMS and RCM, BIS, BSMI, UAE, UKCA DoC

45W Standard USB Type-C® GaN AC power adapter

Weight (DC Cable Included)	185 g ± 10 g
Input	100 Vac ~ 240 Vac
Input Efficiency	USB-C 90.00 % min at 115 Vac/ 230 Vac @ 28.00 V/ 5.00 A
Input frequency range	47 Hz ~ 63 Hz
Input AC current	Max 1.60 A at 90 Vac input
Output	
Output power	28.00 V / 140.00 W
DC output	+ 28.00 V
Hold - up time	5 ms at 115 Vac input
Output Over Current Protection	5.00 A (max)
AC Inlet Type	C6
DC Cable Connector	USB Type-C
DC Cable Material	PVC
Connector	
Connector	C6
Environmental Design	
Operating temperature	0°C to 35°C (32°F to 95°F)
Non - operating(storage) temperature	-20°C to 85°C (-4°F to 185°F)
Altitude	0 m to 5000 m (0 ft to 16404.2 ft)
Humidity	20 % to 95 %
Storage Humidity	10 % to 95 %
EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950-1 and IEC62368-1 : 2018, EN62368-1:2014+A11, UL62368-1 Agency approvals - C-UL-US, TUV/GS, TUV/PSE, EN55032 Class B, FCC Class B, CISPR32 Class B, CCC and CECP, CU(EAC), EAEU, KCC(Safety+EMC) and K-MEPS, NOM-001 and 029 NYCE, NRcan,



NRCS, ISC, SEC, PSB, Argentina S-mark, Australia RCM, BIS, BSMI, UAE, UKCA DoC, USB-IF, Ukraine(CoC+DoC+RoHS+ECO)

Battery

Battery is internal and replaceable by customer. Serviceable by warranty.

PM 68Whr Long Life Polymer Fast charge 3 cell Battery	Weight	236 g ± 10 g (0.52lb)
	Cells / Type	3 cell Lithium-Ion Polymer / 636076
	Energy	
	Voltage	11.67 V
	Amp - hour capacity	5.830 Ah
	Watt - hour capacity	68Wh
	Temperature	
	Operating (Charging)	0°C to 45°C (32°F to 113°F)
	Operating (Discharging)	-10°C to 65°C (14°F to 149°F)
	Optional Travel Battery Available	No
RX 56Whr Long Life Polymer Fast Charge 3 cell Battery	Weight	0.208kg +/- 10g (0.459 lb)
	Cells / Type	3 cell Lithium-Ion Polymer / 586075
	Energy	
	Voltage	11.58V
	Amp - hour capacity	4.840Ah
	Watt - hour capacity	56.04Wh
	Temperature	
	Operating (Charging)	0°C to 45°C (32°F to 113°F)
	Operating (Discharging)	-10°C to 60°C (14°F to 140°F)
	Optional Travel Battery Available	No



AUDIO

Codec	Realtek ALC3247
Audio I/O Ports	3.5mm Headset: CTIA only
Internal Speaker Amplifier	Codec Integrated (Realtek ALC3247)
Sampling	DAC: Supports resolutions from 16-bit to 24-bit; 44.1 kHz to 48.0 kHz ADC: Supports resolutions from 16-bit to 24-bit; 44.1 kHz to 48.0 kHz
Wavetable Syntheses	Yes - Uses OS soft wavetable
Internal Speaker	Yes



FINGERPRINT READER

Sensor vendor	CAREWE
Sensor type	Capacitive
DPI resolution	508 DPI
Scan area	160 x 160 pixels
False Rejection Rate	≤ 1%
False Acceptance Rate	≤ 0.001%
Mobile Voltage Operation	3.0 V ~ 3.6 V
Operating Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Current Consumption Image	6 mA max
Low Latency Wait For Finger	2 uA
Capture Rate	60 frames/sec
ESD Resistance	IEC 61000-4-2 4B (+15KV)
Detection Matrix	508 dpi / 8.0 x 8.0 mm sensor area



OPTIONS

Container Name	Description	Part Number
	HP HDMI to VGA Adapter	H4F02AA
	HP USB 3.0 to Gigabit RJ45 Adapter G2	4Z7Z7AA
	HP USB-C to DisplayPort Adapter G2	8Y8Y1AA
	HP USB-C to HDMI 2.0 Adapter	1WC36AA
	HP USB-C to RJ45 Adapter G2	4Z527AA
	HP USB-C to USB 3.0 Adapter	N2Z63AA
	HP USB-C to VGA Adapter	N9K76AA
Audio - Earbuds	Poly Voyager Free 60+ Carbon Black Earbuds	7Y8G4AA
	Poly Voyager Free 60+ Carbon Black Earbuds	7Y8H0AA
Audio - Headset	HP USB G2 Stereo Headset	428K6AA
	Poly Blackwire 3210 Monaural USB-C Headset	8X214AA
	Poly Blackwire 3215 Monaural USB-C Headset	8X227AA
	Poly Blackwire 3220 Stereo USB-C Headset	8X228AA
	Poly Blackwire 3225 Stereo USB-C Headset	8X229AA
	Poly Blackwire 3310 Monaural USB-C Headset	8X215AA
	Poly Blackwire 3310 Monaural USB-C Headset	8X216AA
	Poly Blackwire 3315 Monaural USB-C Headset	8X217AA
	Poly Blackwire 3315 Monaural USB-C Headset	8X218AA
	Poly Blackwire 3320 Stereo USB-C Headset	8X219AA
	Poly Blackwire 3320 Stereo USB-C Headset	8X220AA
	Poly Blackwire 3325 Stereo USB-C Headset	8X221AA
	Poly Blackwire 3325 Stereo USB-C Headset	8X222AA
	Poly Blackwire 5210 Monaural USB-C Headset	8X230AA
	Poly Blackwire 5220 Stereo USB-C Headset	8X231AA
	Poly Blackwire 8225 Stereo USB-C Headset	8X223AA
	Poly Blackwire 8225 Stereo USB-C Headset	8X225AA
	Poly EncorePro 320 Binaural Headset	77T26AA
	Poly EncorePro 510 Monaural Headset	783Q2AA
	Poly EncorePro 510 Monoaural Headset	783Q1AA
	Poly EncorePro 520 Binaural Headset	783P6AA
	Poly EncorePro 520 Binaural Headset	783P7AA
	Poly EncorePro 530 Discreet Headset	783P2AA
	Poly EncorePro 530 Headset	783P3AA
	Poly EncorePro 540 Convertible Headset	783P0AA
	Poly EncorePro 540 Convertible Headset	783P1AA
	Poly EncorePro 720 Binaural Headset	8R707AA
	Poly EncorePro HW710 Single Ear Headset	8R708AA
	Poly EncorePro Monoaural 310 Headset	77T43AA
	Poly EncorePro Monoaural 515 with USB-A Headset	783R0AA



Poly EncorePro Monoaural 515 with USB-A Headset	783R1AA
Poly EncorePro Stereo 525 with USB-A Headset	783R2AA
Poly EncorePro USB-A Convertible 545 Headset	783R4AA
Poly EncorePro USB-A Monoaural 715 Headset	783N5AA
Poly EncorePro USB-A Stereo 525 Headset	783R3AA
Poly EncorePro USB-A Stereo 725 Headset	783M6AA
Poly EncorePro USB-C Monoaural 310 Headset	760Q8AA
Poly Savi 7310 DECT 1880-1900 MHz Single Ear Headset	8D3G3AA
Poly Savi 7310 Monoaural DECT 1880-1900 MHz Headset	8L561AA
Poly Savi 7310 Monoaural DECT 1880-1900 MHz Headset	8L575AA
Poly Savi 7310 Monoaural DECT 1920-1930 MHz Headset	7S430AA
Poly Savi 7310 Monoaural DECT 1920-1930 MHz Headset	8L570AA
Poly Savi 7310 Monoaural DECT 1920-1930 MHz Headset	8L585AA
Poly Savi 7310-M DECT 1880-1900 MHz Single Ear Headset	8D3K7AA
Poly Savi 7310-M DECT 1920-1930 MHz Single Ear Headset	7S439AA
Poly Savi 7320 Stereo DECT 1880-1900 MHz Headset	8D3F7AA
Poly Savi 7320 Stereo DECT 1880-1900 MHz Headset	8L545AA
Poly Savi 7320 Stereo DECT 1880-1900 MHz Headset	8L553AA
Poly Savi 7320 Stereo DECT 1893-1906 MHz Headset	8D3F8AA
Poly Savi 7320 Stereo DECT 1893-1906 MHz Headset	8L546AA
Poly Savi 7320 Stereo DECT 1893-1906 MHz Headset	8L555AA
Poly Savi 7320 Stereo DECT 1910-1920 MHz Headset	8D3G0AA
Poly Savi 7320 Stereo DECT 1920-1930 MHz Headset	7S429AA
Poly Savi 7320 Stereo DECT 1920-1930 MHz Headset	8L549AA
Poly Savi 7320 Stereo DECT 1920-1930 MHz Headset	8L559AA
Poly Savi 7320-M Stereo DECT 1880-1900 MHz Headset	8D3J6AA
Poly Savi 7320-M Stereo DECT 1893-1906 MHz Headset	8D3K2AA
Poly Savi 7320-M Stereo DECT 1910-1920 MHz Headset	8D3K0AA
Poly Savi 7320-M Stereo DECT 1920-1930 MHz Headset	7S435AA
Poly Savi 8210 DECT 1880-1900 MHz USB-A Headset	8D3E9AA
Poly Savi 8210 DECT 1880-1900 MHz USB-A Headset	8D3F1AA
Poly Savi 8210 DECT 1920-1930 MHz USB-A Headset	77T29AA
Poly Savi 8210 DECT 1920-1930 MHz USB-A Headset	77T31AA
Poly Savi 8220 DECT 1880-1900 MHz USB-A Headset	8D3F2AA
Poly Savi 8220 DECT 1880-1900 MHz USB-A Headset	8D3F5AA
Poly Savi 8220 DECT 1920-1930 MHz USB-A Headset	77T33AA
Poly Savi 8220 DECT 1920-1930 MHz USB-A Headset	77Y82AA
Poly Savi 8220 Stereo DECT 1880-1900 MHz Top	8Y9C4AA
Poly Savi 8245 DECT 1880-1900 MHz Headset	8D3H2AA
Poly Savi 8245 DECT 1880-1900 MHz USB-A Headset	8D3F4AA
Poly Savi 8410 Monoaural DECT 1880-1900 MHz Headset	8L5A7AA
Poly Savi 8410 Monoaural DECT 1880-1900 MHz Headset	8L5A9AA



Poly Savi 8410 Monaural DECT 1920-1930 MHz Headset	8L7E6AA
Poly Savi 8410 Monaural DECT 1920-1930 MHz Headset	8L7E9AA
Poly Savi 8420 Stereo DECT 1880-1900 MHz Headset	8L5B2AA
Poly Savi 8420 Stereo DECT 1880-1900 MHz Headset	8L5B3AA
Poly Savi 8420 Stereo DECT 1920-1930 MHz Headset	8L7F2AA
Poly Savi 8420 Stereo DECT 1920-1930 MHz Headset	8L7F5AA
Poly Savi 8445 DECT 1880-1900 MHz Convertible Headset	8L5B4AA
Poly Savi 8445 DECT 1880-1900 MHz Convertible Headset	8L5B6AA
Poly Savi 8445 DECT 1920-1930 MHz Convertible Headset	8L7F1AA
Poly Savi 8445 DECT 1920-1930 MHz Convertible Headset	8L7F8AA
Poly Voyager 4310 Headset	77Y93AA
Poly Voyager 4310 Monaural Headset	77Y92AA
Poly Voyager 4310 USB-A Headset	76U48AA
Poly Voyager 4310 USB-A Headset	77Y91AA
Poly Voyager 4310 USB-C Headset	77Y94AA
Poly Voyager 4310 USB-C Headset	77Y95AA
Poly Voyager 4310 USB-C Headset	77Y96AA
Poly Voyager 4310-M USB-C Headset	77Y97AA
Poly Voyager 4320 Headset	77Z00AA
Poly Voyager 4320 Stereo USB-A Headset	77Y99AA
Poly Voyager 4320 USB-A Headset	76U49AA
Poly Voyager 4320 USB-A Headset	77Y98AA
Poly Voyager 4320 USB-C Headset	76U50AA
Poly Voyager 4320 USB-C Headset	77Z30AA
Poly Voyager 4320 USB-C Headset	77Z31AA
Poly Voyager 4320-M Headset	77Z32AA
Poly Voyager Focus 2 USB-C-C Headset	9T9J3AA
Poly Voyager Focus 2 USB-C-C Headset	9T9J5AA
Poly Voyager Focus 2 USB-C-C Headset	9T9J6AA
Poly Voyager Legend 50 Headset UC	AT9M9AA,AT9M9UT
Poly Voyager Legend 50-M Headset UC	AJ8V4AA,AJ8V4UT
Poly Voyager Surround 80 USB-C Headset	8G7T9AA
Poly Voyager Surround 80 USB-C Headset	8G7U0AA
Poly Voyager Surround 85 USB-C Headset	8G7T7AA
Poly Voyager Surround 85 USB-C Headset	8G7T8AA
Poly Sync 10 Speakerphone	77P34AA
Poly Sync 20 Speakerphone USB-C/A Adapter	B95VJUT
Poly Sync 20+ Speakerphone	B95VKAA
Poly Sync 20+M Speakerphone USB-C/A Adapter	B95VLAA
Poly Sync 20-M Speakerphone USB-C/A Adapter	B95VMUT
Poly Sync 40 Speakerphone	77P35AA
Poly Sync 40+ USB-A USB-C Speakerphone	77P36AA

Audio - Speaker phone



Cases

Poly Sync 40+ USB-A USB-C Speakerphone	772C5AA
Poly Sync 60 Speakerphone	772C2AA
Poly Sync 60 Speakerphone	77P41AA
Poly Sync USB-A USB-C 10 Speakerphone	772C3AA
Poly Sync USB-A USB-C 40 Speakerphone	772C4AA
HP 115 15.6 Laptop Backpack	8DV45AA
HP 14 Convertible Laptop Backpack Tote	9C2H1AA
HP 14 Modular Laptop Sleeve	9J499AA
HP 15.6 Modular Laptop Backpack	9J496AA
HP 15.6 Modular Laptop Bag	9J497AA
HP 15.6 Modular Laptop Sleeve	9J498AA
HP 215 15.6 Laptop Backpack	35L98AA,35L98UT
HP 225 15.6 Laptop Backpack	2P7U6AA,2P7U6UT
HP 235 15.6 Laptop Backpack	35M00AA
HP 315 15.6 Laptop Backpack	35L97AA
HP Campus blue Backpack	7K0E5AA
HP Campus Core 16 blue Laptop Backpack	B9RB4AA
HP Campus Core 16 green Laptop Backpack	B9RB5AA
HP Campus green Backpack	7K0E4AA
HP Campus XL Marble Stone Backpack	7K0E2AA
HP Campus XL Tie Dye Backpack	7K0E3AA
HP Convertible Laptop Stand	9C2H2AA
HP Everyday 14 odyssey gray Laptop Bag	A08KJAA
HP Everyday 14 odyssey gray Laptop Briefcase	A08KGAA
HP Everyday 16 odyssey gray Laptop Backpack	A08KLUT
HP Everyday 16 odyssey gray Laptop Bag	A08KKAA
HP Everyday 16 odyssey gray Laptop Briefcase	A08KHUT
HP Prelude 15.6 Backpack	1E7D6AA,1E7D6UT,50P32AA
HP Prelude 15.6 Top Load	1E7D7AA,50P31AA
HP Prelude Pro Recycled 15.6 Backpack	1X644AA
HP Prelude Pro Recycled 15.6 Top Load	1X645AA
HP Renew Business 14.1 Laptop Bag	3E5F9AA
HP Renew Business 14.1 Laptop Sleeve	3E2U7AA
HP Renew Business 15.6 Laptop Bag	3E5F8AA
HP Renew Business 17.3 Laptop Backpack	3E2U5UT
HP Renew Business 17.3 Laptop Bag	3E2U6AA
HP Renew Executive 14.1 Laptop Sleeve	6B8Y3AA
HP Renew Executive 16 Laptop Backpack	6B8Y1UT
HP Renew Executive 16 Laptop Bag	6B8Y2AA
HP Travel 18 Liter 15.6 iron gray Laptop Backpack	6H2D9AA
HP Travel 25 Liter 15.6 iron gray Laptop Backpack	6H2D8AA
HP Travel Plus 15 Liter 14 Laptop Bag	A2CE2AA



Commodity	HP Travel Plus 22 Liter 16 Laptop Bag	A2CE1AA
	HP Travel Plus 30 Liter 17 Laptop Backpack	A2CE0AA
	HP USB DVD-Writer External ODD	F2B56AA
	HP 14-inch Widescreen Laptop Privacy Filter	BH0M6AA
	HP Combination Nano Cable Lock	63B28AA
	HP Essential Combination Nano Cable Lock	63B31AA
	HP Nano Keyed Cable Lock	1AJ39AA
Docking	HP Nano Master Keyed Cable Lock	1AJ40AA
	HP SureKey Standard/Nano/Wedge Cable Lock	6UW42AA
	HP Thunderbolt™ 100W G6 Dock	9X472AA,9X472UT
	HP Thunderbolt™ 180W G6 Dock	9X481AA,9X481UT
	HP Thunderbolt™ 280W G6 Dock	AW5L5AA,AW5M5UT
Hub	HP USB-C™ 100W G6 Dock	9X3V1AA,9X3V1UT
	HP 4K USB-C Multiport Hub	6G843AA
	HP Portable USB-C 4K HDMI Hub	BR1U0UT
	HP Portable USB-C Hub	B8SU8UT
	HP Universal USB-C Hub and Laptop Charger Combo	9H0H9AA
	HP Universal USB-C Multiport Hub	50H55UT
	HP USB-C to USB-A Hub	Z6A00AA
Mouse	HP USB-C Travel Hub G3	86S97UT
	HP 105 Black Wired Mouse	822M9AA,822M9UT
	HP 105 Mouse Pad	8X595AA
	HP 125 Wired Mouse	265A9UT
	HP 128 Laser Wired Mouse	265D9AA
	HP 205 Desk Mat	8X597AA
	HP 235 Slim Wireless Mouse	4E407UT
	HP 245 Black Bluetooth Mouse	81S67AA,81S67UT
	HP 255 Dual Wireless Mouse	8R3U1AA,8R3U1UT
	HP 285 Silent Wireless Mouse	6G4E6AA
	HP 320M Wired Mouse	9VA80AA
	HP 405 Quiet Black Wireless Mouse	AZ7B3AA
	HP 425 Programmable Wireless Mouse	7M1D5AA
	HP 435 Multi-Device Wireless Mouse	3B4Q5UT
	HP 515 Ultra-Fast Rechargeable Wireless Mouse	9C2F7AA
	HP 695 Qi-Charging Wireless Mouse	8F1Y4AA
	HP 705 Rechargeable Wireless Mouse	AZ7B1AA
	HP 715 Rechargeable Multi-Device Bluetooth Mouse	6E6F0AA
	HP 925 Ergonomic Vertical Wireless Mouse	6H1A5AA
	HP Tilt Ergonomic Mouse 725M	BH0Z5AA
	HP Travel USB Mouse	G1K28AA
	HP Ultra-Fast Scroll Wireless Mouse 785M	B8YX4AA
Power	HP 110W USB-C Laptop Charger	8B3Y2UT



QuickSpecs

HP Elite 6 G2i 14 inch Chromebook Plus

HP 140W USB-C Laptop Charger	B7NK0AA
HP 65W Gallium Nitride USB-C LC Laptop Charger	9Y3X5AA,9Y3X5UT
HP 65W LC USB-C AC power adapter	1P3K6AA
HP 65W LC USB-C AC power adapter	AJ7X5AA
HP 65W Gallium Nitride USB-C Laptop Charger	600Q8UT
HP 65W USB-C Laptop Charger	671R3UT
HP 56Wh Replaceable Laptop Battery	BF8G6AA



CHANGELOG

Date of change	Version History		Description of change
	V1 to V2		

© Copyright 2026 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Core, Thunderbolt and Intel vPro are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. USB Type-C® and USB-C® are trademarks of USB Implementers Forum. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

