


### Overview

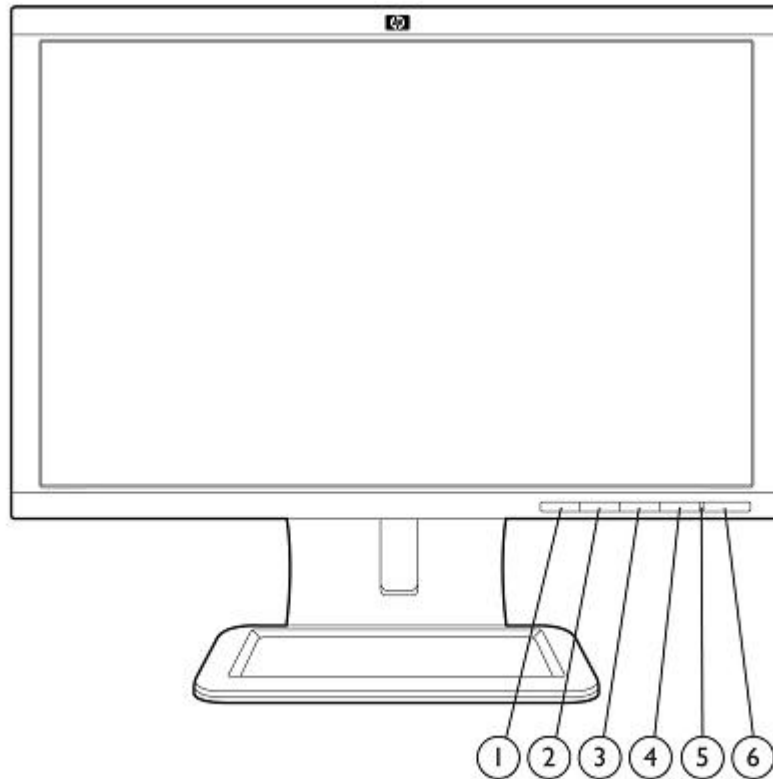

1. **Menu/select:** Opens, selects or exits the OSD menu.
2. **"-":** If the OSD menu is on, press to navigate backward through the OSD menu and decrease adjustment levels.
3. **"+"/source:** Select input source. If the OSD menu is on, press to navigate forward through the OSD menu and increase adjustment levels.
4. **OK/auto:** If the OSD menu is on, press to select the highlighted menu item. If the OSD menu is inactive, press to activate the auto adjustment feature to optimize the screen image.
5. **Power LED:** fully powered = green; sleep mode = amber; sleep timer mode = flashing amber.
6. **Power:** Turns the monitor on or off.

---

#### Part number

NL773AA#ABA

### Technical Specifications

<b>Panel</b>	<b>Type</b>	24-inch Wide-Aspect Active Matrix TFT (thin film transistor)
	<b>Viewable Image Area</b>	24 in (61 cm) widescreen; diagonally measured
	<b>Screen Opening (W x H)</b>	20.4 x 12.7 in (51.84 x 32.40 cm)
	<b>Panel Type</b>	TN
	<b>Aspect Ratio</b>	16:10
	<b>Viewing Angle (typical)</b>	Up to 160° horizontal/160° vertical (10:1 minimum contrast ratio)
	<b>Brightness (typical)*</b>	300 nits (cd/m <sup>2</sup> )
	<b>Contrast Ratio (typical)*</b>	1000:1
	<b>Dynamic Contrast Ratio (typical)*</b>	3000:1
	<b>Response Rate (typical)*</b>	5 ms (on/off)
	<b>Pixel Pitch</b>	0.270 mm
	<b>Backlight Lamp Life (to half brightness)</b>	40K hours
	<b>Color Gamut</b>	72% color gamut (NTSC)
	<i>*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.</i>	
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	OSD menu, OSD up, Source select/OSD down, Auto adjust/OK, Power. (from left to right)
	<b>Languages</b>	English, French, German, Spanish, Italian, Netherlands, Japanese, S. Chinese, T. Chinese and Brazilian Portuguese
	<b>User Controls</b>	Brightness, contrast, positioning, color temperature (6500k, 9300k, custom), individual color control, serial number, display, clock, clock phase, monitor management (power saver, sleep), factory reset
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	24 to 76 kHz
	<b>Vertical Frequency</b>	50 to 63 Hz
	<b>Native Resolution</b>	1920 x 1200 @ 60 Hz (WUXGA), 16.7 Million pixels
	<b>Preset VESA Graphic Modes (non-interlaced)</b>	1920 x 1200 @ 60 Hz
		1920 x 1080 @ 60 Hz
		1680 x 1050 @ 60 Hz
		1600 x 1200 @ 60 Hz
		1440 x 900 @ 60 Hz
		1280 x 1024 @ 60 Hz
		1280 x 960 @ 60 Hz
	1024 x 768 @ 60 Hz	
	800 x 600 @ 60 Hz	
	640 x 480 @ 60 Hz	
	<b>Text Mode</b>	Not supported
	<b>Mac Mode</b>	Not supported
	<b>Sun Mode</b>	Not supported

### Technical Specifications

	Maximum Pixel Clock Speed	200 MHz (analog input); 165 MHz (DVI and DP input)		
	User Programmable Modes	Yes, 25		
	Anti-Glare	Yes		
	Anti-Static	No		
	Default Color Temperature	6500 K		
Video/Other Inputs	Plug and Play	Yes		
	Self Powered USB 2.0 Hub	One upstream, two downstream ports (cable included)		
	Input Signal	VGA, DVI-D, and DisplayPort connectors; HDCP support		
	Input Impedance	75 ohms $\pm$ 10%		
	Sync Input	TTL separate synch		
	Video Cable	One DVI-D to DVI-D and one 15-pin D-sub (VGA)		
	Video Cable Lengths	VGA 5.9 ft (1.8 m), DVI-D 6.6 ft (2.0 m)		
Power	Input Power	Auto-Sensing, 100 to 240 VAC, 50 +/-3 Hz to 60 +/-3 Hz)		
	Frequency	47.5 to 63 Hz		
	Typical Power Consumption	35 watts (without USB)		
	Maximum	45 watts		
	Power Saving	< 2 watts standby; <1 watt off		
	Power Cable Length	6.2 ft (1.9 m)		
Mechanical	Dimensions (H x W x D)	Unpacked w/stand	15.0 to 19.2 x 21.9 x 11.0 in (38.05 to 48.75 x 55.68 x 27.84 cm)	
		Unpacked w/o stand (head only)	14.3 x 21.9 x 2.5 in (36.26 x 55.68 x 6.4 cm)	
		Packaged	9.1 x 25.9 x 21.7 in (23.0 x 65.9 x 55.1 cm)	
	Weight	Head Only	11.4 lb (5.2 kg)	
		Unpacked	17.4 lb (7.9 kg)	
		Packaged	24.6 lb (11.2 kg)	
	Tilt Range	-5° to + 30° vertical		
	Swivel Range	-170° to + 170°		
	Height Adjustable	Yes, up to 4.72 in (12.0 cm)		
	Pivot Rotation	Yes, 90° to portrait		
Base	Attachable, ships attached			
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)		
	Temperature – Non-operating	-29° to 140° F (-20° to 60° C)		
	Humidity – Operating	20% to 80% non-condensing		
	Humidity – Non-operating	5% to 95%, 38.7° C max wet-bulb		

### Technical Specifications

Options	Altitude – Operating	0 to 16,404 ft (0 to 5,000 m)
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)
	HP LCD Speaker Bar —Part number: NQ576AA	Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP LCD monitors. Features include dual speakers with full sound range and dual external headphone jacks. Sold separately. For more information, refer to the product's QuickSpecs.
	HP LCD Monitor Quick Release—Part number EM870AA*	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach a flat panel monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.
	HP Business PC Security Lock Kit—Part number PV606AA	Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.

\* The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) depending upon the mounting configuration used. Please note this is a total weight limit for all devices mounted, i.e. the combined weight of the monitor and a second device such as an HP Compaq Thin Client cannot exceed 24 pounds. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.

Other	Accessories Included	VGA cable, DVI-D to DVI-D cable, USB cable, power cable, user CD-ROM
	Software	HP Display Assistant is a software utility that enables theft deterrence and allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected PC.  HP Display LiteSaver allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.  Pivot software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Bezel Color	Brushed Aluminum and Black
	VESA External Mounting	Yes (one set of standard 4-hole pattern, 100 mm). Use of the top VESA 4-hole pattern will allow the user to set monitor head lower to the desk surface.
	Security Lock-Ready	Yes, one security lock slot available

### Technical Specifications

<b>Certifications and Compliance</b>	TCO Displays 5.0, ISO 9241-307, CISPR Requirements, VCCI Approvals, KC and KCC (Korean) Requirements, CSA 60950-1, UL 60950-1, EN55022 Class B, CNS 13438 Class B, IEC 60950-1, China Energy Label (CEL), China MEPS, Korea MEPS (pending, Energy Boy), SmartWay - NA only - Energy logistics, EUP Lot 6 Tier 1 AS/NZS 3548 Class B Approval, "GS" Mark, TUV Approvals, GEEA, CE Marking, FCC Part 15 class B Approval, ENERGY STAR® qualified, EN55024 Class B, EN60950 - 1, CUL, CCC, IT ECO (EDS), EPEAT® Gold (select regions)
<b>Compatibility</b>	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
<b>Service and Warranty</b>	<p>Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion.* With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.</p> <p>* HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <a href="http://www.hp.com/go/lookuptool">www.hp.com/go/lookuptool</a>. Additional HP Care Pack Services information by product is available at: <a href="http://www.hp.com/hps/carepack">www.hp.com/hps/carepack</a>. Service levels and response times for HP Care Packs may vary depending on your geographic location.</p>

---

© Copyright 2009 Hewlett-Packard Development Company, L.P.

ENERGY STAR is a registered mark owned by the U.S. government. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.