

VP2776T-4K - 27" COLORPRO™ 4K UHD IPS DOCKING MONITOR WITH 100W THUNDERBOLT 4, RJ45, DCI-P3 AND HDR400

Key Features

- 27 Inch 4K UHD (3840x2160p) IPS monitor with thin bezels and 60Hz refresh rate
- Enjoy lightning-fast data transfer speeds of up to 40 Gbps for data, video, and audio transmission while delivering up to 100W of power.
- 100% Adobe RGB, 95% DCI-P3 colors, and HDR400 for deep contrast.
- This monitor has been certified as capable of reproducing Pantone Matching System colors
- The VP2776T-4K supports laptops, PCs, Macs and more with Thunderbolt 4, USB-C, HDMI 2.1, DisplayPort, USB, and mini USB inputs




27
DISPLAY



IPS
PANEL



3840 x 2160
RESOLUTION

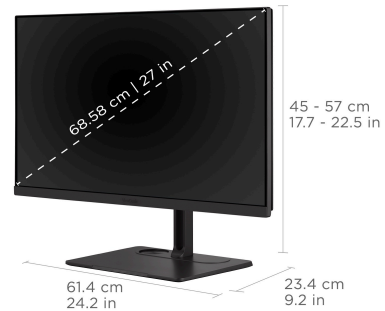

4K UHD (3840x2160p)
RESOLUTION

Product Description

The VP2776T-4K ColorPro™ Monitor is a powerhouse for creative professionals, engineers, programmers and more. This 27" Pantone Validated display delivers exceptional 4K visuals, accurate DCI-P3 colors, and HDR400 for deep contrast. Its integrated Thunderbolt 4 docking station offers 100W power delivery, RJ45 Ethernet, and multiple connectivity options such as DisplayPort, HDMI, and a USB hub for a streamlined workspace. With dual 4K daisy chaining via Thunderbolt 4, you can easily expand your display setup for maximum productivity.

Specifications

More Information


UPC

766907026061

Screen Size	27
Viewable Area (in.)	27
Panel Type	IPS
Display Resolution	3840 x 2160
Display Resolution	4K (3840x2160)
Static Contrast Ratio	2,000:1
Dynamic Contrast Ratio	20M:1
Light Source	LED
Brightness	400 cd/m2
Colors	1.07B
Color Space Support	10 bit (8 bit + FRC)
Aspect Ratio	16:9
Response Time (Typical GTG)	5ms
Viewing Angles	178° horizontal, 178° vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-Glare type, Hard-coating (3H), Haze 25%
Refresh Rate	60Hz
PC Resolution (max)	3840 x 2160
Mac® Resolution (max)	3840 x 2160
USB Type A	3
USB Type C	100W x 1, 15W x 1
USB Type C - Downstream	1 (15W)
Mini USB	1
3.5mm Audio Out	1
Ethernet LAN (RJ45)	1
HDMI 2.1 In	2
DisplayPort	1
Thunderbolt 4	2 (1 upstream / 1 downstream)
Internal Speakers	3W (x2)
Eco Mode (Conserve)	221
Eco Mode (optimized)	227
Consumption (typical)	235
Consumption (max)	250
Voltage	DC 24V
Stand-by	0.5
Power Supply	External

Cable Organization	No
Kensington Lock Slot	1
Physical Controls	Joystick key: Up, Right, Down, Left, Center; Power
On Screen Display	Input Select, Color Mode, ViewMode, Audio Adjust, Setup Menu
Temperature	32-104° F (0 - 40° C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	30 ~ 150 KHz
Frequency Vertical	24 ~ 75 Hz
Height Adjust	120 mm / 4.7 in
Swivel	120°
Pivot (Right/Left)	90° / 90°
Tilt (Forward/Back)	3° / 22°
Regulations	cTUVus, FCC-B ICES003, Energy Star, EPEAT, CEC, NRCAN
Net (lbs)	16.8
Net Without Stand (lbs)	9.3
Gross (lbs)	28.9
Net (kg)	7.6
Net Without Stand (kg)	4.2
Gross (kg)	13.1
Packaging (in.)	28.3 x 20.3 x 9
Physical (in.)	24.16 x 17.73 ~ 22.46 x 9.21
Physical Without Stand (in.)	24.16 x 14.32 x 2.20
Packaging (mm)	720 x 515 x 228
Physical (mm)	613.7 x 450.36 ~ 570.36 x 234
Physical Without Stand (mm)	613.7 x 363.85 x 55.8
Package Contents	LCD Display, DisplayPort Cable, HDMI Cable, Thunderbolt4 Cable, USB-C to USB-A Cable, Power Adaptor, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	Three-year limited warranty on parts, labor and backlight

UPC: 766907026061



Contact Sales
[ViewSonic.com](https://www.viewsonic.com)
 888.881.8781
 email: salesinfo@viewsonic.com