


### Overview

### HP Z4 Rack G5 Workstation

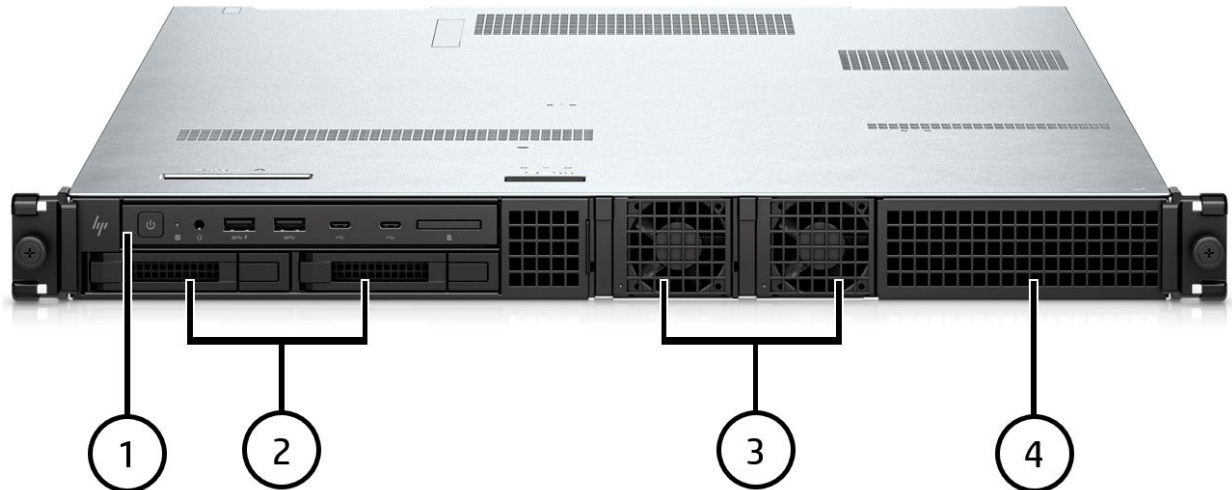


### Front view

1. Front I/O Premium (optional – show above)<sup>1</sup>:  
Power Button  
Headphone/microphone combo  
2 x SuperSpeed USB Type-A 5 Gbps signalling rate [left-most Type-A port supports BC1.2 (Battery Charging)]  
2 x SuperSpeed USB Type-C™ 20 Gbps signalling rate (USB Power Delivery 3.0),  
SD Card Reader  
  
Front I/O Entry:  
Power Button  
Headphone/microphone combo  
4 x SuperSpeed USB Type-A 5 Gbps signalling rate [left-most Type-A ports supports BC1.2 (Battery Charging)]  
SD Card Reader
2. 2 x 2.5" external drive bays for front-accessible NVMe storage
3. 2 x external 675W PSU bays (system can be configured with a single PSU or with dual PSUs configured in either Redundant or Aggregate Mode)
4. 1 x 3.5" drive bay (can be configured 1 x 3.5" Enterprise HDD or with 2 x M.2 drives via the HP 3.5 in Drive Cage Adapter)

<sup>1</sup> Front I/O Premium requires both 675W PSUs to be configured

### Overview

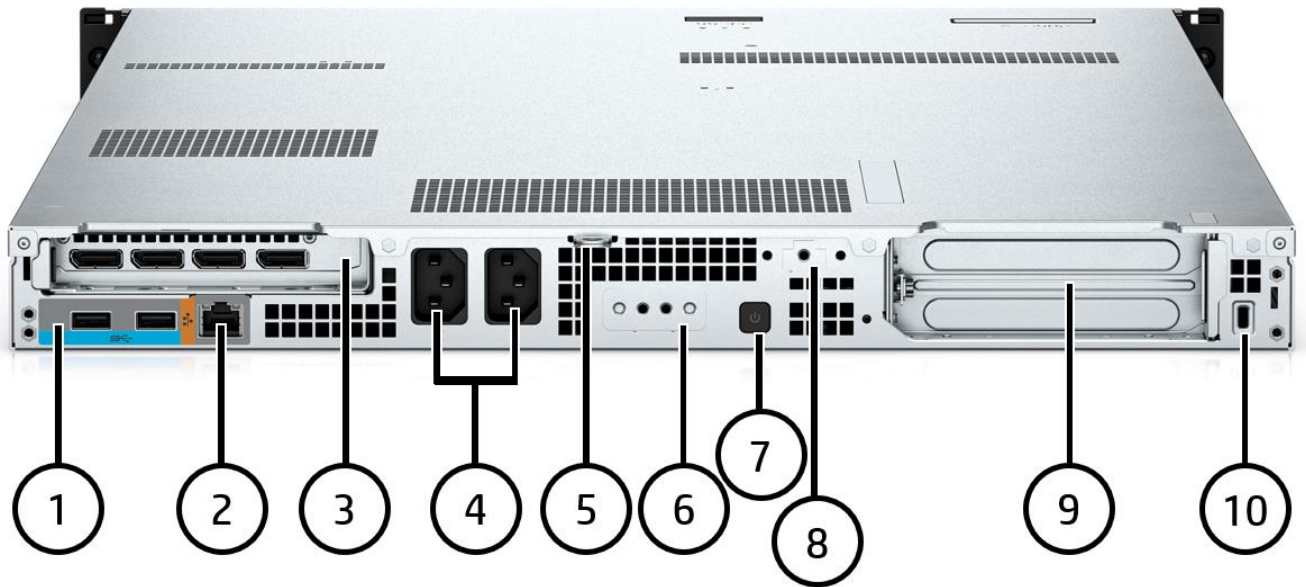

### Rear View

1. 2 x SuperSpeed USB Type-A 5 Gbps signalling rate
2. 1 x 1GbE RJ-45 (Intel® AMT enabled)
3. Single Slot Riser (1 PCIe Gen5 x16)<sup>1</sup>
4. Primary (left) and secondary (right) power supply cable connectors
5. Padlock loop
6. Flex I/O Module (optional)
7. Rear Power Button
8. Z Desktop Power and Signal Interface (optional – configured for use with the HP Anyware Remote System Controller)
9. Dual Slot Riser (1 PCIe Gen5 x16 mechanical (x16/x8 electrical); 1 PCIe 5 x16 mechanical (x8 electrical))<sup>2</sup>
10. Kensington Lock Slot

<sup>1</sup> The ports in the Single Slot Riser are dependent on the PCIe card that is configured there

<sup>2</sup> The Dual Slot Riser is optional, but required for double wide graphics cards and configurations with more than one PCIe

### Supported Components

## Overview

### Form Factor Operating Systems

1U Rackable Workstation

#### Preinstalled:

- Windows 11 Pro for Workstations<sup>1</sup>
- Ubuntu Linux 22.04
- HP Linux<sup>®</sup>-ready (minimal OS ready for customer OS installation)<sup>3,4</sup>

#### License Only:

- Red Hat<sup>®</sup> Enterprise Linux<sup>®</sup> Desktop Workstation (includes paper license with 1 year support; no preinstalled OS)<sup>4</sup>

#### Supported:

- Windows 11, version 22H2, 21H2<sup>1</sup>
- Windows 10, version 22H2, 21H2<sup>1</sup>
- Red Hat<sup>®</sup> Enterprise Linux<sup>®</sup> Workstation 8 & 9<sup>4</sup>
- SUSE Linux<sup>®</sup> Enterprise Desktop 15<sup>4</sup>
- Ubuntu 20.04 & 22.04 LTS<sup>3,4</sup>

#### Web-supported only:

- Windows 11 Enterprise<sup>1,5</sup>
- Windows 10 Enterprise<sup>1,5</sup>

<sup>1</sup> Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software, or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply, and additional requirements may apply over time for updates. See <http://www.windows.com>.

<sup>3</sup>A certified preloaded version of Ubuntu<sup>®</sup> 20.04 LTS is available from HP for this platform.

<sup>4</sup>For detailed Linux<sup>®</sup> OS/hardware support information, see:

[http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

<sup>5</sup> Windows Enterprise sold separately and requires that customer have an enterprise license from Microsoft.

**NOTE:** Your product does not support Windows 8 or Windows 7. In accordance with Microsoft's support policy, HP does not support the Windows<sup>®</sup> 8 or Windows 7 operating system on products configured with Intel<sup>®</sup> and AMD<sup>®</sup> 7th generation and forward processors or provide any Windows<sup>®</sup> 8 or Windows 7 drivers on <http://www.support.hp.com>. A full list of HP products and the Windows 10 versions tested is available on the HP support website. <https://support.hp.com/us-en/document/c05195282>

### Supported Components

Name <sup>1</sup>	Cores	Threads	Frequency (GHz)			Cache (MB)	Max Memory Speed (MT/s)		TDP (W)
			Base Clock Speed	Intel® Turbo Boost Max All-Core Frequency <sup>2</sup>	Intel® Turbo Boost Max Single-Core Frequency <sup>2</sup>		1 DIMM per Channel	2 DIMM per Channel	
Intel® Xeon® W7-2495X	24	48	2.5	3.3	4.6	45	4800	4400	225
Intel® Xeon® W7-2475X	20	40	2.6	3.4	4.6	37.5	4800	4400	225
Intel® Xeon® W5-2465X	16	32	3.1	3.7	4.5	33.75	4800	4400	200
Intel® Xeon® W5-2455X	12	24	3.2	3.9	4.4	30	4800	4400	200
Intel® Xeon® W5-2445	10	20	3.1	4.0	4.4	26.25	4800	4400	175
Intel® Xeon® W3-2435	8	16	3.1	4.0	4.3	22.5	4400	4400	165
Intel® Xeon® W3-2425	6	12	3.0	3.7	4.2	15	4400	4400	130
Intel® Xeon® W3-2423	6	12	2.1	3.1	4.0	15	4400	4400	120

#### Notes:

- Xeon W-2400 processors all feature Intel® vPro® Technology<sup>3</sup>
- Xeon W-2400 processors all support Hyper-Threading
- Xeon W-2400 processors do not offer integrated graphics

<sup>1</sup> Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

<sup>2</sup> Intel Turbo Boost Max (ITBM) performance varies depending on hardware, software, and overall system configuration. See <http://www.intel.com/technology/turboboost> for more information.

<sup>3</sup> Intel vPro® requires Windows 10 Pro 64 bit or higher, a vPro supported processor, vPro enabled chipset, vPro enabled wired LAN and/or Wi-Fi 6E WLAN and TPM 2.0. Some functionality requires additional 3rd party software in order to run. Features of vPro® Essentials and Enterprise vary. See <http://intel.com/vpro>

### Supported Components

<b>Expansion Slots</b> (see system board section for more details)	<p><b>Slot 1 (SSR<sup>1</sup>):</b> PCI Express Gen5 x16 from CPU</p> <p><b>Slot 2 (DSR<sup>2</sup>):</b> PCI Express Gen5 x16 from CPU - operates as x8 if Slot 3 is loaded</p> <p><b>Slot 3 (DSR):</b> PCI Express Gen5 x16 (wired as x8) from CPU</p> <p><b>M.2 Slot 1:</b> PCI Express Gen4 x4 from CPU</p> <p><b>M.2 Slot 2:</b> PCI Express Gen4 x4 from CPU</p> <p><sup>1</sup> SSR = Single slot riser. Includes single 6+2 pin auxiliary power cable</p> <p><sup>2</sup> DSR = Dual slot riser. DSR is optional but required for double wide graphics cards and configurations with more than one PCI card. DSR includes and additional dual 6+2 pin auxiliary power cable</p>
<b>Expansion Bays</b> (see storage section for more details)	<p>2 external 2.5" bays</p> <p>1 external 3.5" bay (can be configured with 1 x 3.5" hard drive or 2 x 2.5" adapter for supporting 2 additional M.2 drives)</p>
<b>Front I/O</b>	<p>Front I/O Premium:<sup>1</sup> 2 SuperSpeed USB Type-C™ 20 Gbps signaling rate (USB Power Delivery 3.0), 2 SuperSpeed USB Type-A 5 Gbps signaling rate, 1 headphone/microphone combo, SD card reader (optional). [left-most Type-A ports supports BC1.2 (Battery Charging)]</p> <p>Front I/O Entry: 4 SuperSpeed USB Type-A 5 Gbps signaling rate, 1 headphone/microphone combo, SD card reader (optional). [left-most Type-A ports supports BC1.2 (Battery Charging)]</p> <p><sup>1</sup> Front I/O Premium requires both 675W PSUs to be configured</p>
<b>Internal I/O</b>	3 Internal USB ports and 1 SATA 3 port
<b>Rear I/O</b>	<p>2x USB 3.1 G1 Type-A</p> <p>1x 1GbE LAN port (supporting Intel AMT)</p>
<b>Optional I/O</b>	Flex I/O Module (Serial Port v3, 10GbE single port, 2.5GbE LAN single port, 1 GbE Fiber LC NIC) Z Desktop Power and Signal Interface for supporting the HP Anyware Remote System Controller
<b>Chassis Dimensions</b>	
Base footprint without front bezel and rack brackets (H x W x D)	<p>H: 1.685" (43mm)</p> <p>W: 17.25" (438mm)</p> <p>D: 25.8" (654mm)</p>
With front bezel and rack brackets (H x W x D)	<p>H: 1.685" (43mm)</p> <p>W: 18.96" (487mm)</p> <p>D: 25.8" (675mm)</p>
<b>Packaged Dimensions</b>	<p>H: 8.66" (220mm)</p> <p>W: 23.23" (590mm)</p> <p>D: 35.43" (900mm)</p>
<b>Palletization Profile</b>	2 units per layer x 8 layers = 16 units per pallet 1200x1000x1890mm (included pallet)
<b>Rack Dimensions</b>	1U
<b>Weight</b>	<p>Exact weights depend upon configuration (System weight only).</p> <p>Minimum: 9.52kg (21.6lb)</p> <p>Standard: 11.7kg (25.8lb)</p> <p>Maximum: 12.1kg (26.7lb)</p>
<b>Temperature</b>	<p>Operating: 5° to 40°C (40° to 104°F)<sup>1</sup></p> <p>Non-operating: -40° to 60°C (-40° to 140°F)</p> <p><sup>1</sup>40°C has been validated for (add configuration information)</p> <p>Above 1524 m (5,000 feet) altitude, the maximum operating temperature is reduced by 1° C (1.8° F) for every 305 m (1,000 feet) increase in elevation</p> <p>Maximum rate of change: 10 °C/hr</p> <p>No direct sustained sunlight</p>

### Supported Components

<b>Humidity</b>	Operating: 8% to 85% relative humidity, non-condensing, 35° C maximum wet bulb Non-operating: 8% to 90% relative humidity, non-condensing, 35° C maximum wet bulb
<b>Maximum Altitude (non-pressurized)</b>	Operating (with Rotational Hard Drives): 3,048 m (10,000 feet) Operating (with only Solid-State Drives): 5,000 m (16,404 feet) Non-operating: 12,192 m (40,000 feet) Maximum operating temperature is reduced as altitude increases. See Temperature for details.
<b>Power Supply</b>	The Z4 Rack G5 675W power supply efficiency report can be found at this link: <a href="https://www.clearesult.com/80plus/ENTRY">https://www.clearesult.com/80plus/ENTRY</a> ENTRY Contains one (1) PSU 675W power supply. ENTRY REDUNDANT Contains two (2) 675W PSUs operating in redundant mode for a maximum system power of 675W. <b>NOTE:</b> All power cords supplied by HP for Desktop Workstations are between 1.83m and 2.5m (dependent on country localization and platform).” HIGH-END Contains two (2) 675W PSUs operating in aggregate mode for a total system power of 1350W (2x675W).
<b>Workstation ISV Certifications</b>	See the latest list of certifications at <a href="http://www8.hp.com/us/en/campaigns/workstations/industries-and-partners.html">http://www8.hp.com/us/en/campaigns/workstations/industries-and-partners.html</a>
<b>Chipset</b>	Intel® W790 chipset
<b>Memory</b>	4 DIMM slots, supporting up to 256GB, DDR5 4800 MT/s speed depending on the system configuration

### Supported Components

Processors	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Intel® Xeon® W-2400 Processors</b>				
Intel® Xeon® W7-2495X	Y	N		
Intel® Xeon® W7-2475X	Y	N		
Intel® Xeon® W5-2465X	Y	N		
Intel® Xeon® W5-2455X	Y	N		
Intel® Xeon® W5-2445	Y	N		
Intel® Xeon® W3-2435	Y	N		
Intel® Xeon® W3-2425	Y	N		
Intel® Xeon® W3-2423	Y	N		

SATA Hard Drives	Factory Configured	Option Kit	Option Kit Part Number
1TB 7200RPM SATA 3.5in Enterprise HDD <sup>1</sup>	Y	Y	WOR10AA
2TB 7200RPM SATA 3.5in Enterprise HDD <sup>1</sup>	Y	Y	2Z274AA
4TB 7200 RPM SATA 3.5in Enterprise HDD <sup>1</sup>	Y	Y	K4T76AA/AT
8TB 7200RPM SATA 3.5in Enterprise HDD <sup>1</sup>	Y	Y	2Z273AA
12TB 7200 RPM SATA-6G 3.5in Enterprise HDD <sup>1</sup>	Y	Y	5S461AA

PCIe Solid State Drives	Factory Configured	Option Kit	Option Kit Part Number
Z Turbo 512GB PCIe-4x4 TLC SSD Module	Y	Y	38T80AA
Z Turbo 512GB 2280 PCIe-4x4 SED OPAL2 TLC M.2 SSD Module	Y	Y	38T81AA
Z Turbo 1TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 SSD Module	Y	Y	38T76AA
Z Turbo 1TB PCIe-4x4 TLC SSD Module	Y	Y	38T77AA
Z Turbo 2TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 SSD Module	Y	Y	38T79AA
Z Turbo 2TB PCIe-4x4 TLC SSD Module	Y	Y	38T75AA
Z Turbo 4TB 2280 PCIe-4x4 TLC M.2 SSD Module	Y	Y	5S496AA/AT
Z Turbo 4TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 SSD Module	Y	Y	5S497AA/AT
<b>HP Z Turbo Drive Dual Pro</b>			
HP Z Turbo Drive Dual Pro PCIe-4x4 NVMe Carrier <sup>2</sup>	Y	Y	56Q86AA

**Note 1:** Up to (1) 3.5-inch 7200 rpm SATA drive

**Note 2:** Kit includes Dual Pro carrier and heatsink. Requires separate purchase of ZTurbo PCIe 4x4 M.2 SSD modules.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

### Supported Components

Graphics		Factory Configured	Option Kit	Option Kit Part Number	Supported # of cards
<b>Graphics Adapters</b>	HP DisplayPort To VGA Adapter	N	Y	AS615AA/AT	
	HP DisplayPort To VGA Adapter	N	Y	F7W97AA	
	HP DisplayPort to HDMI Adapter	Y	Y	2JA63AA	
	HP (Bulk 12) miniDP-to-DP Adapter Cables	N	Y	2KW87A6	
	HP Single miniDP-to-DP Adapter Cable	Y	Y	2MY05AA	
	HP miniDP-to-DP Adapter (2-pack)	Y	N		
	HP miniDP-to-DP Adapter (4-pack)	Y	N		
	HP DisplayPort to DVI Adapter	Y	Y	FH973AA	
<b>Ultra-High-End Graphics</b>	NVIDIA® RTX 6000 Ada 48GB <sup>2</sup>	Y	Y	79C23AA	1
	NVIDIA® RTX A6000 48GB <sup>1</sup>	Y	Y	2S6U3AA/AT	1
	NVIDIA® RTX A5000 24GB <sup>1</sup>	Y	Y	20X23AA/AT	1
<b>High-End Graphics</b>	NVIDIA® RTX A4500 20GB <sup>1</sup>	Y	Y	5S458AA/AT	1
	NVIDIA® RTX A4000 16GB <sup>1</sup>	Y	Y	20X24AA/AT	2
	AMD® Radeon™ Pro W6800 32GB <sup>1</sup>	Y	Y	340K7AA	1
<b>Midrange Graphics</b>	NVIDIA® RTX A2000 12GB <sup>1</sup>	Y	Y	5Z7D9AA/AT	1
	NVIDIA® T1000 8GB <sup>2</sup>	Y	Y	5Z7D8AA/AT	1
<b>Entry</b>	NVIDIA® T400 4GB <sup>2</sup>	Y	Y	5Z7E0AA/AT	1

**Note 1:** Graphics card requires both 675W power supplies to be configured.

**Note 2:** Dual graphics configuration is tested and supported by HP, but not configurable from the factory. The customer will be responsible for purchasing a second graphics card aftermarket and integrating it themselves.

Memory	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
16GB (1x16GB) DDR5 4800 DIMM ECC REG Memory	Y	N		
32GB (2x16GB) DDR5 4800 DIMM ECC REG Memory	Y	N		
32GB (1x32GB) DDR5 4800 DIMM ECC REG Memory	Y	N		
64GB (4x16GB) DDR5 4800 DIMM ECC REG Memory	Y	N		
64GB (2x32GB) DDR5 4800 DIMM ECC REG Memory	Y	N		
64GB (1x64GB) DDR5 4800 DIMM ECC REG Memory	Y	N		
128GB (4x32GB) DDR5 4800 DIMM ECC REG Memory	Y	N		
128GB (2x64GB) DDR5 4800 DIMM ECC REG Memory	Y	N		
256GB (4x64GB) DDR5 4800 DIMM ECC REG Memory	Y	N		
<b>After Market Options</b>				
16GB DDR5 (1x16GB) 4800 DIMM ECC REG Memory	Y	Y	340K1AA	
32GB DDR5 (1x32GB) 4800 DIMM ECC REG Memory	Y	Y	340K2AA	
64GB DDR5 (1x64GB) 4800 DIMM ECC REG Memory	Y	Y	340K3AA	

Multimedia and Audio Devices	Factory Configured	Option Kit	Option Kit Part Number
Integrated Realtek ALC3205-CG Audio	Y	N	



### Supported Components

Internal and Removable Storage	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Z Turbo 512GB PCIe-4x4 TLC Z4 Rack Kit SSD	Y	Y	7K6A5AA	
Z Turbo 512GB PCIe-4x4 SED OPAL2 TLC Z4 Rack Kit SSD	Y	Y	7K6A6AA	
Z Turbo 1TB PCIe-4x4 SED OPAL2 TLC Z4 Rack Kit SSD	Y	Y	7K6A7AA	
Z Turbo 1TB PCIe-4x4 TLC Z4 Rack Kit SSD	Y	Y	7K6A8AA	
Z Turbo 2TB PCIe-4x4 TLC Z4 Rack Kit SSD	Y	Y	7K6A9AA	
Z Turbo 2TB PCIe-4x4 SED OPAL2 TLC Z4 Rack Kit SSD	Y	Y	7K6B0AA	
Z Turbo 4TB PCIe-4x4 TLC Z4 Rack Kit SSD	Y	Y	7K6B1AA	
Z Turbo 4TB PCIe-4x4 SED OPAL2 TLC Z4 Rack Kit SSD	Y	Y	7K6B2AA	

Networking and Communications	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP 10GBase-T Flex Port	Y	Y	56Q71AA	
HP 2.5GbE LAN Flex Port	Y	Y	169K0AA/AT	
HP 1GbE Fiber LC Single Flex Port	Y	Y	20J15AA	
Intel X550-T2 10GBASE-T Dual Port NIC	Y	Y	1QL46AA	
Intel I225-T1 Single Port 2.5GbE PCIe NIC	Y	Y	406L9AA	
Allied Telesis AT-2914SX/LC-901 1GB LC Fiber NIC	Y	Y	1C7Q2AA	
Allied Telesis AT-2911T/2-901 Dual Port 1GbE NIC	Y	Y	6E3Y9AA/AT	
NVIDIA Mellanox ConnectX-6 DX Dual Port 10/25GbE SFP28 NIC	Y	Y	436M8AA	1
HP 10GbE SFP+ SR/SW LC Fiber Optic Transceiver	Y	Y	860T8AA	
HP 25GbE SFP28 LC Fiber Optic Transceiver	Y	Y	860T9AA	
Intel Ethernet I350-T4 4-Port 1Gb NIC	N	Y	W8X25AA	

**Note 1:** 3<sup>rd</sup> party transceivers sold separately. You must have a transceiver installed to connect this card to a network.

HP Anyware Remote System Controller	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Anyware Remote System Controller	Y	Y	7K6D7AA	
HP Anyware Remote System Controller Main Board Adapter	Y	Y	7K6D8AA	
HP Anyware Integrated Remote System Controller	Y	Y	7K6D9AA	
HP Anyware Remote System Controller for Universal KVM	N	Y	7K7N2AA	

Racking and Physical Security	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Z4 Rack Rail Rack Kit	Y	Y	16G60AA/AT	
HP Z4 Rack Front Bezel	Y	Y	16G58AA/AT	
HP Z4 Rack Remote System Controller Support Bracket	Y	N	8D0Q8AA	1
HP Rack Cable Management Arm	N	Y	35Z34AA	

### Supported Components

**Note 1:** This offering is a bracket to support the HP Anyware Remote System Controller.

Input Devices	Factory Configured	Option Kit	Option Kit Part Number
HP 320K Wired Keyboard	Y	Y	9SR37AA/ET/UT
HP Wired 320M Mouse	Y	Y	9VA80AA/ET/UT

**NOTE:** Keyboard and Mouse are optional or add on features.

Other Hardware	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Internal Serial Port and PS/2 Port	Y	Y	141K9AA/AT	
HP Z4 Rack Dual PCIe Slot Riser Kit	Y	Y	7K6C7AA	
HP Serial Port v3 Flex IO	Y	Y	5B895AA	
HP Z4 Rack 2.5 in Drive Carrier	Y	Y	7K6C3AA	1
HP Z4 Rack 2.5 in M.2 Adapter Carrier	Y	Y	7K6C4AA	1
HP Z4 Rack G5 2.5 in Dual Drive Cage Adapter	Y	Y	7K6C5AA	1
HP Z4 Rack G5 3.5 in Drive Cage Adapter	Y	Y	7K6C6AA	1
HP Internal USB Port Kit	N	Y	EM165AA	
HP Type-C SuperSpeed USB 20Gbps Front IO v2 Premium Module	Y	Y	38T92AA	
C13 1.83m Power Cord Kit	N	Y	6Z1T9AA	

**Note 1:** These carriers and adapters do not include storage devices. When ordering storage devices CTO, the necessary carrier or adapter is included. When ordering these carriers or adapters aftermarket, storage devices must be purchased separately.

Software	Factory Configured	Option Kit	Support Notes
Data Science Stack	Y	N	1
WSL2/Ubuntu Data Science Stack	Y	N	1
HP Anyware 90 Day Trial	Y		
HP Anyware 1 Year License	Y		
HP Anyware 3 Year License	Y		

**Note 1:** Only available with Ubuntu and NVIDIA® graphics.

### Supported Components

#### Operating Systems

Windows 11 Pro for Workstations <sup>1,2</sup>  
Ubuntu 22.04 LTS <sup>3</sup>  
HP Linux<sup>®</sup>-ready

<sup>1</sup> Windows Enterprise sold separately and requires that customer have an enterprise license from Microsoft.

<sup>2</sup> Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software, or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply, and additional requirements may apply over time for updates. See <http://www.windows.com>.

<sup>3</sup> Not all features are available in all editions or versions of Ubuntu. Systems may require upgraded and/or separately purchased hardware, drivers, software, or BIOS to take full advantage of Ubuntu functionality. Ubuntu may be automatically updated. ISP fees may apply, and additional requirements may apply over time for updates.

**NOTE:** Your product does not support Windows 8 or Windows 7. In accordance with Microsoft's support policy, HP does not support the Windows<sup>®</sup> 8 or Windows 7 operating system on products configured with Intel<sup>®</sup> and AMD<sup>®</sup> 7th generation and forward processors or provide any Windows<sup>®</sup> 8 or Windows 7 drivers on <http://www.support.hp.com>. A full list of HP products and the Windows 10 versions tested is available on the HP support website. <https://support.hp.com/us-en/document/c05195282>

#### HP BIOS

Key features of the HP BIOS include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP Z4 Rack G5 Workstation into the enterprise, such as PXE, remote recovery, remote configuration, remote control, and BIOS (F10) Setup support for 15 languages.
- Network firmware updates – Update your BIOS via the cloud or standardize on a BIOS version hosted on an Enterprise network.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Class 3 UEFI specification version 2.7.
- Absolute Persistence agent – For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Workstation computer in any enterprise environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information. Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Workstation computers, including BIOS updates from within Windows (HP Firmware Update and Recovery), Capsule update, HP Client Manager, and fail-safe recovery. In addition, the HP BIOS Configuration Utility enables replication of BIOS settings within Windows while the Replicated Setup feature provides the same capability within BIOS (F10) Setup. The BIOS Configuration Utility is available from the HP support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery. Additional HP BIOS Features:
  - Power-On password – Helps prevent an unauthorized user from powering on the system.

### Supported Components

- Administrator password – Also known as the BIOS Setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS cannot be updated, and changes cannot be made to BIOS settings using BIOS Setup or under the OS.
- S4/S5 Maximum Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 0.5W in S4/S5 (when turned off). When S4/S5 Maximum Power Savings feature is enabled below features are turned off:
  - Power to expansion connectors / slots.
  - Most Wake events other than power buttons and WOL (Wake on LAN supported by embedded Lan controller under S4/S5 Maximum Power Saving Enabled).
  - USB charging ports.

#### HP Sure Start Gen 7

- BIOS Integrity checking – Sure Start protection ensures that only trusted BIOS code is executed and not rootkits, viruses, and malware. Verification is done upon boot up, shutdown and while the system is on.
- Sure Start is set by default to automatically repair the BIOS if corrupted or compromised but is policy driven for better manageability. Start is set by default to automatically repair the BIOS if corrupted or compromised but is policy driven for better manageability.
- Protecting beyond BIOS – Integrity checking, and repair is extended to other data that should be protected such as network configuration parameters, platform specific information (i.e., system IDs), secure boot credentials, and other code the system needs to boot.
- Audit enabled – System Audit via Sure Start Event Logs capture data such as incident, repair date and time for troubleshooting and investigating

## SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

### Software

HP Support Assistant <sup>14</sup>

HP Image Assistant

HP Desktop Support Utility

HP Documentation

HP Notifications

HP PC Hardware Diagnostics UEFI

HP PC Hardware Diagnostics Windows

HP Performance Advisor<sup>1</sup>

myHP

HP Smart Health<sup>21</sup>

WSL/Ubuntu Data Science Stack

HP Privacy Settings

Touchpoint Customizer for Commercial

Kingsoft WPS Office

### Manageability Features

HP Driver Packs<sup>2</sup>

HP UWP Pack

HP System Software Manager (SSM)

HP Manageability Integration Kit Gen4<sup>3</sup>

HP Smart Support<sup>5</sup>

HP Client Catalog (download)

HP Image Assistant (download)

HP Cloud Recovery

HP Client Management Script Library (download)

### Supported Components

HP BIOSphere Gen6 <sup>13</sup>

Client Security Software

HP Client Security Suite Gen7<sup>4</sup> including: (including Credential Manager, HP Password Manager<sup>6</sup>, HP Spare Key)

HP Power On Authentication

Microsoft Defender<sup>7</sup>

Security Management

HP Secure Erase <sup>16</sup>

HP Wolf Pro Security Edition (optional) <sup>18</sup>

HP Platform Certificates

HP Wolf Security for Business<sup>22</sup> Includes:

HP Sure Click<sup>11</sup>

HP Sure Sense<sup>12</sup>

HP Sure Run Gen5<sup>9</sup>

HP Sure Recover Gen4 <sup>10</sup>

HP Sure Start Gen7<sup>8</sup>

HP Tamper Lock

HP Sure Admin <sup>17</sup>

HP Client Security Manager Gen 7<sup>4</sup>

HP Security Update Service

<sup>1</sup> HP Performance Advisor is ready and waiting to help you get the most out of your HP Workstation from day one—and every day after. Learn more or download at: <https://www.hp.com/us-en/workstations/performanceadvisor.html>

<sup>2</sup> HP Driver Packs not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>.

<sup>3</sup> HP Manageability Integration Kit can be downloaded from <http://www.hp.com/go/clientmanagement>

<sup>4</sup> HP Client Security Manager Gen7 requires Windows and is available on the select HP PCs.

<sup>5</sup> HP Smart Support automatically collects the telemetry necessary upon initial boot of the product to deliver device-level configuration data and health insights and is available preinstalled on select products, thru HP Factory Configuration Services; or it can be downloaded. For more information about how to enable HP Smart Support or for download, please visit <http://www.hp.com/smart-support>.

<sup>6</sup> HP Password Manager requires Internet Explorer or Chrome or FireFox. Some websites and applications may not be supported. User may need to enable or allow the add-on / extension in the internet browser.

<sup>7</sup> Microsoft Defender Opt in and internet connection required for updates.

<sup>8</sup> HP Sure Start Gen 7 is available on select HP PCs and workstations. See product specifications for availability.

<sup>9</sup> HP Sure Run Gen5 is available on select Windows 11 based HP Pro, Elite and Workstation PCs with select Intel® or AMD processors

<sup>10</sup> HP Sure Recover Gen4 is available on select HP PCs and requires Windows 10 and an open network connection. You must back up important files, data, photos, videos, etc. before using HP Sure Recover to avoid loss of data. Network based recovery using Wi-Fi is only available on PCs with Intel Wi-Fi Module

<sup>11</sup> HP Sure Click requires Windows 10 Pro or higher or Enterprise. See [https://bit.ly/2PrLT6A\\_SureClick](https://bit.ly/2PrLT6A_SureClick) for complete details.

<sup>12</sup> HP Sure Sense requires Windows 11 Pro or Enterprise and supports Microsoft Internet Explorer, Google Chrome™, and Chromium™. Supported attachments include Microsoft Office (Word, Excel, PowerPoint) and PDF files in read only mode, when Microsoft Office or Adobe Acrobat are installed.

<sup>13</sup> HP BIOSphere Gen6 features may vary depending on the platform and configurations.

<sup>14</sup> HP Support Assistant requires Windows and Internet access.

<sup>16</sup> Secure Erase - For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88 "Clear" sanitation method. HP Secure Erase does not support platforms with Intel® Optane.

<sup>17</sup> HP Sure Admin requires Windows 11, HP BIOS, HP Manageability Integration Kit from <http://www.hp.com/go/clientmanagement> and HP Sure Admin Local Access Authenticator smartphone app from the Android or Apple store.

### Supported Components

<sup>18</sup> HP Wolf Pro Security Edition is available preloaded on select SKUs and, depending on the HP product purchased, includes a paid 1-year, 3-year, 4-year, or 5-year license. The HP Wolf Pro Security Edition software is licensed under the license terms of the HP Wolf Security Software - End-User license Agreement (EULA) that can be found at: [https://support.hp.com/us-en/document/ish\\_3875769-3873014-16](https://support.hp.com/us-en/document/ish_3875769-3873014-16) as that EULA is modified by the following: “7. Term. Unless otherwise terminated earlier pursuant to the terms contained in this EULA, the license for the HP Wolf Pro Security Edition (HP Sure Sense Pro and HP Sure Click Pro) is effective upon activation and will continue for either a twelve (12) month or thirty-six (36) month license term (“Initial Term”). At the end of the Initial Term you may either (a) purchase a renewal license for the HP Wolf Pro Security Edition from HP.com, HP Sales or an HP Channel Partner, or (b) continue using the standard versions of HP Sure Click and HP Sure Sense at no additional cost with no future software updates or HP Support.

<sup>21</sup> HP Smart Health automatically collects the telemetry necessary upon initial boot of the product to deliver device-level configuration data and health insights and is available preinstalled on select products, thru HP Factory Configuration Services; or it can be downloaded. For more information about how to enable HP Smart Support or for download, please visit <http://www.hp.com/smart-support>.

<sup>22</sup> HP Wolf Security for Business requires Windows 10 or 11 or higher, includes various HP security features and is available on HP Pro, Elite, RPOS and Workstation products. See product details for included security features.

<sup>23</sup> Kingsoft WPS office is only available in China.

### System Technical Specifications

#### System Board

<b>Processor Socket</b>	Single LGA-4677	
<b>CPU Bus Speed</b>	DMI Gen4 x 8 lanes	
<b>Chipset</b>	Intel W790 Alder Lake – WS PCH	
<b>Super I/O Controller</b>	Nuvoton SIO21	
<b>Memory Expansion Slots</b>	4 DDR5 memory slots	
<b>Memory Type Supported</b>	DDR5, RDIMM (Registered) ECC	
<b>Memory Modes</b>	Non- Interleaved for single channel. Interleaved when multiple channels are populated	
<b>Memory Speed Supported</b>	4800MT/s for 1DPC	
<b>Memory Protection</b>	ECC on data	
<b>Maximum Memory</b>	256GB	
<b>Memory Configuration (Supported)</b>	16GB, 32GB and 64GB RDIMMs are supported. (64GB RDIMM cannot be mixed with other module capacities in the same system)	
<b>NVDIMM Memory</b>	No	
<b>PCI Express Connectors</b>	Standard PCIe Slots <ul style="list-style-type: none"> <li>• 1 PCI Express Gen5 slot x16 mechanical/ x16 electrical (full height, full length)</li> </ul> Optional PCIe Slots <ul style="list-style-type: none"> <li>• 1 PCI Express Gen5 slot x16 mechanical/ x16 electrical (full height, full length)<sup>1</sup></li> <li>• 1 PCI Express Gen5 slot x16 mechanical/ x8 electrical (full height, full length)</li> </ul> <sup>1</sup> Slot 2 operates as x8 electrically if slot 3 is populated M.2 Slots: <ul style="list-style-type: none"> <li>• 2 PCI Express Gen4 slot x4.</li> </ul>	
	Other PCIe Connections <ul style="list-style-type: none"> <li>• 2 external 2.5" bays support 2 additional NVMe SSDs drives</li> <li>• 1 external 3.5" bay (can be configured with 1 x 3.5" hard drive or 2 x 2.5" adapter for supporting 2 additional M.2 drives)</li> </ul>	
<b>Supported Drive Interfaces</b>	<b>SATA</b>	Number of SATA ports: 1 Intel® SATA controller: primary SATA
	<b>Integrated RAID</b>	On-board RAID Support: None
		Factory Configured RAID: None
	<b>Integrated Graphics</b>	No
	<b>Network Controller</b>	Intel WGI219LM WGI219LM LOM provides Management capabilities: WOL, PXE 2.1, and AMT 16.10
	<b>External SATA (eSATA)</b>	No
	<b>Serial</b>	Available with optional Flex I/O module
	<b>2nd Serial</b>	No
	<b>HD Integrated Audio</b>	Yes
<b>USB Connector(s)</b>	<b>Front</b>	Front I/O Entry: 4 USB 3.1 Gen1 Type-A (left-most port supports Battery Charging 1.2)
		Front I/O Premium: 2x USB 3.2 Gen2x2 Type-C™ (Power Delivery 3.0) 2x USB 3.1 Gen1 Type-A (left-most port supports Battery Charging 1.2)
		<ul style="list-style-type: none"> <li>• USB Type-C Ports provide 3 Amps @ 5 Volts</li> </ul>

### System Technical Specifications

- Charging USB Type-A port provides 1.5 Amps @ 5 Volts
- Standard USB Type-A Ports provide 900mA @ 5 Volts

	<b>Rear</b>	2x USB 3.1 Gen1 Type-A
	<b>Internal</b>	1 USB 3.2 Gen1 header, with a single 12-pin shrouded connector. This header supports a USB Media Card reader. 1 USB 2.0 single port header 1 USB 2.0 dual port header
<b>Flash ROM</b>	Yes	
<b>CPU Fan Header</b>	Yes	
<b>Fan Headers</b>	Yes	
<b>Front Control Panel/Speaker Header</b>	Yes	
<b>CMOS Battery Holder - Lithium</b>	Yes	
<b>Integrated Trusted Platform Module</b>	Integrated TPM 2.0. Convertible to FIPS 140-2 Certified Mode through firmware v15.22. The TPM module is disabled where restricted by law.	
<b>Power Supply Headers</b>	Yes	
<b>Power Switch, Power LED &amp; Hard Drive LED Header</b>	Yes	
<b>Clear Password Jumper</b>	Yes	
<b>Keyboard/Mouse</b>	USB	

<sup>1</sup>Maximum memory capacities assume 64-bit operating systems, such as Genuine Windows® 11 Professional 64 bit, Red Hat Linux 64-bit.

<sup>2</sup>M.2 storage supports compatible devices up to 80mm



### System Technical Specifications

System Configurations							
<b>Z4 Rack G5 Example Configuration #1</b>	<b>Processor Info</b>	Intel Xeon W3-2423 6C 4GHz					
	<b>Memory Info</b>	1x16GB DDR5 4800 (Registered DIMM)					
	<b>Graphics Info</b>	NVIDIA T400 4GB					
	<b>Disks/Optical/Floppy</b>	1x ZTurbo 512 GB TLC SSD					
	<b>PSU</b>	1x 675W					
	<b>Other</b>	N/A					
<b>Energy Consumption (Watts)</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	67.225	66.464	67.534	66.684	67.223	66.461
	Windows Busy Typ (S0)	163.043		160.88		163.036	
	Windows Busy Max (S0)	179.889		173.248		179.882	
	Sleep (S3)	3.658	3.547	3.662	3.549	3.654	3.542
	Off (S5)	2.294	2.282	2.296	2.284	2.292	2.281
	Zero Power Mode (EuP)	0.29		0.292		0.289	
	<b>Heat Dissipation (Btu/hr)</b>		115 VAC		230 VAC		100 VAC
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)		229.371	226.775	230.426	227.528	229.365	226.764
Windows Busy Typ (S0)		556.302		548.923		556.278	
Windows Busy Max (S0)		1613.781		291.122		613.757	
Sleep (S3)		12.481	12.102	12.494	12.109	12.467	12.085
Off (S5)		7.827	7.786	7.833	7.793	7.82	7.782
Zero Power Mode (EuP)		0.989		0.996		0.986	
<b>Z4 Rack G5 Example Configuration #2</b>		<b>Processor Info</b>	Intel Xeon W5-2445 10C 4.3GHz				
	<b>Memory Info</b>	2x16GB DDR5 4800 (Registered DIMM)					
	<b>Graphics Info</b>	NVIDIA A2000 12GB					
	<b>Disks/Optical/Floppy</b>	1x ZTurbo 512 GB TLC SSD; 1x 1TB 7200 SATA Enterprise 3.5" HDD					
	<b>PSU</b>	1x 675W					
	<b>Other</b>	N/A					
<b>Energy Consumption (Watts)</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	73.476	72.395	73.668	72.597	73.473	72.389
	Windows Busy Typ (S0)	304.743		299.685		303.156	
	Windows Busy Max (S0)	322.705		314.841		321.876	
	Sleep (S3)	3.718	3.509	3.723	3.515	3.716	3.505
	Off (S5)	2.256	2.252	2.261	2.254	2.254	2.251
	Zero Power Mode (EuP)	0.293		0.294		0.292	
<b>Heat Dissipation (Btu/hr)</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled

### System Technical Specifications

	Windows Idle (S0)	250.700	247.012	251.355	247.701	250.689	246.991
	Windows Busy Typ (S0)	1039.783		1022.525		1034.368	
	Windows Busy Max (S0)	1101.069		1074.237		1098.241	
	Sleep (S3)	12.685	11.972	12.702	11.993	12.678	11.959
	Off (S5)	7.697	7.683	7.714	7.690	7.690	7.680
	Zero Power Mode (EuP)	0.999		1.003		0.996	

<b>Z4 Rack G5 Example Configuration #3</b>	<b>Processor Info</b>	Intel Xeon W5-2555X 12C 4.4GHz					
	<b>Memory Info</b>	2x32GB DDR5 4800 (Registered DIMM)					
	<b>Graphics Info</b>	NVIDIA A4000 16GB					
	<b>Disks/Optical/Floppy</b>	1x ZTurbo 2TB TLC SSD; 1x 4TB 7200 SATA Enterprise 3.5" HDD					
	<b>PSU</b>	2x 675W					
	<b>Other</b>	N/A					

<b>Energy Consumption (Watts)</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	83.416	81.931	83.647	82.004	83.412	81.928
	Windows Busy Typ (S0)	402.7		394.72		401.24	
	Windows Busy Max (S0)	454.3		424.337		452.64	
	Sleep (S3)	4.827	4.653	4.833	4.658	4.824	4.649
	Off (S5)	2.695	2.688	2.704	2.691	2.691	2.686
	Zero Power Mode (EuP)	0.561		0.564		0.560	

<b>Heat Dissipation (Btu/hr)</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	284.615	279.648	285.403	279.797	284.601	279.538
	Windows Busy Typ (S0)	1374.012		1346.785		1369.031	
	Windows Busy Max (S0)	1550.072		1447.838		1544.408	
	Sleep (S3)	16.469	15.876	16.490	15.893	16.459	16.469
	Off (S5)	9.195	9.171	9.226	9.182	9.181	9.195
	Zero Power Mode (EuP)	1.914		1.924		1.910	

<b>Z4 Rack G5 Example Configuration #4</b>	<b>Processor Info</b>	Intel Xeon W7-2495X 24C 4.6GHz						TBD
	<b>Memory Info</b>	4x16GB DDR5 4800 (Registered DIMM)						TBD
	<b>Graphics Info</b>	NVIDIA A6000 48G						TBD
	<b>Disks/Optical/Floppy</b>	2x ZTurbo 2TB TLC SSD; 1x 8TB 7200 SATA Enterprise 3.5" HDD						TBD
	<b>PSU</b>	2x 675W						TBD
	<b>Other</b>	N/A						TBD

<b>Energy Consumption (Watts)</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	103.967	100.076	104.268	100.384	103.960	100.058
	Windows Busy Typ (S0)	627.703		610.67		626.938	
	Windows Busy Max (S0)	594.57		577.2		593.86	
Sleep (S3)	4.855	4.766	4.864	4.771	4.853	4.762	

### System Technical Specifications

	Off (S5)	2.717	2.706	2.722	2.708	2.716	2.704
	Zero Power Mode (EuP)	0.564		0.567		0.563	

Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	354.735	341.459	355.762	342.510	354.711	341.397
	Windows Busy Typ (S0)	2141.723		2083.606		2139.112	
	Windows Busy Max (S0)	2028.673		1969.406		2026.25	
	Sleep (S3)	16.562	16.261	16.595	16.278	16.558	16.247
	Off (S5)	9.270	9.232	9.287	9.239	9.266	9.226
	Zero Power Mode (EuP)	1.924		1.934		1.920	

**NOTE:** The numbers in this table are from actual measurements on a single system. There will be some variation from unit to unit.

**NOTE:** The busy power number and associated BTU/hr number for each configuration will be a strong function of the actual application software run on the system. There can be a great deal of variation in this number.

**NOTE:** The Power Supply Efficiency report may be found at the following links:  
<https://www.plugloadsolutions.com/80PlusPowerSuppliesDetail.aspx?id=0&type=2>

- Operating Voltage Range** 90-269 VAC
- Rated Voltage Range** 100-240 VAC
- Rated Line Frequency** 50-60 Hz
- Operating Line Frequency Range** 47-66 Hz
- ENERGY STAR® certified** Yes  
(Config Dependent)
- CECP Compliant @ 220V** Yes
- FEMP Standby Power Compliant** Yes, with Wake-on-LAN disabled: <1W in S5 - Power Off
- Built-in Self-Test (BIST) LED** Yes
- Surge Tolerant Full Ranging Power Supply** Yes  
(withstands power surges up to 2000V)
- Hood Lock Header** Yes
- ErP Lot 6- Tier 1 Compliance @ 230V** Yes  
(<1W in S5 - Power Off)
- ErP Lot 6- Tier 2 Compliance @ 230V** Yes  
(<0.5W in S5 - Power Off)

Declared Noise Emissions		
System Configuration (Entry level)	Processor Info	Intel Xeon W3-2423 6C 4GHz
	Memory Info	1x16GB DDR5 4800 (Registered DIMM)
	Graphics Info	NVIDIA T400 4GB

### System Technical Specifications

	<b>Disks/Optical</b>	1x ZTurbo 512 GB TLC SSD	
	<b>Power Supply</b>	1x 675W	
<b>Declared Noise Emissions</b> (in accordance with ISO 7779 and ISO 9296)		<b>Sound Power</b> (LWAd, bels)	<b>Deskside Sound Pressure</b> (LpAm, decibels)
	<b>Idle</b>	TBD	TBD
	<b>Hard drive Operating</b> (random reads)	TBD	TBD

**NOTE:** Higher noise levels may be experienced with non-HP approved graphic card(s). Some consumer graphics cards have side blowing fans that may heat up thermal sensor(s) on the mother board causing fans to ramp.

### System Technical Specifications

#### ENVIRONMENTAL DATA

<b>Environmental Requirements</b>	<b>Temperature</b>	<p>Operating: 5° to 40°C (40° to 104°F)<sup>1</sup>                      Non-operating: -40° to 60°C (-40° to 140°F)  <sup>1</sup>40°C has been validated for (add configuration information)                      Above 1524 m (5,000 feet) altitude, the maximum operating temperature is reduced by 1° C (1.8° F) for every 305 m (1,000 feet) increase in elevation                      Maximum rate of change: 10 °C/hr                      No direct sustained sunlight</p>
	<b>Humidity</b>	<p>Operating: 8% to 85% relative humidity, non-condensing, 35° C maximum wet bulb                      Non-operating: 8% to 90% relative humidity, non-condensing, 35° C maximum wet bulb</p>
	<b>Maximum Altitude</b>	<p>Operating (with Rotational Hard Drives): 3,048 m (10,000 feet)                      Operating (with only Solid-State Drives): 5,000 m (16,404 feet)                      Non-operating: 12,192 m (40,000 feet)                      Maximum operating temperature is reduced as altitude increases. See Temperature for details.</p>
	<b>Shock (non-repetitive)</b>	<p>Operating: ½-sine: 40g, 2-3ms (~62 cm/sec)                      Non-operating: ½-sine: 160 cm/s, 2-3ms (~105g)                      square: 422 cm/s, 20g</p>
	<b>Vibration</b>	<p>Operating random: 0.5g (rms), 5-300 Hz, up to 0.0025g<sup>2</sup>/Hz                      Non-operating random: 2.0g (rms), 5-500 Hz, up to 0.0150 g<sup>2</sup>/Hz  <b>NOTE:</b> Values do not indicate continuous vibration.</p>

#### Physical Security and Serviceability

<b>Access Panel</b>	Tool-less Includes system board and memory information.
<b>Hard Drive</b>	Screw-mounted
<b>Expansion Cards</b>	Expansion card cage removal/insertion into system is tool-less Expansion card access requires removal of screw-mounted retainer bracket
<b>Processor Socket</b>	Tool-less
<b>Blue User Touch Points</b>	Yes, on primary serviceable components.
<b>Color-coordinated Cables and Connectors</b>	Yes
<b>Memory DIMM Connectors</b>	Tool-less
<b>System Board</b>	Screw-mounted
<b>Dual Color Power/Failure LED</b>	Yes
<b>HDD Activity LED</b>	Yes <b>NOTE:</b> HDD Activity LED is not dual color
<b>Configuration Record SW</b>	Yes
<b>Over-Temp Warning on Screen</b>	Yes, at POST screen on reboot
<b>Dual Function Front Power Switch</b>	Yes, causes a fail-safe power off when held for 4 seconds
<b>Padlock Support</b>	Yes (optional): Locks top cover and secures chassis from theft 7.0 mm (0.2756 in) diameter padlock loop at rear of system
<b>Cable Lock Support</b>	Yes, Kensington Cable Lock (optional): Secures chassis from theft

### System Technical Specifications

	3 mm x 7 mm slot at rear of system
<b>Universal Chassis Clamp Lock Support</b>	No
<b>Chassis Interlock Sensor</b>	Yes Sensor detects when the access panel has been removed. The access panel must be installed for the system to power ON.
<b>Serial, USB, Audio, Network, Enable/Disable Port Control</b>	Yes, enables or disables serial, USB, audio, and network ports
<b>Removable Media Write/Boot Control</b>	Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media)
<b>Power-On Password Setup Password</b>	Yes, prevents an unauthorized person from booting up the workstation Yes, prevents an unauthorized person from changing the workstation configuration
<b>3.3V Aux Power LED on System PCA</b>	Yes
<b>NIC LEDs (integrated) (Green &amp; Amber)</b>	Yes
<b>CPUs and Heatsinks</b>	A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less
<b>Power Supply Diagnostic LED</b>	Yes Solid Green (OK); Blinking Green (Standby); Red (Fault); Off (No AC Power/PSU Failure)
<b>Front Power Button</b>	Yes, ACPI multi-function
<b>Rear Power Button</b>	Yes
<b>System Locator LED</b>	Yes, blue
<b>Front Power LED</b>	Yes, white (normal), red (fault)
<b>Front Hard Drive Activity LED</b>	Yes, white
<b>Internal Speaker</b>	Yes
<b>System/Emergency ROM Flash Recovery</b>	Recovers corrupted system BIOS.
<b>Cooling Solutions</b>	Air cooled forced convection heatsinks
<b>Power Supply Fan</b>	40 mm x 40 mm x 28 mm (non-serviceable)
<b>Chassis Fans</b>	40 mm x 40 mm x 56 mm (serviceable)
<b>HP PC Hardware Diagnostics UEFI</b>	HP PC Hardware Diagnostics (UEFI) enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing ESC then F2 upon the PC reboot and is available as a download from HP Support.
<b>Access Panel Key Lock</b>	No
<b>ACPI-Ready Hardware</b>	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> <li>• Allows the system to wake from a low-power mode.</li> <li>• Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system</li> </ul>
<b>Trusted Platform Module Chip</b>	TPM Specification Version 2.0 (Infineon SLB 9672). Common Criteria EAL4+ certified. FIPS 140-2 Certification TCG TPM Certified products list: <a href="http://www.trustedcomputinggroup.org/certification/tpm-certified-products/">http://www.trustedcomputinggroup.org/certification/tpm-certified-products/</a>
<b>Integrated Chassis Handles</b>	No
<b>Power Supply</b>	Tool-less

### System Technical Specifications

<b>PCIe Card Retention</b>	Yes, rear (all), middle (all), front (full-length cards with extender)
<b>Flash ROM</b>	Yes
<b>Diagnostic Power Switch</b>	Yes
<b>LED on board</b>	
<b>Clear Password Jumper</b>	Yes
<b>Clear CMOS Button</b>	Yes
<b>CMOS Battery Holder</b>	Yes
<b>DIMM Connectors</b>	Yes

### Service, Support, and Warranty

On-site Warranty and Service<sup>1</sup>: Three-years, limited warranty and service offering delivers on-site, next business-day<sup>2</sup> service for parts and labor and includes free telephone support<sup>3</sup> 8am - 5pm. Global coverage<sup>2</sup> ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering. 24/7 operation will not void the HP warranty. Storage devices are not covered under warranty for 24/7 operation except for Enterprise class HDDs.

**NOTE 1:** Terms and conditions may vary by country. Certain restrictions and exclusions apply.

**NOTE 2:** On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

**NOTE 3:** Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries.

HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at:

<http://www.hp.com/go/lookuptool>. Service levels and response times for HP Care Packs may vary depending on your geographic location.

### Certification and Compliance

Environmental Sustainability questions concerning:

- Ecolabels (EPEAT, TCO, etc.)
- ENERGY STAR, California Energy Commission (CEC)
- Compliance with Environmental legislation (EU ErP, China CECP, EU RoHS and other countries)
- Supply Chain Social Environmental Responsibility (SER) (conflict minerals; human rights, etc.)
- Product specific environmental features (material content, packaging content, recycled content, etc.)
- China Energy Label (CEL)

Please contact [sustainability@hp.com](mailto:sustainability@hp.com)

For country specific Regulatory Compliance approval documents or Regulatory and Safety questions concerning:

- Declarations of Conformity (for self-service, go to [https://www.hp.com/uk-en/certifications/technical/regulations-certificates.html?jumpid=ex\\_r135\\_uk/en/any/corp/hpuk-mu\\_chev/certificates](https://www.hp.com/uk-en/certifications/technical/regulations-certificates.html?jumpid=ex_r135_uk/en/any/corp/hpuk-mu_chev/certificates))
- GS Certificates
- Product Safety Certificates (UL, CB, BIS, etc.)
- EMC Certificates, Declarations of Conformity, or Certificates of Conformity (CE, FCC, ICES, etc.)
- CCC Certificates
- Ergonomics
- 

Please contact [techregshelp@hp.com](mailto:techregshelp@hp.com)

### System Technical Specifications

<b>BIOS</b>	
<b>PCIe 5.0 Support</b>	Full BIOS support for PCI Express through industry standard interfaces. Supported speeds and slot information vary.
<b>ATA/ATAPI WMI Support</b>	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
<b>BIOS Power On ROM Based Computer Setup Utility (F10)</b>	Users can define a specific date and time for the system to power on. Review and customize system configuration settings controlled by the BIOS.
<b>System/Emergency ROM Flash Recovery with Video Replicated Setup</b>	Recovers system BIOS in corrupted Flash ROM. Saves BIOS settings to USB flash device in human readable file (HpSetup.txt). BiosConfigurationUtility.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).
<b>SMBIOS Boot Control</b>	System Management BIOS Reference Specification, Version 3.2 Disables the ability to boot from removable media on supported devices.
<b>Memory Change Alert Thermal Alert</b>	Alerts management console if memory is removed or changed. Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> <li>• NORMAL - normal temperature ranges.</li> <li>• ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown.</li> <li>• SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs.</li> </ul>
<b>Remote ROM Flash ACPI (Advanced Configuration and Power Management Interface)</b>	Provides secure, fail-safe ROM image management from a central network console. Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 6.0 for full compatibility with 64-bit operating systems.
<b>Ownership Tag Remote Wakeup/Remote Shutdown</b>	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen. System administrators can power on, restart, and power off a client computer from a remote location.
<b>Instantly Available PC (Suspend to RAM - ACPI sleep state S3)</b>	Allows for very low power consumption with quick resume time.
<b>Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)</b>	Allows a new or existing system to boot over the network and download software, including the operating system.
<b>ROM revision levels</b>	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS and WMI) so that management SW applications can use and report this information.
<b>System board revision level</b>	Allows management SW to read revision level of the system board. Revision level is digitally encoded into the HW and cannot be modified.
<b>Start-up Diagnostics (Power-on Self-Test)</b>	Assesses system health at boot time with selectable levels of testing.
<b>Auto Setup when new hardware installed</b>	System automatically detects addition of new hardware.
<b>Keyboard-less Operation</b>	The system can be booted without a keyboard.



### System Technical Specifications

<b>Localized ROM Setup</b>	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 15 languages with local keyboard mappings.
<b>Asset Tag</b>	The user or MIS to set a unique tag string in non-volatile memory.
<b>Per-slot Control</b>	Allows I/O slot parameters (option ROM enable/disable, bifurcation, speed) to be configured individually.
<b>Adaptive Cooling</b>	Control parameters are set according to detected hardware configuration for optimal acoustics.
<b>Pre-boot Diagnostics</b>	(Pre-video) critical errors are reported via beeps and blinks on the power LED.
<b>UEFI Specification Revision</b>	2.7
<b>ACPI</b>	Advanced Configuration and Power Management Interface, Version 6.0
<b>PCI Express</b>	PCI Express Base Specification, Revision 2.0 PCI Express Base Specification, Revision 3.0 PCI Express Base Specification, Revision 4.0 PCI Express Base Specification, Revision 5.0
<b>SATA</b>	Serial ATA Specification, Revision 1.0a Serial ATA 3 Gb/s: Serial ATA Specification, Revision 2.5 Serial ATA 6 Gb/s: Serial ATA Specification, Revision 3.0
<b>SPD</b>	JEDEC JESD300-5
<b>TPM</b>	Trusted Computing Group TPM Specification Version 2.0 (Infineon SLB 9672). Common Criteria EAL4+ certified. FIPS 140-2 Certification TCG TPM Certified products list: <a href="http://www.trustedcomputinggroup.org/certification/tpm-certified-products/">http://www.trustedcomputinggroup.org/certification/tpm-certified-products/</a>
<b>USB</b>	Universal Serial Bus Revision 1.1 Specification Universal Serial Bus Revision 2.0 Specification Universal Serial Bus Revision 3.1 Specification Universal Serial Bus Revision 3.2 Specification USB Battery Charging specification, Revision 1.2 USB Power Delivery specification Revision 3.0
<b>SMBIOS</b>	System Management BIOS Reference Specification, Version 3.2

### System Technical Specifications

#### Social and Environmental Responsibility

**Eco-Label Certifications & Declarations** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- US Federal Energy Management Program (FEMP)
- EPEAT<sup>®</sup> Gold registered in the United States. See <http://www.epeat.net> for registration status in your country.
- China Energy Conservation Program (CECP)
- China State Environmental Protection Administration (SEPA)
- Taiwan Green Mark
- Korea Eco-label
- Japan PC Green label\*

#### Sustainable Impact Specifications

- [Product Carbon Footprint \(hp.com\)](#)
- 25% post-consumer recycled plastic
- 10% recycled metal
- Low halogen
- Outside Box and corrugated cushions are 100% sustainably sourced and recyclable
- Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable
- Recycled Plastic cushions

**System Configuration** The configuration used for the Energy Consumption and Declared Noise Emissions data for the Workstation model is based on a “Typically Configured Workstation”.

#### Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	113.1 W	115.3 W	N/A
Normal Operation (Long idle)	109.1 W	110.1 W	N/A
Sleep	8.3 W	8.4 W	N/A
Off	2.8 W	2.9 W	N/A

**NOTE:**

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family . HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

#### Heat Dissipation\*

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	386.80 BTU/hr	394.33 BTU/hr	N/A
Normal Operation (Long idle)	373.12 BTU/hr	376.54 BTU/hr	N/A
Sleep	28.39 BTU/hr	28.73 BTU/hr	N/A
Off	9.58 BTU/hr	9.92 BTU/hr	N/A

**\*NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

### System Technical Specifications

#### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (L <sub>WA</sub> , bels)	Sound Pressure (L <sub>pAm</sub> , decibels)
Typically Configured – Idle	5.1	36
Drive Random Seek	5.1	36
Active Mode	6.1	46

#### Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years.

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

#### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see [www.epeat.net](http://www.epeat.net)
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product is 91.9% recycle-able when properly disposed of at end of life.

#### Packaging Materials

<b>External:</b>	PAPER/Corrugated	3984 g
<b>Internal:</b>	PLASTIC/EPE (Expanded Polyethylene)	440 g
	PLASTIC/Polyethylene low density	52 g
	PAPER/Molded Pulp	1694 g

The plastic packaging material contains at least 0.0% recycled content.

The corrugated paper packaging materials contains at least 35.0% recycled content.

#### RoHS Compliance

HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam.

We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products.

We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve.

To obtain a copy of the HP RoHS Compliance Statement, see [HP RoHS position statement](#).

### System Technical Specifications

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at [http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Bis(2-Ethylhexyl) phthalate (DEHP)
- Benzyl butyl phthalate (BBP)
- Dibutyl phthalate (DBP)
- Diisobutyl phthalate (DIBP)
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

#### Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### End-of-life Management and Recycling

HP offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These

### System Technical Specifications

instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### HP, Inc. Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842>

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

#### Footnotes

- Percentage of ocean-bound plastic contained in each component varies by product
- Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.
- External power supplies, WWAN modules, power cords, cables and peripherals excluded.
- 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.
- Fiber cushions made from 100% recycled wood fiber and organic materials.
- Plastic cushions are made from >90% recycled plastic.
- Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for metal parts over 25 grams

### System Technical Specifications

---

#### Manageability

##### Industry Standard Specifications

This product meets the following industry standard specifications for manageability functionality:

- DASH 1.2 (via Intel® LAN on motherboard)

##### Intel® Active Management Technology (AMT)

Intel® Active Management Technology (AMT) 16.10

An advanced set of remote management features and functionality providing IT administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 16.10 includes the following advanced management functions:

- Power Management (on, off, reset, graceful shutdown, sleep and hibernate)
  - Support in Max Power Savings (Shutdown and Hibernate Modes)
- Hardware Inventory (includes BIOS and firmware revisions)
- Hardware Alerting
- Agent Presence
- System Defense Filters
- Serial Over LAN (SOL)
- USB Redirect (Media Redirection)
- ME Wake-on-LAN (WOL), even with Maximum Power Savings Enabled
- DASH 1.2 compliance
- IPv6 Support
- Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection
- Remote Scheduled Maintenance - pre-schedule when the system connects to the IT or service provider console for maintenance.
- Remote Alerts - automatically alert IT or service provider if issues arise
- Access Monitor - Provides oversight into Intel® AMT actions to support security requirements
- PC Alarm Clock
- Microsoft NAP Support
- Host Base set-up and configuration
- Management Engine (ME) firmware roll back
- Local Time Sync to UTC
- Remote Memory Dump Command – Creates memory dump for debug

##### Intel® vPro® Technology HP Anyware Remote System Controller

Yes, when configured with an Intel® vPro® supporting processor.

This product is fully compatible with the HP Anyware Remote System Controller. It can be configured CTO or added as an aftermarket option.

---

### Stable & Consistent Offerings

#### Stable & Consistent Offerings

**Global Series SKUs**

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware and software designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section.

**Stable & Consistent Offerings**

HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers-no special programs, no additional cost-no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

**Processors****Product #****Offering**

709P2AV

Intel Xeon W3-2423

709P4AV

Intel Xeon W3-2435

**Storage****Product #****Offering**

708L4AV

Z Turbo 1TB PCIe-4x4 2280 TLC M.2 Solid State Drive

708F8AV

1TB 7200RPM SATA 3.5in Enterprise

### Technical Specifications – Storage Drives

#### STORAGE/HARD DRIVES

<b>Performance PCIe SSDs for HP Workstations</b>	<b>Z Turbo 512GB 2280 PCIe-4x4 TLC SSD</b>	<b>Capacity</b>	512GB
		<b>Protocol</b>	PCIe
		<b>Form Factor</b>	M.2
		<b>Controller</b>	NVMe
		<b>NAND Type</b>	3D TLC
		<b>Endurance</b>	300TBW (TB Written)
		<b>Reliability</b>	1.5M hours
		<b>Rated for 24/7/365 operation</b>	No
		<b>Interface</b>	PCI Express 4.0 x4 electrical
		<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
		<b>Performance</b>	<b>Sequential Read</b> up to 6400MB/s*
			<b>Sequential Write</b> up to 3400MB/s*
			<b>Random Read</b> up to 600K IOPS*
	<b>Random Write</b> up to 600K IOPS*		

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 512GB 2280 PCIe-4x4 SED OPAL2 TLC M.2 SSD</b>	<b>Capacity</b>	512GB
	<b>Protocol</b>	PCIe
	<b>Form Factor</b>	M.2
	<b>Controller</b>	NVMe
	<b>NAND Type</b>	3D TLC
	<b>Endurance</b>	300TBW (TB Written)
	<b>Reliability</b>	1.5M hours
	<b>Rated for 24/7/365 operation</b>	No
	<b>Interface</b>	PCI Express 4.0 x4 electrical
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
	<b>Performance</b>	<b>Sequential Read</b> up to 6400MB/s*
		<b>Sequential Write</b> up to 3400MB/s*
		<b>Random Read</b> up to 600K IOPS*
	<b>Random Write</b> up to 600K IOPS*	
<b>Self-Encrypting Drive Support</b>	OPAL 2	

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 1TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 SSD Module</b>	<b>Capacity</b>	1TB
	<b>Protocol</b>	PCIe
	<b>Form Factor</b>	M.2
	<b>Controller</b>	NVMe
	<b>NAND Type</b>	3D TLC
	<b>Endurance</b>	400TBW (TB Written)
	<b>Reliability</b>	1.5M hours



### Technical Specifications – Storage Drives

<b>Rated for 24/7/365 operation</b>	No								
<b>Interface</b>	PCI Express 4.0 x4 electrical								
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)								
<b>Performance</b>	<table> <tr> <td><b>Sequential Read</b></td> <td>up to 6500MB/s*</td> </tr> <tr> <td><b>Sequential Write</b></td> <td>up to 5000MB/s*</td> </tr> <tr> <td><b>Random Read</b></td> <td>up to 800K IOPS*</td> </tr> <tr> <td><b>Random Write</b></td> <td>up to 800K IOPS*</td> </tr> </table>	<b>Sequential Read</b>	up to 6500MB/s*	<b>Sequential Write</b>	up to 5000MB/s*	<b>Random Read</b>	up to 800K IOPS*	<b>Random Write</b>	up to 800K IOPS*
<b>Sequential Read</b>	up to 6500MB/s*								
<b>Sequential Write</b>	up to 5000MB/s*								
<b>Random Read</b>	up to 800K IOPS*								
<b>Random Write</b>	up to 800K IOPS*								
<b>Self-Encrypting Drive Support</b>	OPAL 2								

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 1TB 2280 PCIe-4x4 TLC SSD</b>	<b>Capacity</b>	1TB								
	<b>Protocol</b>	PCIe								
	<b>Form Factor</b>	M.2								
	<b>Controller</b>	NVMe								
	<b>NAND Type</b>	3D TLC								
	<b>Endurance</b>	400TBW (TB Written)								
	<b>Reliability</b>	1.5M hours								
	<b>Rated for 24/7/365 operation</b>	No								
	<b>Interface</b>	PCI Express 4.0 x4 electrical								
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)								
	<b>Performance</b>	<table> <tr> <td><b>Sequential Read</b></td> <td>up to 6500MB/s*</td> </tr> <tr> <td><b>Sequential Write</b></td> <td>up to 5000MB/s*</td> </tr> <tr> <td><b>Random Read</b></td> <td>up to 800K IOPS*</td> </tr> <tr> <td><b>Random Write</b></td> <td>up to 800K IOPS*</td> </tr> </table>	<b>Sequential Read</b>	up to 6500MB/s*	<b>Sequential Write</b>	up to 5000MB/s*	<b>Random Read</b>	up to 800K IOPS*	<b>Random Write</b>	up to 800K IOPS*
	<b>Sequential Read</b>	up to 6500MB/s*								
	<b>Sequential Write</b>	up to 5000MB/s*								
<b>Random Read</b>	up to 800K IOPS*									
<b>Random Write</b>	up to 800K IOPS*									

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 1TB 2280 PCIe-4x4 TLC SSD</b>	<b>Capacity</b>	1TB								
	<b>Protocol</b>	PCIe								
	<b>Form Factor</b>	M.2								
	<b>Controller</b>	NVMe								
	<b>NAND Type</b>	3D TLC								
	<b>Endurance</b>	400TBW (TB Written)								
	<b>Reliability</b>	1.5M hours								
	<b>Rated for 24/7/365 operation</b>	No								
	<b>Interface</b>	PCI Express 4.0 x4 electrical								
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)								
	<b>Performance</b>	<table> <tr> <td><b>Sequential Read</b></td> <td>up to 6500MB/s*</td> </tr> <tr> <td><b>Sequential Write</b></td> <td>up to 5000MB/s*</td> </tr> <tr> <td><b>Random Read</b></td> <td>up to 800K IOPS*</td> </tr> <tr> <td><b>Random Write</b></td> <td>up to 800K IOPS*</td> </tr> </table>	<b>Sequential Read</b>	up to 6500MB/s*	<b>Sequential Write</b>	up to 5000MB/s*	<b>Random Read</b>	up to 800K IOPS*	<b>Random Write</b>	up to 800K IOPS*
	<b>Sequential Read</b>	up to 6500MB/s*								
	<b>Sequential Write</b>	up to 5000MB/s*								
<b>Random Read</b>	up to 800K IOPS*									
<b>Random Write</b>	up to 800K IOPS*									

### Technical Specifications – Storage Drives

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 2TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 SSD</b>	<b>Capacity</b>	2TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	500TBW (TB Written)	
	<b>Reliability</b>	1.5M hours	
	<b>Rated for 24/7/365 operation</b>	No	
	<b>Interface</b>	PCI Express 4.0 x4 electrical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	up to 6500MB/s*
		<b>Sequential Write</b>	up to 5000MB/s*
		<b>Random Read</b>	up to 800K IOPS*
<b>Random Write</b>		up to 800K IOPS*	
<b>Self-Encrypting Drive Support</b>	OPAL 2		

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 2TB 2280 PCIe-4x4 TLC SSD</b>	<b>Capacity</b>	2TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	500TBW (TB Written)	
	<b>Reliability</b>	1.5M hours	
	<b>Rated for 24/7/365 operation</b>	No	
	<b>Interface</b>	PCI Express 4.0 x4 electrical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	up to 6500MB/s*
		<b>Sequential Write</b>	up to 5000MB/s*
		<b>Random Read</b>	up to 800K IOPS*
<b>Random Write</b>		up to 800K IOPS*	

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 4TB 2280 PCIe-4x4 TLC M.2 SSD</b>	<b>Capacity</b>	4TB
	<b>Protocol</b>	PCIe
	<b>Form Factor</b>	M.2
	<b>Controller</b>	NVMe
	<b>NAND Type</b>	3D TLC

### Technical Specifications – Storage Drives

<b>Endurance</b>	600TBW (TB Written)
<b>Reliability</b>	1.5M hours
<b>Rated for 24/7/365 operation</b>	No
<b>Interface</b>	PCI Express 4.0 x4 electrical
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
<b>Performance</b>	<b>Sequential Read</b> up to 6500MB/s*
	<b>Sequential Write</b> up to 5000MB/s*
	<b>Random Read</b> up to 700K IOPS*
	<b>Random Write</b> up to 700K IOPS*

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

#### Z Turbo 4TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 SSD

<b>Capacity</b>	4TB
<b>Protocol</b>	PCIe
<b>Form Factor</b>	M.2
<b>Controller</b>	NVMe
<b>NAND Type</b>	3D TLC
<b>Endurance</b>	600TBW (TB Written)
<b>Reliability</b>	1.5M hours
<b>Rated for 24/7/365 operation</b>	No
<b>Interface</b>	PCI Express 4.0 x4 electrical
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
<b>Performance</b>	<b>Sequential Read</b> up to 6500MB/s*
	<b>Sequential Write</b> up to 5000MB/s*
	<b>Random Read</b> up to 700K IOPS*
	<b>Random Write</b> up to 700K IOPS*
<b>Self-Encrypting Drive Support</b>	OPAL 2

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

#### Z Turbo 512GB PCIe-4x4 TLC Z4/Z6 Kit SSD

<b>Capacity</b>	512GB
<b>Protocol</b>	PCIe
<b>Form Factor</b>	M.2
<b>Controller</b>	NVMe
<b>NAND Type</b>	3D TLC
<b>Endurance</b>	300TBW (TB Written)
<b>Reliability</b>	1.5M hours
<b>Rated for 24/7/365 operation</b>	No
<b>Interface</b>	PCI Express 4.0 x4 electrical
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)

### Technical Specifications – Storage Drives

<b>Performance</b>	<b>Sequential Read</b>	up to 6400MB/s*
	<b>Sequential Write</b>	up to 3400MB/s*
	<b>Random Read</b>	up to 600K IOPS*
	<b>Random Write</b>	up to 600K IOPS*

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 512GB 2280 PCIe-4x4 SED OPAL2 TLC M.2 Z4/Z6 Kit SSD</b>	<b>Capacity</b>	512GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability</b>	1.5M hours	
	<b>Rated for 24/7/365 operation</b>	No	
	<b>Interface</b>	PCI Express 4.0 x4 electrical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	up to 6400MB/s*
		<b>Sequential Write</b>	up to 3400MB/s*
		<b>Random Read</b>	up to 600K IOPS*
	<b>Random Write</b>	up to 600K IOPS*	
<b>Self-Encrypting Drive Support</b>	OPAL 2		

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 1TB PCIe-4x4 TLC Z4/Z6 Kit SSD</b>	<b>Capacity</b>	1TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	400TBW (TB Written)	
	<b>Reliability</b>	1.5M hours	
	<b>Rated for 24/7/365 operation</b>	No	
	<b>Interface</b>	PCI Express 4.0 x4 electrical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	up to 6500MB/s*
		<b>Sequential Write</b>	up to 5000MB/s*
		<b>Random Read</b>	up to 800K IOPS*
	<b>Random Write</b>	up to 800K IOPS*	

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Capacity</b>	1TB
-----------------	-----

### Technical Specifications – Storage Drives

<b>Z Turbo 1TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 Z4/Z6 Kit SSD</b>	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	400TBW (TB Written)	
	<b>Reliability</b>	1.5M hours	
	<b>Rated for 24/7/365 operation</b>	No	
	<b>Interface</b>	PCI Express 4.0 x4 electrical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	up to 6500MB/s*
		<b>Sequential Write</b>	up to 5000MB/s*
		<b>Random Read</b>	up to 800K IOPS*
		<b>Random Write</b>	up to 800K IOPS*
<b>Self-Encrypting Drive Support</b>	OPAL 2		

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 2TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 Z4/Z6 Kit SSD</b>	<b>Capacity</b>	2TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	500TBW (TB Written)	
	<b>Reliability</b>	1.5M hours	
	<b>Rated for 24/7/365 operation</b>	No	
	<b>Interface</b>	PCI Express 4.0 x4 electrical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	up to 6500MB/s*
		<b>Sequential Write</b>	up to 5000MB/s*
		<b>Random Read</b>	up to 800K IOPS*
<b>Random Write</b>		up to 800K IOPS*	
<b>Self-Encrypting Drive Support</b>	OPAL 2		

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>Z Turbo 4TB 2280 PCIe-4x4 SED OPAL2 TLC M.2 Z4/Z6 Kit SSD</b>	<b>Capacity</b>	4TB
	<b>Protocol</b>	PCIe
	<b>Form Factor</b>	M.2
	<b>Controller</b>	NVMe
	<b>NAND Type</b>	3D TLC
	<b>Endurance</b>	600TBW (TB Written)
	<b>Reliability</b>	1.5M hours

### Technical Specifications – Storage Drives

<b>Rated for 24/7/365 operation</b>	No								
<b>Interface</b>	PCI Express 4.0 x4 electrical								
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)								
<b>Performance</b>	<table> <tr> <td><b>Sequential Read</b></td> <td>up to 6500MB/s*</td> </tr> <tr> <td><b>Sequential Write</b></td> <td>up to 5000MB/s*</td> </tr> <tr> <td><b>Random Read</b></td> <td>up to 700K IOPS*</td> </tr> <tr> <td><b>Random Write</b></td> <td>up to 700K IOPS*</td> </tr> </table>	<b>Sequential Read</b>	up to 6500MB/s*	<b>Sequential Write</b>	up to 5000MB/s*	<b>Random Read</b>	up to 700K IOPS*	<b>Random Write</b>	up to 700K IOPS*
<b>Sequential Read</b>	up to 6500MB/s*								
<b>Sequential Write</b>	up to 5000MB/s*								
<b>Random Read</b>	up to 700K IOPS*								
<b>Random Write</b>	up to 700K IOPS*								
<b>Self-Encrypting Drive Support</b>	OPAL 2								

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>SATA Hard Drives for HP Workstations</b>	<b>1TB 7200RPM SATA 3.5in Enterprise HDD</b>	<b>Capacity</b>	1TB						
		<b>Protocol</b>	SATA						
		<b>Form Factor</b>	3.5"						
		<b>Controller</b>	AHCI						
		<b>Reliability</b>	2.0M hours						
		<b>Rated Power On Hours</b>	8760/yr						
		<b>Annualized Failure Rate (based on Rated POH)</b>	<0.62%						
		<b>Rated for 24/7/365 operation</b>	YES						
		<b>Height</b>	1 in; 2.54 cm						
		<b>Width</b>	<table> <tr> <td><b>Media Diameter</b></td> <td>3.5 in; 8.9 cm</td> </tr> <tr> <td><b>Physical Size</b></td> <td>4 in; 10.17 cm</td> </tr> </table>	<b>Media Diameter</b>	3.5 in; 8.9 cm	<b>Physical Size</b>	4 in; 10.17 cm		
		<b>Media Diameter</b>	3.5 in; 8.9 cm						
		<b>Physical Size</b>	4 in; 10.17 cm						
		<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled						
		<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s *						
		<b>Buffer</b>	128MB						
		<b>Cache</b>	Adaptive						
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<table> <tr> <td><b>Single Track</b></td> <td>0.32 ms *</td> </tr> <tr> <td><b>Average</b></td> <td>7.45 ms *</td> </tr> <tr> <td><b>Full Stroke</b></td> <td>14.2 ms *</td> </tr> </table>	<b>Single Track</b>	0.32 ms *	<b>Average</b>	7.45 ms *	<b>Full Stroke</b>	14.2 ms *
		<b>Single Track</b>	0.32 ms *						
		<b>Average</b>	7.45 ms *						
		<b>Full Stroke</b>	14.2 ms *						
<b>Rotational Speed</b>	7,200 rpm								
<b>Logical Blocks</b>	1,953,525,168								
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)								
<b>Performance</b>	<table> <tr> <td><b>Sequential Read</b></td> <td>up to 226MB/s*</td> </tr> <tr> <td><b>Sequential Write</b></td> <td>up to 226MB/s*</td> </tr> </table>	<b>Sequential Read</b>	up to 226MB/s*	<b>Sequential Write</b>	up to 226MB/s*				
<b>Sequential Read</b>	up to 226MB/s*								
<b>Sequential Write</b>	up to 226MB/s*								

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>2TB 7200RPM SATA 3.5in Enterprise HDD</b>	<b>Capacity</b>	2TB
	<b>Protocol</b>	SATA

### Technical Specifications – Storage Drives

<b>Form Factor</b>	3.5"	
<b>Controller</b>	AHCI	
<b>Reliability</b>	2.0M hours	
<b>Rated Power On Hours</b>	8760/yr	
<b>Annualized Failure Rate (based on Rated POH)</b>	<0.62%	
<b>Rated for 24/7/365 operation</b>	YES	
<b>Height</b>	1 in; 2.54 cm	
<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
	<b>Physical Size</b>	4 in; 10.17 cm
<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s *	
<b>Buffer</b>	128MB	
<b>Cache</b>	Adaptive	
<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b>	0.7 ms *
	<b>Average</b>	8.5 ms *
	<b>Full Stroke</b>	15.7 ms *
<b>Rotational Speed</b>	7,200 rpm	
<b>Logical Blocks</b>	3,907,029,168	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>Performance</b>	<b>Sequential Read</b>	up to 226MB/s*
	<b>Sequential Write</b>	up to 226MB/s*

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

<b>4TB 7200 RPM SATA 3.5in Enterprise HDD</b>	<b>Capacity</b>	4TB	
	<b>Protocol</b>	SATA	
	<b>Form Factor</b>	3.5"	
	<b>Controller</b>	AHCI	
	<b>Reliability</b>	2.0M hours	
	<b>Rated Power On Hours</b>	8760/yr	
	<b>Annualized Failure Rate (based on Rated POH)</b>	<0.62%	
	<b>Rated for 24/7/365 operation</b>	YES	
	<b>Height</b>	1 in; 2.54 cm	
	<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
		<b>Physical Size</b>	4 in; 10.17 cm
	<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s *	
	<b>Buffer</b>	256MB	
	<b>Cache</b>	Adaptive	
		<b>Single Track</b>	0.7 ms *

### Technical Specifications – Storage Drives

<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Average</b>	8.5 ms *
	<b>Full Stroke</b>	15.7 ms *
<b>Rotational Speed</b>		7,200 rpm
<b>Logical Blocks</b>		7,814,037,168
<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>Performance</b>	<b>Sequential Read</b>	up to 226MB/s*
	<b>Sequential Write</b>	up to 226MB/s*

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

#### 8TB 7200RPM SATA 3.5in Enterprise HDD

<b>Capacity</b>		8TB
<b>Protocol</b>		SATA
<b>Form Factor</b>		3.5"
<b>Controller</b>		AHCI
<b>Reliability</b>		2.0M hours
<b>Rated Power On Hours</b>		8760/yr
<b>Annualized Failure Rate (based on Rated POH)</b>		<0.62%
<b>Rated for 24/7/365 operation</b>		YES
<b>Height</b>		1 in; 2.54 cm
<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
	<b>Physical Size</b>	4 in; 10.17 cm
<b>Interface</b>		Serial ATA (6.0Gb/s), NCQ enabled
<b>Synchronous Transfer Rate (Maximum)</b>		Up to 600MB/s *
<b>Buffer</b>		256MB
<b>Cache</b>		Adaptive
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.7 ms *
	<b>Average</b>	8.5 ms *
	<b>Full Stroke</b>	15.7 ms *
<b>Rotational Speed</b>		7,200 rpm
<b>Logical Blocks</b>		15,628,053,168
<b>Operating Temperature</b>		41° to 140° F (5° to 60° C)
<b>Performance</b>	<b>Sequential Read</b>	up to 226MB/s*
	<b>Sequential Write</b>	up to 226MB/s*

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

#### 12TB 7200 RPM SATA-6G 3.5in Enterprise HDD

<b>Capacity</b>		12TB
<b>Protocol</b>		SATA
<b>Form Factor</b>		3.5"
<b>Controller</b>		AHCI
<b>Reliability</b>		2.0M hours



### Technical Specifications – Storage Drives

<b>Rated Power On Hours</b>	8760/yr	
<b>Annualized Failure Rate (based on Rated POH)</b>	<0.62%	
<b>Rated for 24/7/365 operation</b>	YES	
<b>Height</b>	1 in; 2.54 cm	
<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
	<b>Physical Size</b>	4 in; 10.17 cm
<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s *	
<b>Buffer</b>	256MB	
<b>Cache</b>	Adaptive	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.7 ms *
	<b>Average</b>	8.5 ms *
	<b>Full Stroke</b>	15.7 ms *
<b>Rotational Speed</b>	7,200 rpm	
<b>Logical Blocks</b>	23,437,770,752	
<b>Operating Temperature</b>	41° to 140° F (5° to 60° C)	
<b>Performance</b>	<b>Sequential Read</b>	up to 226MB/s*
	<b>Sequential Write</b>	up to 226MB/s*

\*Actual performance may vary.

**NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB of system disk (for Windows) is reserved for system recovery software.

### Technical Specifications - Graphics

#### GRAPHICS

<b>NVIDIA® RTX™ 6000 Ada 48GB</b>	<b>Form Factor</b>	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 1230 grams / 2.71 lbs (with extender)
	<b>Max Power Consumption</b>	Power: 300 Watts Cooling: Active
	<b>GPU Memory</b>	48GB GDDR6 memory ECC Memory Bandwidth: Up to 960 GB/s Memory Width: 384 bits
	<b>Connectors</b>	4x DisplayPort 1.4a Quadro Sync II connector Stereo Sync Requires CEM 5.0 16-pin auxiliary power adapter
	<b>Maximum Resolution</b> <b>Bus Type</b> <b>Available Graphics Drivers</b>	7680x4320 @ 120Hz PCI Express 4.0 x16 Windows 11 Windows 10 Linux® 64-bit
<b>NVIDIA® RTX™ A6000 48GB</b>	<b>Form Factor</b>	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 1230 grams / 2.71 lbs (with extender)
	<b>Max Power Consumption</b>	Power: 300 Watts Cooling: Active
	<b>GPU Memory</b>	48GB GDDR6 memory ECC optional Memory Bandwidth: Up to 768 GB/s Memory Width: 384 bit
	<b>Connectors</b>	4x DisplayPort 1.4a Quadro Sync II connector NVLink® Stereo Sync Requires 8-pin auxiliary power
	<b>Maximum Resolution</b> <b>Bus Type</b> <b>Available Graphics Drivers</b>	7680x4320 @ 120Hz PCI Express 4.0 x16 Windows 11 Windows 10 Linux® 64-bit
<b>NVIDIA® RTX™ A5000 24GB</b>	<b>Form Factor</b>	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 1049 grams + 80 grams extender
	<b>Max Power Consumption</b>	Power: 230W Cooling: Active
	<b>GPU Memory</b>	24GB GDDR6 memory ECC optional Memory Bandwidth: Up to 768 GB/s Memory Width: 384 bit
	<b>Connectors</b>	4x DisplayPort 1.4a Quadro Sync II connector NVLink® Stereo Sync Requires 8-pin auxiliary power

### Technical Specifications - Graphics

<b>Maximum Resolution</b>	7680x4320 @ 120Hz
<b>Bus Type</b>	PCI Express 4.0 x16
<b>Available Graphics Drivers</b>	Windows 11 Windows 10 Linux® 64-bit

<b>NVIDIA® RTX A4500 20GB Form Factor</b>	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 1049 grams + 80 grams extender
<b>Max Power Consumption</b>	Power: 200W Cooling: Active
<b>GPU Memory</b>	20GB GDDR6 memory Memory Bandwidth: Up to 640 GB/s Memory Width: 320 bit
<b>Connectors</b>	4x DisplayPort 1.4a Quadro Sync II connector NVLink® Stereo Sync Requires 8-pin auxiliary power
<b>Maximum Resolution</b>	7680x4320 @ 120Hz
<b>Bus Type</b>	PCI Express 4.0 x16
<b>Available Graphics Drivers</b>	Windows 11 Windows 10 Linux® 64-bit

<b>NVIDIA® RTX A4000 16GB Form Factor</b>	Full-Height Single Slot (4.4" Height x 9.5" Length) Weight: 500 grams
<b>Max Power Consumption</b>	Power: 140W Cooling: Active
<b>GPU Memory</b>	16GB GDDR6 memory Memory Bandwidth: Up to 448 GB/s Memory Width: 256 bit
<b>Connectors</b>	4x DisplayPort 1.4a Quadro Sync II connector Stereo Sync Requires 6-pin auxiliary power
<b>Maximum Resolution</b>	7680x4320 @ 120Hz
<b>Bus Type</b>	PCI Express 4.0 x16
<b>Available Graphics Drivers</b>	Windows 11 Windows 10 Linux® 64-bit

<b>AMD® Radeon™ Pro W6800 32GB Form Factor</b>	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 850 grams
<b>Max Power Consumption</b>	Power: 261W Cooling: Active
<b>GPU Memory</b>	32GB GDDR6 memory Memory Bandwidth: Up to 512 GB/s Memory Width: 256 bit

### Technical Specifications - Graphics

<b>Connectors</b>	6x mini-DisplayPort 1.4 Requires 8-pin+6-pin auxiliary power
<b>Maximum Resolution</b>	7680x4320 @ 60Hz
<b>Bus Type</b>	PCI Express 4.0 x16
<b>Available Graphics Drivers</b>	Windows 11 Windows 10 Linux® 64-bit

---

<b>NVIDIA® RTX A2000 12GB</b>	<b>Form Factor</b>	Half-Height Dual Slot (2.713” Height x 6.6” Length) Weight: 306 grams
	<b>Max Power Consumption</b>	Power: 70W Cooling: Active
	<b>GPU Memory</b>	12GB GDDR6 memory Memory Bandwidth: Up to 288 GB/s Memory Width: 192 bit
	<b>Connectors</b>	4x mini-DisplayPort 1.4a
	<b>Maximum Resolution</b>	7680x4320 @ 120Hz
	<b>Bus Type</b>	PCI Express 4.0 x16
	<b>Available Graphics Drivers</b>	Windows 11 Windows 10 Linux® 64-bit

---

<b>NVIDIA® T1000 8GB</b>	<b>Form Factor</b>	Half-Height Single Slot (2.713” Height x 6.137” Length) Weight: 132.6 grams
	<b>Max Power Consumption</b>	Power: 50W Cooling: Active
	<b>GPU Memory</b>	8GB GDDR6 memory Memory Bandwidth: Up to 160 GB/s Memory Width: 128 bit
	<b>Connectors</b>	4x mini-DisplayPort 1.4a
	<b>Maximum Resolution</b>	7680x4320 @ 120Hz
	<b>Bus Type</b>	PCI Express 3.0 x16
	<b>Available Graphics Drivers</b>	Windows 11 Windows 10 Linux® 64-bit

---

<b>NVIDIA® T1000 4GB</b>	<b>Form Factor</b>	Half-Height Single Slot (2.713” Height x 6.137” Length) Weight: 132.6 grams
	<b>Max Power Consumption</b>	Power: 50W Cooling: Active
	<b>GPU Memory</b>	4GB GDDR6 memory Memory Bandwidth: Up to 160 GB/s Memory Width: 128 bit
	<b>Connectors</b>	4x mini-DisplayPort 1.4a
	<b>Maximum Resolution</b>	7680x4320 @ 120Hz
	<b>Bus Type</b>	PCI Express 3.0 x16

### Technical Specifications - Graphics

<b>Available Graphics Drivers</b>	Windows 11 Windows 10 Linux® 64-bit
-----------------------------------	---

---

<b>NVIDIA® T400 4GB</b>	<b>Form Factor</b>	Half-Height Single Slot (2.713” Height x 6.137” Length) Weight: 123.5 grams
	<b>Max Power Consumption</b>	Power: 30W Cooling: Active
	<b>GPU Memory</b>	4GB GDDR6 memory Memory Bandwidth: Up to 80 GB/s Memory Width: 64 bit
	<b>Connectors</b>	3x mini-DisplayPort 1.4a
	<b>Maximum Resolution</b>	7680x4320 @ 120Hz
	<b>Bus Type</b>	PCI Express 3.0 x16
	<b>Available Graphics Drivers</b>	Windows 11 Windows 10 Linux® 64-bit

---

### Technical Specifications - Networking and Communications

#### NETWORKING AND COMMUNICATIONS

<b>HP 10GBase-T Flex Port</b>	<p><b>Connector</b> RJ-45 (Single Port)</p> <p><b>Cabling</b> Twisted Pair Cabling, up to 100 meters</p> <p><b>Controller</b> Marvell AQC113C</p> <p><b>Memory</b> 128KB Tx Buffer, 192KB Rx Buffer on-chip</p> <p><b>Data Rates Supported</b> 10/100/1000 Mbps and 2.5/5/10 Gbps</p> <p><b>Compliance</b> 802.3 - 2018, 802.1AS-2011</p> <p><b>Bus Architecture</b> PCI Express and SMBus</p> <p><b>Data Transfer Mode</b> PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic</p> <p><b>Power Requirement</b> Requires 0.7V VDD, 1V, and 2V for analog, 3.3V for VDDIO</p> <p><b>Boot ROM Support</b> Yes</p> <p><b>Network Transfer Mode</b> Full-duplex</p> <p><b>Network Transfer Rate</b> 10GBASE-T 5GBASE-T 2.5GBASE-T 1000BASE-T 100BASE-TX 10BASE-Te</p> <p><b>Management Capabilities</b> WOL, PXE, UEFI,</p> <p><b>Kit Contents</b> HP 10GBase-T Flex Port NIC Module</p>
<hr/>	
<b>HP 2.5GbE LAN Flex Port</b>	<p><b>Connector</b> RJ45 (Single Port)</p> <p><b>Cabling</b> Copper twisted pair, Cat5e up to 100 meters</p> <p><b>Controller</b> Intel® I225-V</p> <p><b>Memory</b> 4 Tx and 4 Rx Queues, Jumbo Frames up to 9KB and without TSN</p> <p><b>Data Rates Supported</b> 10/100/1000Mbps and 2.5Gbps BASE-T</p> <p><b>Compliance</b> IEEE 802.3, 802.3u (auto-negotiation), 802.3ab, 1588, 802.1AS-Rev, 802.1Qav, 802.1Qbu, 802.1Qbv, 802.3br, 802.3az</p> <p><b>Bus Architecture</b> PCIe G2x1</p> <p><b>Data Transfer Mode</b> PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)</p> <p><b>Power Requirements</b> 2.2 Watts</p> <p><b>Network Transfer Mode</b> Automatic link configuration for speed duplex and flow control</p> <p><b>Network Transfer Rate</b> 2500BASE-T 1000BASE-T 100BASE-TX (Half-duplex supported) 10BASE-Te (Half-duplex supported)</p> <p><b>Management Capabilities</b> WOL, PXE, UEFI, Intel vPro® support with appropriate Intel Chipset, Error Correcting Memory in packet buffers, UDP/TCP/IP Checksum Offload, SCTP receive and transmit integrity offload</p> <p><b>Kit Contents</b> HP 2.5GbE LAN Flex Port Networking Interface Card</p>

### Technical Specifications - Networking and Communications

<b>Intel® X550 10GBASE-T Dual Port NIC</b>	<b>Connector</b>	2 x RJ-45
	<b>Cabling</b>	Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps, 2.5Gbps, or 5Gbps Cat6 (or higher) for 10Gbps up to 55m Cat6a (or higher) for 10Gbps up to 100m
	<b>Controller</b>	Intel X550-AT2
	<b>Memory</b>	Jumbo Frames up to 15.5KB, 64 Tx and 64Rx Queues per port, 160KB/port of programmable memory transmit buffers
	<b>Data Rates Supported</b>	100Mbps (BASE-TX), 1Gbps (BASE-T, 2.5Gbps, 5Gbps, 10Gbps)
	<b>Compliance</b>	802.1q (VLAN), 802.1Qbb, 802.1p, 802.1Qaz
	<b>Bus Architecture</b>	PCIe 3x4
	<b>Data Transfer Mode</b>	PCIe Gen 3 x4 based interface
	<b>Power Requirements</b>	3.9W at 100Mbps 5.5W at 1Gbps 11.2W at 10Gbps
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Mode</b>	Auto negotiation between 1GbE, 2.5GbE, 5GbE and 10GbE
	<b>Management Capabilities</b>	DMI 2.0 Support, Windows Management Instrumentation (WMI) and SNMP, PXE 2.0 through boot ROM, Multi-mode I/O Virtualization, VxLAN, VMDq, VLAN support with VLAN tag insertion
	<b>Kit Contents</b>	Intel® X550 10GBASE-T Dual Port NIC
	<b>Allied Telesis AT-2914SX/LC 1GB LC Fiber NIC</b>	<b>Connector</b>
<b>Cabling</b>		50/125 μm (core/cladding) multimode fiber optic cable up to 500m 62.5/125 μm (core/cladding) multimode fiber optic cable up to 220m
<b>Memory</b>		Jumbo Frames up to 9.6KB
<b>Data Rates Supported</b>		1000SX (1GbE Fiber at 850nm Wavelength)
<b>Compliance</b>		IEEE 802.1p (Quality of Service), IEEE 802.1Q (VLANs), IEEE 802.2 (LLC), IEEE 802.3ac (MAC), IEEE 802.3x (Flow control auto-negotiation), IEEE 802.3z (1000 Base-X), IEEE 802.3ad (Link aggregation) RoHS, UL, FCC/EN55022 Class A, TUV, EN55024, CE, C-TICK, VCCI
<b>Bus Architecture</b>		PCIe x1
<b>Data Transfer Mode</b>		PCIe-based interface
<b>Power Requirements</b>		1.5 Watts (typical)
<b>Network Transfer Rate</b>		1000SX only (1GbE Fiber at 850nm Wavelength)
<b>Management Capabilities</b>		UEFI, Smart Load Balancing and failover, Link aggregation (IEEE802.3ad), Generic trunking (FEC/GEC) / IEEE 802.3ad-draft static, VLAN Support
<b>Kit Contents</b>	Allied Telesis AT-2914SX/LC 1GB LC Fiber NIC with low-profile bracket attached and standard height bracket included	
<b>Allied Telesis AT-2911T/2-901 Dual Port 1GbE NIC</b>	<b>Connector</b>	2 x RJ-45 (Dual Port)
	<b>Cabling</b>	Cat3 (or higher) for 10Mbps Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps up to 100m
	<b>Memory</b>	17 Rx and 16 Tx queues
	<b>Data Rates Supported</b>	10/100/1000 Mbps

### Technical Specifications - Networking and Communications

<b>Compliance</b>	IEEE 802.1p (Quality of Service), IEEE 802.1Q (VLANs), IEEE 802.2 (LLC), IEEE 802.3ac (MAC), IEEE 802.3x (Flow control auto-negotiation), IEEE 802.3z (1000 Base-X), IEEE 802.3ad (Link aggregation), IEEE 802.3ab (10/100/1000T) RoHS, UL, FCC/EN55022 Class A, TUV, EN55024, CE, C-TICK, VCCI
<b>Bus Architecture</b>	PCIe 2x1
<b>Data Transfer Mode</b>	PCIe-based interface
<b>Power Requirements</b>	2.4 Watts (typical)
<b>Management Capabilities</b>	VLAN support, Link aggregation LACP, Link aggregation smart switch, Failover, Smart Load Balancing (SLB), iSCSI boot support, Windows Management Instrumentation (WMI), PXE 2.1, SNMP
<b>Kit Contents</b>	Allied Telesis AT-2911T/2-901 Dual Port 1GbE NIC with low-profile bracket attached and standard bracket included

#### NVIDIA® Mellanox® ConnectX-6 DX Dual Port 10/25GbE SFP28 NIC

<b>Connector</b>	2 x SFP28 Transceiver Cage (Dual Port)*
<b>Cabling</b>	Depends on transceiver pairing. Typically OM4 or higher MMF LC fiber optic cabling with LC SFP28 Transceivers.
<b>Controller</b>	ConnectX6-DX
<b>Memory</b>	256Mbit SPI Quad Flash Device
<b>Data Rates Supported</b>	1/10/25GbE
<b>Compliance</b>	<ul style="list-style-type: none"> <li>– IEEE 802.3by 25 Gigabit Ethernet</li> <li>– IEEE 802.3ae 10 Gigabit Ethernet</li> <li>– IEEE 802.3ap based auto-negotiation and KR startup</li> <li>– IEEE 802.3ad, 802.1AX Link Aggregation</li> <li>– IEEE 802.1Q, 802.1P VLAN tags and priority</li> <li>– IEEE 802.1Qau (QCN)</li> <li>– Congestion Notification</li> <li>– IEEE 802.1Qaz (ETS)</li> <li>– IEEE 802.1Qbb (PFC)</li> <li>– IEEE 802.1Qbg</li> <li>– IEEE 1588v2</li> <li>– Jumbo frame support (9.6KB)</li> <li>– Safety: CB/cTUVus/CE</li> <li>– EMC: CE/FCC/VCCI/RCM</li> <li>– RoHS Compliant</li> <li>– KCC</li> <li>– CAN ICES-3 (B)</li> <li>– NM EN 55035/55032 (Morocco)</li> <li>– UKCA</li> </ul>
<b>Bus Architecture</b>	PCIe Gen 4 x8
<b>Data Transfer Mode</b>	PCI Express - stores and accesses Ethernet fabric connection information and packet data
<b>Power Requirements</b>	11.5 Watts (typical)
<b>Network Transfer Rate</b>	1Gbps, 10Gbps, 25Gbps
	<b>NOTE:</b> Network Transfer Rate depends on transceiver model.*
<b>Kit Contents</b>	NVIDIA® Mellanox® ConnectX-6 DX Dual Port 10/25GbE SFP28 NIC



### Technical Specifications - Networking and Communications

<b>HP 1GbE Fiber LC Single Flex Port</b>	<b>Connector</b>	LC (Little Connector) Fiber (Single Port)
	<b>Cabling</b>	LC Fiber Cabling
	<b>Controller</b>	AT-29M2
	<b>Data Rates Supported</b>	1GBASE-SX
	<b>Bus Architecture</b>	USB 3.1G1
	<b>Power Requirements</b>	Up to 3.3 Watts
	<b>Network Transfer Mode</b>	1GBASE-SX
	<b>Network Transfer Rate</b>	1GBASE-SX
	<b>Management Capabilities</b>	Wake on LAN, Digital Diagnostic Monitoring
	<b>Kit Contents</b>	HP 1GbE Fiber LC Single Flex Port NIC
<b>Intel® I225-T1 Single Port 2.5GbE PCIe NIC</b>	<b>Connector</b>	RJ-45 (Single Port)
	<b>Cabling</b>	Cat5e (or better) up to 100m
	<b>Controller</b>	Intel® Ethernet I225 Controller
	<b>Memory</b>	Jumbo Frames up to 9.5KB, 4 Tx and Rx Queues
	<b>Data Rates Supported</b>	2.5GbE, 1GbE, 100MbE, 10MbE
	<b>Compliance</b>	IEEE 802.3 auto negotiation, 802.3x, 802.3z
	<b>Bus Architecture</b>	PCIe-based interface for active state operation
	<b>Data Transfer Mode</b>	PCIe-based interface for active state operation
	<b>Power Requirements</b>	1.9 Watts (typical)
	<b>Management Capabilities</b>	WOL, PXE 2.1, Power Management Protocol Offload (proxying), MAC Power Management, Active State Power Management
<b>Network Transfer Rate</b>	Intel I225-T1 1-Port 2.5GbE NIC with standard height bracket attached and Low-profile bracket included Product Literature	
<b>Intel Ethernet I350-T4V2 4-Port 1Gb NIC</b>	<b>Connector</b>	4x RJ-45 (Quad Port)
	<b>Cabling</b>	Cat3 (or higher) for 10Mbps Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps up to 100m
	<b>Controller</b>	Intel® I350
	<b>Memory</b>	Jumbo Frames up to 9.5KB, 8 Tx/Rx Queue pairs per port, Main Internal memory is Error Code Correcting
	<b>Data Rates Supported</b>	10Mbps, 100Mbps, 1Gbps
	<b>Compliance</b>	IEEE 802.3 auto negotiation, 802.3, 802.3u, 802.3ab, 802.3x, 802.3z, IEEE1588 protocol and 802.1AS implementation, 802.3az EEE
	<b>Bus Architecture</b>	PCI Express 2.1 x4
	<b>Data Transfer Mode</b>	PCIe-based interface for active state operation
	<b>Power Requirements</b>	5 Watts
	<b>Network Transfer Mode</b>	Multi-speed, full, and half-duplex
<b>Network Transfer Rate</b>	10BASE-T 100BASE-Tx 1000BASE-T	
<b>Management Capabilities</b>	WOL, PXE 2.1, UEFI, Power Management Protocol Offload (proxying), MAC Power Management, Active State Power Management, VLAN, ACPI	
<b>Kit Contents</b>	Intel® Ethernet I350-T4V2 4-Port 1Gb NIC with full-height bracket installed Low-profile bracket included	

<b>Date of change:</b>	<b>Version History:</b>		<b>Description of change:</b>
September 5, 2023	From v1 to v2	Changed	Social and Environmental Responsibility section

© 2023 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and Thunderbolt are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Red Hat is a registered trademark of Red Hat, Inc. in the United States and other countries. Firewire is a trademark of Apple Inc. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. ENERGY STAR® is a registered trademark of the U.S. Environmental Protection Agency. USB Type-C® and USB-C® are trademarks of USB Implementers Forum. AMD and Radeon are trademarks of Advanced Micro Devices, Inc. Bluetooth is a trademark of its proprietor and used by HP Inc. under license. NVIDIA, Cuda, Pascal, and Quadro are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.