
QuickSpecs

Overview

HPE DDR4 SmartMemory

When you choose HPE DDR4 SmartMemory, you get great performance, reliability, and efficiency that provides the compatibility, capacity and bandwidth you need to productively manage your expanding workload with the HPE ProLiant Gen9 server, Apollo Family, Synergy and Blade Systems. The quality and reliability of DRAM are more important now than ever, as data center trends such as server virtualization, cloud computing, the use of large database applications, have all increased the need for higher capacity memory with greater uptime.

HPE SmartMemory goes through rigorous qualification and testing processes that unlock extended memory performance features available only with Hewlett Packard Enterprise Gen9 servers. This extensive testing ensures that HPE server memory is completely compatible with and optimized for HPE servers.

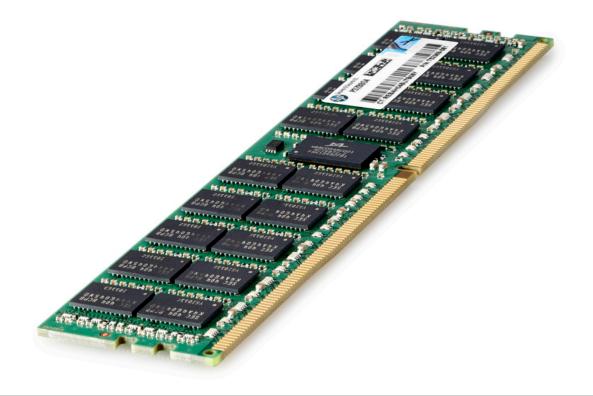

What's New

• HPE SmartMemory 128GB DDR4 2400 MT/s memory supported on HPE Gen9 Servers



Models

Memory Selection

To streamline the configuration process for HPE ProLiant Gen9 servers and to provide the best product availability, HPE recommends memory from the list located here: <u>http://www.hpe.com/products/recommend</u>

Best product availability is limited to US, Canada, and Latin America at this time.

Models DDR4 SmartMemory

Registered Memory Kit

HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726717-B21 HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726718-B21 HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit 759934-B21 HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726719-B21 HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 728629-B21 HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit 805347-B21 HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit 805349-B21 HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit 836220-B21 HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit 805351-B21

Load-reduced DIMMs (LRDIMM)

HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15 Load Reduced Memory Kit 726720-B21 HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726722-B21 HP 48GB (1x16GB +1x32GB) DDR4-2133 CAS-15-15-15 Load Reduced Memory FIO Kit 792278-B21 HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726724-B21 HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17 Load Reduced Memory Kit 805353-B21 HPE 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory 805358-B21 Kit HPE 128GB (1x128GB) Octal Rank x4 DDR4-2400 CAS-20-18-18 Load Reduced Memory 809208-B21 Kit

NOTE: Memory DIMM availability with a server platform is dependent upon completion of certification testing.



Compatibility

DIMM Option Compatibility¹

HPE P/N	Description	Where Used				
726717-B21	HP 4GB 1Rx8 PC4-2133P-R Kit	Apollo 2000/Apollo 4200/Apollo 4500/DL60 Gen9/DL80 Gen9/DL120 Gen9/DL160 Gen9/DL180 Gen9/DL360 Gen9/DL380 Gen9/DL388 Gen9(BTO)/ML110 Gen9/ML150 Gen9/ML350 Gen9				
726718-B21	HP 8GB 1Rx4 PC4-2133P-R Kit	Apollo 2000/Apollo 4200/Apollo 4500/Apollo 6000/BL460c Gen9/BL660c Gen9/DL60 Gen9/DL80 Gen9/DL120 Gen9				
759934-B21	HP 8GB 2Rx8 PC4-2133P-R Kit					
726719-B21	HP 16GB 2Rx4 PC4-2133P-R Kit	DL160 Gen9/DL180 Gen9/DL360 Gen9/DL380 Gen9 DL388 Gen9(BTO)/DL560/DL580/ML110 Gen9/ML150 Gen9				
728629-B21	HP 32GB 2Rx4 PC4-2133P-R Kit	ML350 Gen9/WS460c Gen9				
805347-B21	HPE 8GB 1Rx8 PC4-2400T-R Kit	Apollo 2000/Apollo 4200/Apollo 4500/Apollo 8000/BL460c Gen DL60 Gen9/DL80 Gen9/DL120 Gen9/DL160 Gen9/DL180 Gen9 DL360 Gen9/DL380 Gen9/DL388 Gen9(BTO)/ML110 Gen9 ML150 Gen9/ML350 Gen9/Synergy 480 Gen9/WS460c Gen9				
805349-B21	HPE 16GB 1Rx4 PC4-2400T-R Kit	Apollo 2000/Apollo 4200/Apollo 4500/Apollo 8000/BL460c Gen9 Cloud Management IT/DL60 Gen9/DL80 Gen9/DL120 Gen9 DL160 Gen9/DL180 Gen9/DL360 Gen9/DL380 Gen9 DL388 Gen9(BTO)/ML110 Gen9/ML150 Gen9/ML350 Gen9 Synergy 480 Gen9/WS460c Gen9				
836220-B21	HPE 16GB 2Rx4 PC4-2400T-R Kit	Apollo 2000/Apollo 4200/Apollo 4500/Apollo 8000/BL460c Gen9 DL60 Gen9/DL80 Gen9/DL120 Gen9/DL160 Gen9/DL180 Gen9 DL360 Gen9/DL380 Gen9/DL388 Gen9(BTO)/ML110 Gen9 ML150 Gen9/ML350 Gen9/Synergy 480 Gen9				
805351-B21	HPE 32GB 2Rx4 PC4-2400T-R Kit	Apollo 2000/Apollo 4200/Apollo 4500/Apollo 8000/BL460c Gen9 Cloud Management IT/DL60 Gen9/DL80 Gen9/DL120 Gen9 DL160 Gen9/DL180 Gen9/DL360 Gen9/DL380 Gen9 DL388 Gen9(BTO)/ML110 Gen9/ML150 Gen9/ML350 Gen9 Synergy 480 Gen9/WS460c Gen9				

NOTE: Memory DIMM availability with a server platform is dependent upon completion of certification testing.



Compatibility

Load Reduced DIMMs (LRDIMM)¹

HPE P/N	Description	Where Used
726720-B21	HP 16GB 2Rx4 PC4-2133P-L Kit	Apollo 2000/Apollo 4200/Apollo 4500/Apollo 6000/BL460c Gen9/BL660c Gen9/DL60 Gen9/DL80 Gen9/DL120 Gen9 DL160 Gen9/DL180 Gen9/DL360 Gen9/DL380 Gen9 DL388 Gen9(BTO)/DL560/DL580/ML110 Gen9/ML150 Gen9
726722-B21	HP 32GB 4Rx4 PC4-2133P-L Kit	ML350 Gen9/WS460c Gen9
792278-B21	HP 48GB (32+16)PC4-2133P-L Combo FIO Kit	BL460c Gen9/BL660c Gen9/WS460c Gen9
		Apollo 4200/Apollo 4500/Apollo 6000/BL460c Gen9/BL660c Gen9/
726724-B21	HP 64GB 4Rx4 PC4-2133P-L Kit	DL160 Gen9/DL180 Gen9/DL360 Gen9/DL380 Gen9
		DL388 Gen9(BTO)/DL560/DL580
		ML350 Gen9/WS460c Gen9
		Apollo 2000/Apollo 4200/Apollo 4500/Apollo 6000/BL460c Gen9
805353-B21	HPE 32GB 2Rx4 PC4-2400T-L Kit	DL60 Gen9/DL80 Gen9/DL120 Gen9/DL160 Gen9/DL180 Gen9
		DL360 Gen9/DL380 Gen9/DL388 Gen9(BTO)
		ML150 Gen9/ML350 Gen9/Synergy 480 Gen9/WS460c Gen9
805358-B21	HPE 64GB 4Rx4 PC4-2400T-L Kit	Apollo 2000/Apollo 4200/Apollo 4500/Apollo 6000/BL460c Gen9
000000021		DL160 Gen9/DL180 Gen9/DL360 Gen9/DL380 Gen9 DL388 Gen9(BTO)/ML350 Gen9/Synergy 480/WS460c Gen9
809208-B21	HPE 128GB 8Rx4 PC4-2400T-L Kit	Apollo 2000/Apollo 6000/BL460c Gen9/DL360 Gen9/DL380 Gen9/ML350 Gen9/Synergy 480 Gen9/WS460c Gen9

NOTE: Memory DIMM availability with a server platform is dependent upon completion of certification testing.

What is HPE SmartMemory?	HPE SmartMemory is unique technology designed for HPE servers. It passes rigorous qualification tests and optimizes memory performance on the HPE Proliant Rack and Tower servers, Apollo family, Blade systems, an Synergy systems. Authenticated HPE SmartMemory supports extended memory performance in the competitive landscape and provides customers with service enhancement through HPE Active Health Systems and other HPE proprietary software.			
Quality and Performance	HPE SmartMemory undergoes a rigorous qualification process to provide our customers with the highest server memory quality options. Its performance is tested and optimized for HPE servers, supporting unique features only available with HPE ProLiant Rack and Tower servers, Apollo family, Blade and Synergy systems. In addition, it enhances memory throughput up to 23% and achieves an improvement in latency of up to 25%.			
HPE Active Health System	Future ROM updates will enable HPE SmartMemory to work in conjunction with the HPE Active Health System which monitors changes to the server hardware configuration to enable lifecycle monitoring of memory health status. Having insight into memory related service events will shorten problem diagnosis and deliver rapid resolutions if and when failures occur. Whereas the pre-failure alert simply notifies the administrator of an impending failure, HPE SmartMemory can provide insight with rich information on memory-related events like multi-bit errors or configuration issues.			
Support Matrix	Please see the following URL for the latest list of supported servers: http://h22195.www2.hp.com/DDR4memoryconfig/			
Other Resources	For the latest updates on HPE Server Options, visit: http://www.hp.com/go/hpqo			
	For more information on the HPE Persistent Memory Options, visit: http://www.hpe.com/servers/persistentmemory			

Standard Features

HPE Support Center	Personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers. Learn more: https://www.hpe.com/us/en/services/it-support.html The HPE Support Center Mobile App allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalize IT support anywhere, anytime. NOTE: The HPE Support Center Mobile App is subject to local availability
Parts and materials	Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain operating condition for covered hardware products, including parts and materials for available and recommended engineering improvements.
	Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.
Warranty / Service Coverage	For ProLiant servers and storage systems, this service covers HPE-branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as external monitors up to 22 inches and tower UPS products; these items will be covered at the same service level and for the same coverage period as the server unless the maximum supported lifetime and/or the maximum usage limitation has been exceeded. Coverage of the UPS battery is not included; standard warranty terms and conditions apply. For details on the HPE Server Options Limited Warranty visit: http://h20566.www2.hpe.com/hpsc/wc/public/home
General Memory Population Rules and Guidelines:	 Install DIMMs only if the corresponding processor is installed. If only one processor is installed in a two-processor system, only half of the DIMM slots are available. To maximize performance, it is recommended to balance the total memory capacity between all installed processors and load the channels similarly whenever possible. When two processors are installed, balance the DIMMs across the two processors. White DIMM slots denote the first slot to be populated in a channel. Place the DIMMs with the highest number of ranks in the white slot when mixing DIMMs of different ranks on the same channel. Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported. Mixing the 128GB LRDIMM with other capacities is not supported. Quad rank LRDIMMs are capable of up to 3DPC. DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed. The maximum memory speed is a function of the memory type and number of installed processor model. The maximum memory capacity is a function of the memory type and number of installed processor. To enable Mirrored Memory mode, the system allocates half of the installed memory as system memory and the remaining half as mirrored memory. All memory channels must be configured identically. Only an RDIMM can be mixed with HPE NVDIMM When installing NVDIMM(s) on the same memory channel as RDIMM(s), populate the RDIMM(s) first and farthest from the processor, then populate the NVDIMM(s) last and closer to the processor.

Service and Support

Technical Specifications

Memory Speed by Processor Model

With Intel® Xeon® E5-2600 v3 Series Processor Family

		Registe	r DIMM (RDI	Load Reduced (LRDIMM)				
DIMM Rank	Single Rank (1R)	Single Rank (1R)	Dual Rank (2R)	Dual Rank (2R)	Dual Rank (2R)	Dual Rank (2R)	Quad Rank (4R)	Quad Rank (4R)
HPE SKU	726717-B21	726718-B21	759934- B21	726719- B21	726720- B21	728629- B21	726722-B21	726724-B21
DIMM Capacity	4GB	8GB	8GB	16GB	32GB	16GB	32GB	64GB
DRAM Depth [bit]	512MB	1G	512MB	1G	1G	2G	2G	2G
DRAM Width [bit]	X8	Х4	X8	X4	X4	X4	Χ4	Χ4
DRAM Density	4Gb	4Gb	4Gb	4Gb	4Gb	8Gb	8Gb	8Gb
CAS Latency	15-15-15	15-15-15	15-15-15	15-15- 15	15-15-15	15-15-15	15-15-15	15-15-15
DIMM Native Speed (MT/s)	2133	2133	2133	2133	2133	2133	2133	2133
Voltage	1.2V	1.2V	1.2V	1.2V	1.2V	1.2V	1.2V	1.2V
			MAXIMU		ΓΥ (GB)			
4 slot servers	16	32	32	64	128	NA	NA	NA
8 slot servers	32	64	64	128	256	NA	NA	NA
12 slot servers	48	96	96	192	384	192	384	NA
16 slot servers	64	128	128	256	512	256	512	1024
24 slot servers	96	192	192	384	768	384	768	1536
32 slot servers	128	256	256	512	1024	512	1024	2048
48 slot server	192	384	384	768	1536	768	1536	3072
96 slot server	NA	768	768	1536	3072	1536	3072	6144

Technical Specifications


		Register DIMM	(RDIMM)	Load Reduced (LRDIMM)			
DIMM Rank	Single Rank (1R)	Single Rank (1R)	Dual Rank (2R)	Dual Rank (2R)	Dual Rank (2R)	Quad Rank (4R)	Octal Rank (8R)
HPE SKU	805347-B21	805349-B21	836220- B21	805351- B21	805353-B21	805358-B21	809208-B21
DIMM Capacity	8GB	16GB	16GB	32GB	32GB	64GB	128GB
DRAM depth [bit]	1G	2G	1G	2G	2G	2G	2G
DRAM Width [bit]	X8	X4	X4	X4	X4	X4	X4
DRAM Density	8Gb	8Gb	4Gb	8Gb	8Gb	8Gb	8Gb
CAS Latency	17-17-17	17-17-17	17-17-17	17-17-17	17-17-17	17-17-17	20-18-18
DIMM Native Speed (MT/s)	2400	2400	2400	2400	2400	2400	2400
Voltage	1.2V	1.2V	1.2V	1.2V	1.2V	1.2V	1.2V
		М		PACITY (GB)			
2 slot servers	NA	32	NA	64	NA	NA	NA
8 slot servers	64	128	128	256	NA	NA	NA
12 slot servers	96	192	192	384	384	NA	NA
16 slot servers	128	256	256	512	512	1024	2048
24 slot servers	192	384	384	768	768	1536	3072
32 slot servers	256	512	512	1024	1024	2048	4096
48 slot servers	384	768	768	1536	1536	3072	6144
96 slot servers	NA	1536	1536	3072	3072	6144	12288

With Intel® Xeon® E5-2600v4 Series Processor Family

Memory options part number decoder

Short Name

Example: HPE 8GB 1Rx4 PC4-2133P-R Kit

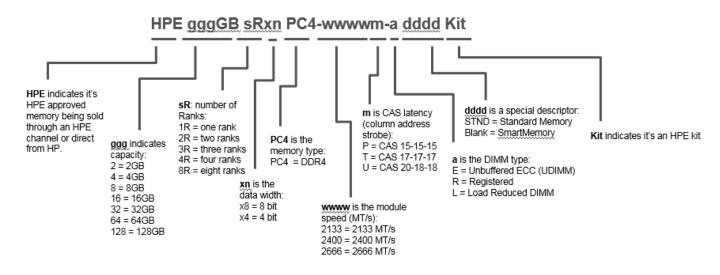


Technical Specifications

Long Name

Example: HPE 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit



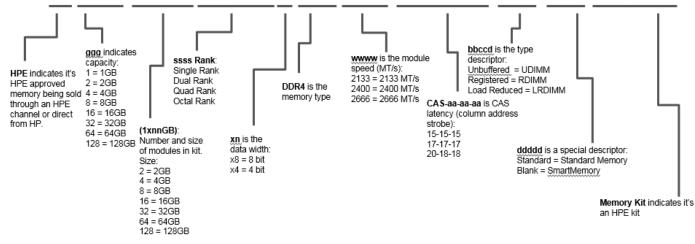

Summary of Changes

Date	Version History	Action	Description of Change			
13-Feb-2017	From Version 7 to 8	Changed	Models section was updated.			
06-Jun-2016	From Version 6 to 7	Changed	Anged Overview, Models, Compatibility, Standard Features, Service and Support, and Technical Specifications sections were updated. Memory Speed Table, Ground rules updates, Tech Term edits			
31-Mar-2016	From Version 5 to 6	Changed	Overview, Overview, Standard Features, Service and Support, and Technical Specifications			
		Added	SKU Added in Models section: 805347-B21, 805349-B21, 836220-B21, 805351-B21, 805353- B21, 805358-B21, 726718-B21, 726719-B21, 728629-B21, 726722-B21, 809208-B21			
01-Jun-2015	From Version 4 to 5	Added	SKU Added in Models section: 726724-B21			
		Changed	What´s new, Technical Specifications & Models sections were updated.			
30-Mar-2015	From Version 3 to 4	Changed	Overview, Service and Support and Technical Specifications sections were updated			
		Added	SKU Added on Models: 728629-B21			
16-Jan-2015	From Version 2 to 3	Changed	Performance section on Standard Features was updated			
01-Dec-2014	From Version 1 to 2	Changed	Overview and Technical Specifications sections were updated			
		Added	SKUs added to Models: 726717-B21, 759934-B21, 726720-B21, 792278-B21			



© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Xeon and Intel are registered trademarks of Intel Corporation.

c04355083 - 15051 - Worldwide - V8 - 13-Feb-2017

Hewlett Packard Enterprise