


Overview


HP recommends
Windows Vista® Business

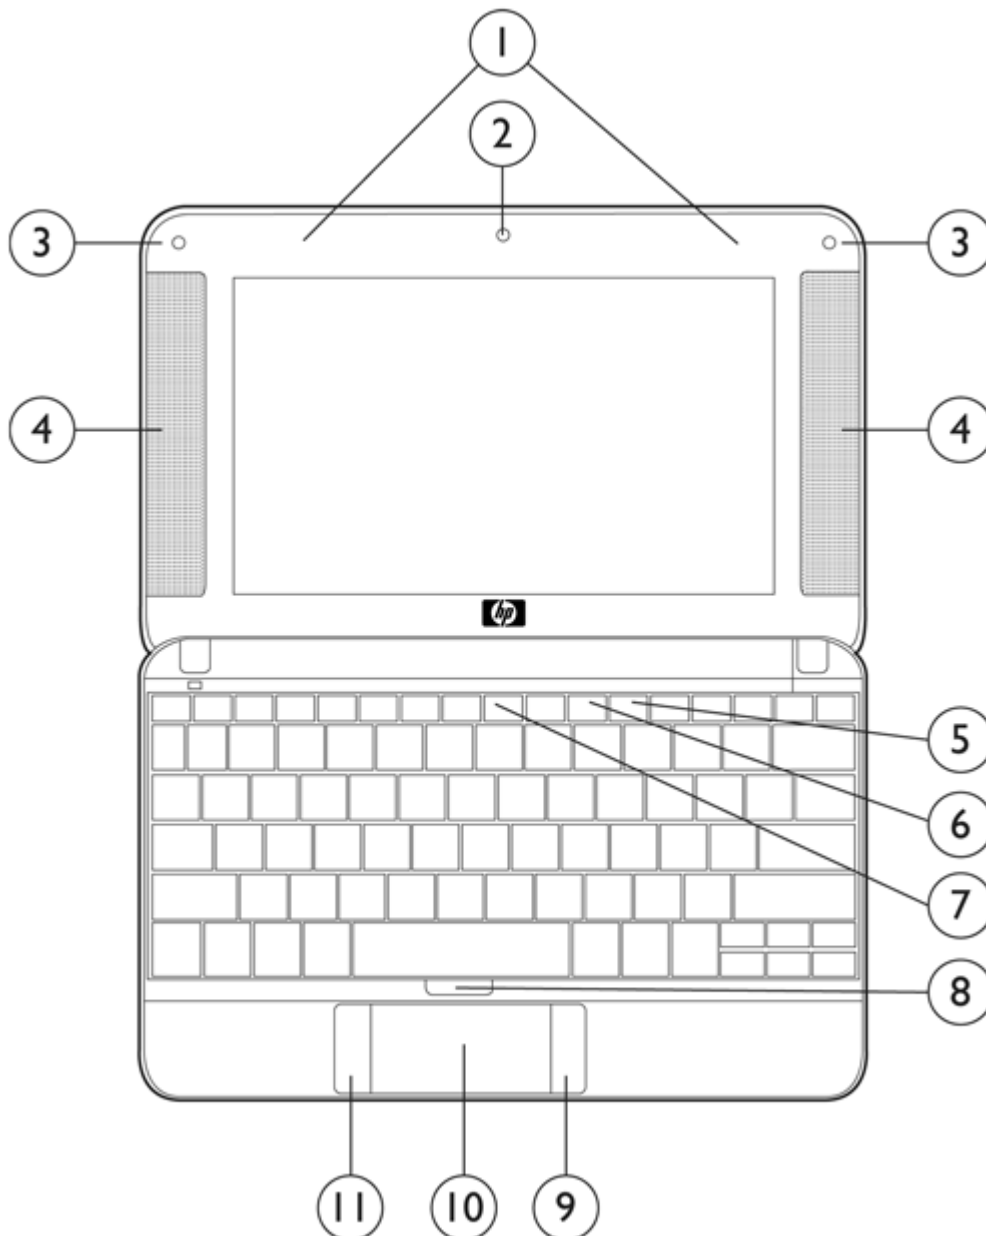



- 1. WLAN antennas (with WLAN option)
- 2. Optional VGA camera
- 3. Integrated stereo microphones
- 4. Stereo speakers
- 5. Volume up function key
- 6. Volume down function key

- 7. Volume mute function key
- 8. Touchpad on/off button
- 9. Right touchpad button
- 10. Touchpad with scroll zone
- 11. Left touchpad button

Overview

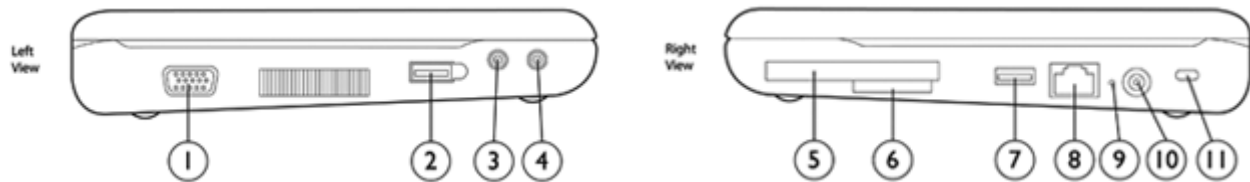

- | | |
|------------------------------|--------------------------|
| 1. VGA/external monitor | 7. USB 2.0 |
| 2. Powered USB 2.0 | 8. RJ-45/ethernet |
| 3. Stereo microphone in | 9. Battery LED |
| 4. Stereo headphone/line out | 10. Power connector |
| 5. ExpressCard/54 slot | 11. Kensington lock slot |
| 6. Secure Digital slot | |

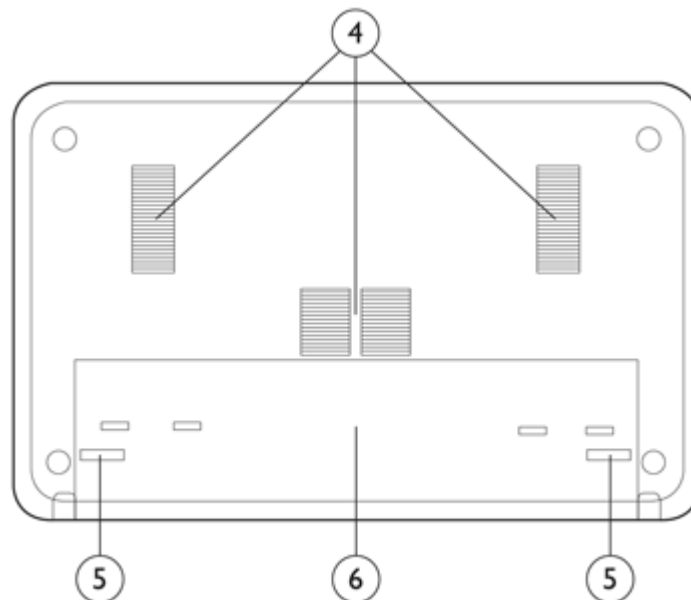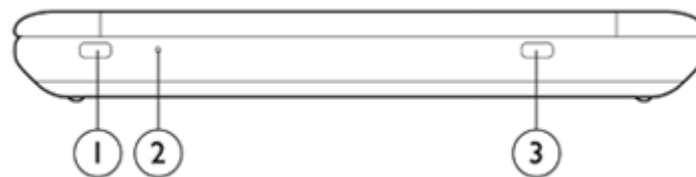

- | | |
|---|----------------------------|
| 1. Power button with LED | 4. Vents |
| 2. Internal storage activity / HP 3D DriveGuard LED | 5. Battery release latches |
| 3. Wireless on/off button with LED | 6. Battery bay |

Overview

At A Glance

- Full-function PC with utmost mobility and durable all-aluminum case
- Ultra-portable light-weight design starting at 2.6 lb (1.19 kg) and 1.05 in (27 mm) thin at front
- 8.9-inch diagonal WXGA scratch-resistant display
- 92% full-size QWERTY keyboard and touchpad
- Optional 802.11 a/b/g wireless LAN and Bluetooth, HP Wireless Assistant
- Up to 160 GB 7200 rpm hard drive with HP 3D DriveGuard
- Optional integrated VGA Webcam
- ExpressCard/54 slot
- Secure Digital slot for HCSD and MMC media cards
- Upgradeable up to 2GB of 667 MHz DDR2 SDRAM

Standard Features

Processors	VIA C7™-M ULV processor (1.0GHz,* 128 KB L2 cache, 400 MHz FSB)
	VIA C7-M ULV processor (1.2 GHz, 128 KB L2 cache, 800 MHz FSB)
	VIA C7-M ULV processor (1.6 GHz, 128 KB L2 cache, 800 MHz FSB)
	* SuSE Linux models only
	NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

Operating System	Preinstalled	Genuine Windows Vista Home Basic 32*
		Genuine Windows Vista Business 32*
		Genuine Windows Vista Business downgrade to Genuine Windows XP Professional installed*†
		SuSE Linux Enterprise Desktop 10
		FreeDOS
	Supported	Genuine Windows XP Professional
* Certain Windows Vista product features require advanced or additional hardware. See http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx and http://www.microsoft.com/windowsvista/getready/capable.mspx for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit http://www.windowsvista.com/upgradeadvisor .		
† Windows Vista Business disk also included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order annually at least 25 customer systems with the same custom image.		

Chipset	VIA 896
---------	---------

Graphics	VIA Chrome 9	
	Up to 256 MB of shared system memory for Windows with 2 GB of system memory	
	Up to 128 MB of shared system memory for Windows with 1 GB of system memory	
	Up to 64 MB of shared system memory for Linux	

Display	Internal	8.9-inch WXGA display with 1280 x 768 resolution Scratch-resistant treatment on acrylic panel cover
	External	Up to 32-bit per pixel color depth VGA port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz
NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.		

Standard Features

Memory	Standard	1024 MB or 2048 MB 667 MHz DDR2 SDRAM SODIMM; one SODIMM slot
	Maximum	Supports up to 2048 MB maximum

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility.

Communications	Integrated Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
----------------	---

Wireless Devices Support for secure, integrated wireless LAN options featuring support for the latest industry standards. Wireless LAN is factory configurable only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN options.

All 802.11 integrated wireless LAN options	Wi-Fi certified
	Cisco Compatible Extensions support (Version 4.0)
	Wired Equivalent Privacy (WEP) support up to 128-bit keys
	Wi-Fi Protected Access (WPA) and WPA2 support
Broadcom 4311AG 802.11a/b/g Wi-Fi Adapter	802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP
	Advanced Encryption Standard (AES) support
	WiFi certified for WPA2, WMM
	Dual antennas integrated in the display enclosure
Broadcom 4311BG 802.11b/g Wi-Fi Adapter	Integrated support for 802.11 a, b and g
	Up to 54-mbps data rate
Broadcom 4311BG 802.11b/g Wi-Fi Adapter	Integrated support for 802.11 b and g
	Up to 54-mbps data rate
HP Integrated Module with Bluetooth Wireless Technology	Bluetooth Specification v2.0 compliant
	Works with a wide range of Bluetooth devices

Keyboard Spill-resistant keyboard is 92% of full size, 101/102-key compatible with isolated inverted-T cursor control keys, both left and right control and alt keys, 12 function keys, and hotkey combinations for audio volume, power conservation, brightness, and other features. US and international key layouts are available.

Pointing Device Touchpad with scroll zone and two soft-touch buttons

Expansion Card Slots	ExpressCard/54 slot	Supports ExpressCard/54 and ExpressCard/34
	Secure Digital slot	Supports HCSD (Secure Digital), MMC (MultiMedia Card)

Standard Features

Storage	Internal Storage Device	120/160 GB 5400 rpm SATA Hard Drive 120/160 GB 7200 rpm SATA Hard Drive 4 GB Flash Module*
	NOTE: Hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 10 GB is reserved for the system recovery software.	
	HP 3D DriveGuard	The hard drive is mounted to the notebook frame, reducing the transmission of shock away from the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.
External Optical Drives		Via optional HP External MultiBay II (9.5-mm): MultiBay II DVD-ROM Drive MultiBay II DVD/CD-RW Combo Drive MultiBay II DVD+/-RW SuperMulti DL Drive
* SuSE Linux models only		

Interfaces	ExpressCard/54 slot	Supports ExpressCard/54 and ExpressCard/34
	External Monitor	One – VGA
	Stereo Microphone In	One
	Stereo Headphone/Line out	One
	Power Connector	One
	RJ-45/Ethernet	One
	USB 2.0	Two (one powered)
	LED Status Indicators	Five

Audio	ADI1984HD High Definition CODEC
	24-bit DAC
	Integrated stereo speakers
	Stereo headphone/line out
	Stereo microphone in

Standard Features

Software

Preinstalled Software with Windows Vista or Windows XP	MS Office Ready 2007
	Norton Internet Security
Additional software available from the Web for Windows Vista or Windows XP	MS Live Messenger
	Adobe Flash Player
Preinstalled Software with SuSE Linux Enterprise Desktop 10	Roxio Creator Basic
	Intervideo WinDVD
	PDF Complete
	HP Backup and Recovery Manager
	HP Webcam
	OpenOffice Suite
	Evolution Email
	Evince Document Viewer
	OpenOffice Draw
	F-Spot Photo Brower
	Gnome CD/DVD Creator
	Helix Banshee Music Player
	Real Player 10 Media Player
	Firefox Web Browser
	Gaim Instant Messenger
	Gnome FTP File Transfer cation
	Liferea Feed Reader
	Mutt Mail Client

SMBIOS Version 2.4

System Management BIOS, previously known as DMI BIOS, is used to store system management information.

Security

Standard Features

Configuration Control Hardware
Memory Change Alert
Ownership Tag
Setup Password
Power-On Password
Kensington Lock Slot

Power Supply

External 65-watt Smart AC adapter, 6-foot (1.8-meter) power cord included.
Total length including External AC adapter is 12 feet (3.66 meter).
HP Fast Charge Technology*

*Fast Charge Technology recharges your battery up to 90% within 90 minutes when the system is off.
Fast Charge Technology does not apply to 12-cell Ultra-Capacity batteries.

Battery

Primary Battery

3-cell (28 WHr) high capacity Li-Ion
6-cell (55 WHr) high capacity Li-Ion

Standard Features

Battery Life	3-cell Primary Battery	Up to 2 hours 15 minutes
	6-cell Primary Battery	Up to 4 hours 30 minutes

NOTE: The listed battery life measurements were taken on models running Microsoft Windows Vista. Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.

System Standby Time	Up to 1 week
---------------------	--------------

Power Conservation	Standby
	ACPI compliance

Service and Support	HP Services includes a one-year standard parts and labor warranty, pick-up or carry-in, and toll-free 7 x 24 hardware technical phone support (depending on model). On-site service and warranty upgrades are also available. (depending on model).
---------------------	---

For configurations with SuSE Linux Enterprise Desktop 10, HP Services may vary depending on the country of purchase, and toll-free 5 x 8 (Monday through Friday; 9:00am to 5:00pm CST) hardware technical phone support is available.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

Select Model(s)

2133 SKU Part# KX869AT#ABA Smart Buy	Processor	VIA C7®-M ULV Processor (1.2 GHz, 128 KB L2 cache)
	Operating System	SuSE Linux Enterprise Desktop 10
	System Memory	1024 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	120-GB 5400 rpm
	Display	8.9-inch diagonal WXGA Integrated VGA camera
	Graphics	Via Chrome 9
	Audio	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	Communications	Integrated Broadcom Gigabit Network Connection (10/100/1000 NIC)
	Integrated Wireless	Broadcom 802.11a/b/g
	Pointing Device	Touchpad with scroll zone
	Battery	3-cell (28 WHr) Lithium-Ion
	Power	External 65W adapter
	Warranty	1/1/0

Standard Features

2133 SKU Part# KX868AT#ABA Smart Buy	Processor	VIA C7®-M ULV Processor (1.2 GHz, 128 KB L2 cache)
	Operating System	Genuine Windows Vista Home Basic 32
	System Memory	1024 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	120-GB 5400 rpm
	Display	8.9-inch diagonal WXGA Integrated VGA camera
	Graphics	Via Chrome 9
	Audio	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	Communications	Integrated Broadcom Gigabit Network Connection (10/100/1000 NIC)
	Integrated Wireless	Broadcom 802.11a/b/g
	Pointing Device	Touchpad with scroll zone
	Battery	3-cell (28 WHr) Lithium-Ion
	Power	External 65W adapter
	Warranty	1/1/0

2133 SKU Part# KX871AA#ABA Regional	Processor	VIA C7®-M ULV Processor (1.2 GHz, 128 KB L2 cache)
	Operating System	Genuine Windows Vista Home Basic 32
	System Memory	1024 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	160-GB 5400 rpm
	Display	8.9-inch diagonal WXGA Integrated VGA camera
	Graphics	Via Chrome 9
	Audio	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	Communications	Integrated Broadcom Gigabit Network Connection (10/100/1000 NIC)
	Integrated Wireless	Broadcom 802.11a/b/g, Bluetooth 2.0
	Pointing Device	Touchpad with scroll zone
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 65W adapter
	Warranty	1/1/0

Standard Features

2133 SKU Part# KX870AT#ABA Smart Buy	Processor	VIA C7®-M ULV Processor (1.6 GHz, 128 KB L2 cache)
	Operating System	Genuine Windows Vista Business 32
	System Memory	2048 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	120-GB 7200 rpm
	Display	8.9-inch diagonal WXGA Integrated VGA camera
	Graphics	Via Chrome 9
	Audio	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	Communications	Integrated Broadcom Gigabit Network Connection (10/100/1000 NIC)
	Integrated Wireless	Broadcom 802.11a/b/g, Bluetooth 2.0
	Pointing Device	Touchpad with scroll zone
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 65W adapter
	Warranty	1/1/0

2133 SKU Part# KR922UT#ABA Smart Buy	Processor	VIA C7®-M ULV Processor (1.0 GHz, 128 KB L2 cache)
	Operating System	SuSE Linux Enterprise Desktop 10
	System Memory	512 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	4GB Flash
	Display	8.9-inch diagonal WXGA Integrated VGA camera
	Graphics	Via Chrome 9
	Audio	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	Communications	Integrated Broadcom Gigabit Network Connection (10/100/1000 NIC)
	Integrated Wireless	Broadcom 802.11a/b
	Pointing Device	Touchpad with scroll zone
	Battery	3-cell (28 WHr) Lithium-Ion
	Power	External 65W adapter
	Warranty	1/1/0

Options

Memory	2 GB 667 MHz DDR2 SDRAM	EM995AA
Storage Solutions	HP Versatile Storage Cart	AL587AA
MultiBay II Storage (9.5-mm)	HP External MultiBay II	PA509A#xxx
	HP MultiBay II DVD-ROM Drive	PA849A
	HP MultiBay II DVD/CD-RW Combo Drive	PA850A
	HP MultiBay II DVD+/-RW SuperMulti DL Drive	PA851A
	HP 80-GB 5400rpm MultiBay II Hard Drive	PH357A
Power	HP 1-bay Battery Charging Station	RW635AA#xxx
	HP 5-bay Battery Charging Station	RW636AA#ABA
	HP 2133 Battery Adapter Kit (June 2008)	KV828AA
	65W Smart AC Adapter	ED494AA#ABA
	HP 2133 6-cell Primary Battery (June 2008)	KU528AA
Carrying Cases	HP 2133 Carrying Case	TBD
	HP Ultra-portable Carrying Case	TBD
	HP Basic Carrying Case	AJ078AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Nylon Backpack	RR317AA
	HP Deluxe Roller Case	GD405AA
Security	HP/Kensington MicroSaver Security Lock	PC766A
Input/Output Devices	HP USB Keyboard & Mouse Bundle	RC465AA#xxx
	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP USB Optical Travel Mouse	RH304AA

Memory

Supports up to 2048 MB* of 667 MHz DDR2 SDRAM
One DIMM slot
DIMM sizes supported: 1024 MB and 2048 MB

Standard Memory	1024 MB (1024 MB x 1)
	2048 MB (2048 MB x 1)

Optional Memory Upgrades	Support for up to 2048 MB* of memory is available (with the installation of optional DDR2 SDRAM memory kit). Memory slot is user accessible. Please refer to the Hardware and Software Guide for installation procedures.
--------------------------	---

Up to	Slot 1
2048 MB	2048 MB

NOTE: Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility.

Memory Upgrades	1-GB 667-MHz DDR2 SDRAM	EM994AA
	2-GB 667-MHz DDR2 SDRAM	EM995AA

Storage

Internal Storage Device

Hard Drives (SMART SATA)	Quantity Supported	Drive Bay
120 GB 5400 rpm	One	Dedicated hard drive bay
160 GB 5400 rpm	One	Dedicated hard drive bay
120 GB 7200 rpm	One	Dedicated hard drive bay
160 GB 7200 rpm	One	Dedicated hard drive bay
Flash Module		
4 GB Flash Module*	One	Dedicated hard drive bay
* SuSE Linux models only		

Optical Drive Support

External Optical Drives	Quantity Supported	Optional Expansion Unit
MultiBay II DVD-ROM Drive	One	HP External MultiBay II
MultiBay II DVD/CD-RW Combo Drive		
MultiBay II DVD+/-RW SuperMulti DL Drive		

Technical Specifications

System Unit	Dimensions (HxWxD)	1.05 (at front) x 10.04 x 6.5 in 27 (at front) x 255 x 165 mm
	Weight	Starting at 2.6 lb (1.19 kg)
	NOTE: Height varies depending upon where on the notebook the measurement is made. Weight includes 3-cell battery, 1 GB memory, 4 GB flash module, 802.11 wireless communications module. Weight varies by configuration and components.	
Stand-Alone Power Requirements	Normal Operating Voltage	19 V
	Average Operating Power	25 W
	Max Operating Power	< 65 W
Temperature	Operating	32° to 95° F (0° to 35° C)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes
	BSMI	Yes

Technical Specifications

HP 65W Smart AC Adapter	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)		
	Weight	0.62 lb (280 g)		
	Input	100 to 240 VAC		
		Input Efficiency	83% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
	Output	Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC	
		Output power 65W	65W	
		DC output	18.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown	
		Connector	3 pin/grounded, mates with interchangeable cords	
		Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
	Non-operating (storage) temperature		-4° to 149° F (-20° to 65° C)	
	Altitude		0 to 10,000 ft (0 to 3,048 m)	
	Humidity		20% to 80%	
	Storage Humidity		10% to 90%	
	EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF – over 200,000 hours at 25°C ambient condition.		
Option Kit Contents	65W AC Adapter, power cable, warranty booklet			

6-Cell (55 WHr) Lithium-ion battery	Dimensions (H x W x L)	1.69 x 1.57 x 8.19 in (4.3 x 4 x 20.8 cm)	
	Weight	0.77 lb (0.35 kg)	
	Cells/Type	6-cell Lithium-Ion	
	Energy	Watt-hour Capacity	55Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF Mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF
Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery		

Technical Specifications

3-Cell (28.8 WHr) Lithium-ion battery	Dimensions (H x W x L)	1.69 x 0.79 x 8.19 in (4.3 x 2 x 20.8 cm)	
	Weight	0.39 lb (0.176 kg)	
	Cells/Type	3-cell Lithium-Ion	
	Energy	Watt-hour Capacity	28.8 WHr
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF Mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF

8.9-inch diagonal WXGA Display	Active Area (W x H)	7.63 x 4.58 in (19.39 x 11.63 cm)	
	Diagonal Size	8.9 in (22.6 cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	400:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	.15 mm
		Format	1280 x 768
		Configuration	RGB stripe
	Backlight	CCFL	
	PPI	168	
	Viewing Angle	±60° Horizontal, ±30° Vertical (typical)	

Internal Storage

Technical Specifications

160 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lb (113 g)	
	Capacity	160 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

120 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lb (113 g)	
	Capacity	120 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	234,441,648	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

160 GB 5400 rpm SATA Hard Drive	Drive Weight	0.22 lb (101 g)	
	Capacity	160 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

120 GB 5400 rpm SATA Hard Drive	Drive Weight	0.22 lb (101 g)	
	Capacity	120 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	234,441,648	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

4 GB Flash Module* (PATA)	Interface	Standard ATA / IDE
	Connector	40-pin (2.54mm pitch) / 44-pin (2.00mm pitch)
	Capacity	4 GB
	Transfer mode	PIO Mode-4; MWDMA Mode-2
	Sustained Read/Write Performance	11 / 7 (MB/sec)
	ECC Support	3 random 12 bit symbol ECC per 512 bytes (RS)
	Low Power Consumption (3.3V/5.0V)	Active mode: 35mA/55mA Sleep mode: 100µA/150µA
	Security function	Write protection jumper (Optional) Factory-programmed, up to 20-byte unique ID (Software Protect mechanism) Protection Zone (Optional)
Product types		Standard, Low-profile, Housing, Through Pin, Dual Through Pin
Orientation		90D, 180D, 270D

* SuSE Linux models only

Removable Storage Drives – MultiBay II

DVD-ROM Drive	Dimensions	0.37 x 5.51 x 5.04 in (0.95 x 14.0 x 12.8 cm)	
	Weight	0.34 lb (155 g)	
	Access Times	Random	<120 ms CD
			<200 ms DVD
	Max Data Transfer Rate	24X-CD-ROM	3,600 KB/s
		8X-DVD	10,800 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5 GB	
	Transport	Tray Loading	

Technical Specifications

DVD/CD-RW Combo Drive	Dimensions	0.37 x 5.51 x 5.04 in (0.95 x 14.0 x 12.8 cm)	
	Weight	0.45 lb (205 g)	
	Access Times	Random	<120 ms CD
			<155 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		24X CD-RW	3,600 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	CD-R, CD-RW	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	700 MB	
	Transport	Tray loading	

DVD+/-RW SuperMulti DL Drive	Dimensions	0.37 x 5.51 x 5.04 in (0.95 x 14.0 x 12.8 cm)	
	Weight	0.45 lb (205 g)	
	Access Times	Random	<150 ms CD
			<125 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		10X CD-RW	1,500 KB/s
		4X DVD+R	5,400 KB/s
		2.4X DVD+RW	3,240 KB/s
		4X DVD-R	5,400 KB/s
		2X DVD-RW	2,700 KB/s
		2X DVD-RAM	2,700 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM	

Technical Specifications

Max Media Capacity (read)	8.5 GB
Max Media Capacity (write)	8.5 GB
Transport	Tray Loading

80-GB 5400 rpm MultiBay II Hard Drive	MultiBay II Drive Adapter	Dimensions (H x W x D)	0.37 x 5.51 x 5.04 in (0.95 x 14.0 x 12.8 cm)
		Weight	0.16 lb (72 g)
	Drive Weight		0.22 lb (101 g)
	Capacity		80 GB
	Height		0.37 in (9.5 mm)
	Width		2.75 in (70 mm)
	Interface		ATA-6
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed		5400 rpm
	Logical Blocks		156,301,488
	Operating Temperature		41° to 131° F (5° to 55° C)
	Features		ATA Security

PremierSound Audio

Hardware	Implementation	ADI1984HD High Definition CODEC
	Volume Controls	Up, down, and mute function keys
	Full Duplex	Yes
	Sound Blaster Pro compatible	Yes
	Microphone Jack	Stereo or mono
	Headphone/Line Out Jack	Stereo

Technical Specifications

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Internal Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Communications

Integrated Broadcom NetLink Gigabit Ethernet PCI Controller (BCM5788M)	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
		100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
		1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42)
		Auto-Negotiation (Automatic Speed Selection)
	Power Management	Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
		IEEE 802.1p QoS (Quality of Service) Support
		IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
		ACPI compliant -- multiple power modes
	Performance Features Manageability	Situation-sensitive features reduce power consumption
		NIC Battery Saving Mode (enabled by default)
		TCP/IP/UDP Checksum Offload (configurable)
		Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)
	Interface	PXE 2.1 Remote Boot
		Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))
		Comprehensive diagnostic and configuration software suite
		32-bit PCI, 33-MHz
		NIC Device Driver Name
	Drivers Available	Broadcom NetLink Gigabit Ethernet
		Microsoft Windows XP
		Microsoft Windows 2000

Broadcom 4311AG 802.11a/b/g Wi-Fi Adapter	Wireless LAN Standards	IEEE 802.11a
		IEEE 802.11b
		IEEE 802.11g

Technical Specifications

Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at: www.hp.com/go/notebooks/WLAN)	
Frequency Band	2.4 GHz and 5 GHz	
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps	
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM	
Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK) ²	17.5 dBm	
Output Power (for OFDM; power varies by data rate) ²	15 dBm	
Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode ³ : 390 mW (nominal) Sleep mode: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm, 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment
	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)

Technical Specifications

Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Choice of Configuration Utility:	
	• Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows 2000 or XP. WLAN may also be compatible with certain third-party software supplicants.	

Broadcom 4311BG 802.11b/g Wi-Fi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 2000 and XP (details at http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CKK) ²	17.5 dBm
	Output Power (for OFDM; 15 dBm power varies by data rate) ²	

Technical Specifications

Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode3: 390 mW (nominal) Sleep mode: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm, 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Microsoft Windows 2000 or XP Choice of Configuration Utility: • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) Microsoft Windows Vista • Microsoft Windows Vista Wireless Network Connection Manager	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows 2000 or XP. WLAN may also be compatible with certain third-party software supplicants.	

HP Integrated Module
with Bluetooth Wireless
Technology

Bluetooth Specification	2.0 Compliant
Dimensions	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
Frequency Band	2402 to 2480 MHz

Technical Specifications

Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
Power Consumption	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
Antenna	Internally integrated within module
Range	Up 33 ft (10 m)
Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
OS Support	Genuine Windows Vista Genuine Windows XP Genuine Windows 2000
Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows XP Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Temperature	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% Non-operating 5% to 95%
Altitude	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
Bluetooth Profiles Supported	(with Bluetooth for Windows 4.0 software) Serial Port Profile (SPP)* Dial-Up Networking (DUN)* Generic Object Exchange Profile (GOEP) Object Push Profile (OPP)* File Transfer Profile (FTP)

Technical Specifications

Synchronization Profile (SYNC)
Hard Copy Cable Replacement (HCRP)*
Personal Area Networking Profile (PAN)*
Human Interface Device Profile (HID)*
FAX Profile (FAX)
Basic Imaging Profile (BIP)
Headset Profile (HSP)
Hands Free Profile (HFP)
Advanced Audio Distribution Profile (A2DP)

* indicates the profile is also supported by Microsoft Windows XP SP2

Environmental Data

Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

Copyright © 2008 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows XP, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.