


### Overview



1. Source: Selects the video input (DVI or DisplayPort)
2. Minus (-): Decreases Brightness adjustment level.
3. Plus (+): increases Brightness adjustment level
4. Power: Turns the monitor on or off if Master Power Switch (rear) is On.
5. Power LED: Blue = Fully powered.  
Amber = Sleep mode.  
Continuous Flashing Blue (0.5 Hz) = Unsupported Mode  
Three Flashes of Blue (0.5 Hz) = Upper or Lower Limit of Brightness Control

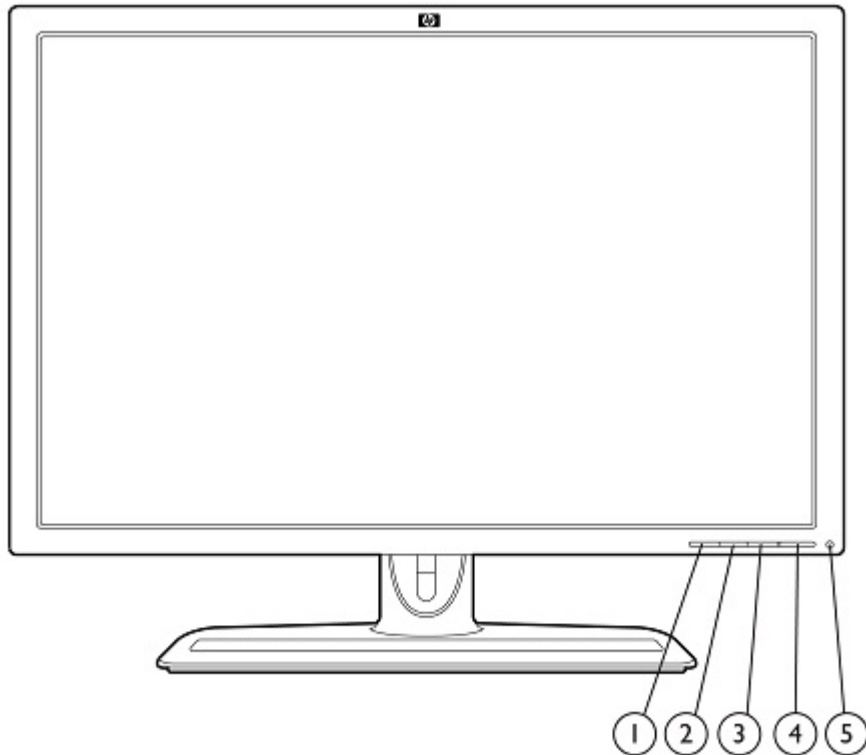

**HP ZR2740w Bezel Buttons**

### Models

XW476A4, XW476A8

### Technical Specifications

**Note:** To drive the ZR2740w monitor, the system must meet the following requirements:

1. Host Graphics Card: Must be able to provide a resolution of 2560 x 1440 @ 60Hz (check host QuickSpecs)
  - a. Note for graphics cards with DMS-59 interface - to drive the ZR2740w with DMS-59:
    - Graphics card DMS-59 output must have DisplayPort support (check QuickSpecs)
      - Examples of cards that do not have DisplayPort support: Radeon 6350
      - Examples of cards that do have DisplayPort support: FirePro 2270, NVS 300
    - DMS-59 to DisplayPort Adapter Cable
      - Customer must order XP688AA DMS-59 to Dual DisplayPort adapter cable
      - Use DisplayPort cable from adapter to ZR2740w
2. Interface Cable: Must be DisplayPort or Dual-Link DVI cable (HP Dual-Link DVI cable has green colored connector shrouds on both end)

<b>Panel</b>	<b>Type</b>	IPS (in-plane switching) LED Backlit LCD
	<b>Viewable Image Area</b> (diagonal)	<b>68,5 cm</b> , (27 in.) widescreen; diagonally measured
	<b>Screen Opening</b> (W x H)	<b>59,8 x 33,6 cm</b> , (23.5 x 13.3 in.)
	<b>Resolution</b>	2560 x 1440 @ 60 Hz; 3.7MP
	<b>Aspect Ratio</b>	16:9 Widescreen
	<b>Viewing Angle</b> (typical)	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
	<b>Maximum Brightness</b> (typical)*	380 nits cd/m <sup>2</sup>
	<b>Minimum Brightness</b> (typical)*	50 nits cd/m <sup>2</sup>
	<b>Contrast Ratio</b> (typical)*	1000:1
	<b>Dynamic Contrast Ratio</b> (typical)*	N/A
	<b>Response Time</b> (typical)*	12 ms (gray to gray); 14 ms (on/off)
	<b>Pixel Pitch</b>	0.2331 mm
	<b>Backlight Lamp Life</b> (to half brightness)	39,000 hours minimum
	<b>Color Gamut Area vs. NTSC</b>	96% (CIE 1976), 77% (CIE 1931)
	<b>Color Gamut Coverage of sRGB</b>	100% (CIE 1931)
	<b>Color Support**</b>	Up to 1.07 billion colors

\*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

\*\* Display of up to 1.07 billion colors on ZR2740w requires use of DisplayPort input with 10-bit content.

### Technical Specifications

<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Source, Minus, Plus, Power On/Off
	<b>Languages</b>	N/A
<b>Signal Interface/ Performance</b>	<b>User Controls</b>	Brightness, Source
	<b>Horizontal Frequency</b>	90 kHz
	<b>Vertical Frequency</b>	60 Hz
	<b>Native Resolution</b>	2560 x 1440 @ 60 Hz; 3.7MP
	<b>Preset VESA Graphic Modes (non-interlaced)</b>	2560 x 1440 @ 60 Hz
	<b>Maximum Pixel Clock Speed</b>	250 MHz
	<b>User Programmable Modes</b>	None
	<b>Anti-Glare</b>	Yes
	<b>Default Color Temperature</b>	6500 K
	<b>Video/Other Inputs</b>	<b>Plug and Play</b>
<b>USB 2.0 Hub</b>		One upstream, four downstream ports (cable included)
<b>Input Connectors</b>		(1) DisplayPort connector; (1) Dual-Link DVI connector, (HDCP support on DisplayPort and DVI)
<b>Video Cable</b>		DisplayPort, Dual-Link DVI-D
<b>Video Cable Lengths (DisplayPort, Dual-Link DVI-D)</b>		<b>1,8 m (5.9 ft.)</b>
<b>USB Cable</b>		Included
<b>USB Cable Length</b>		<b>1,8 m (5.9 ft.)</b>
<b>Power</b>	<b>Input Power</b>	100- 240 VAC, 50 to 60 Hz
	<b>Energy Star Power</b>	57 W
	<b>Default Power<sup>4</sup></b>	95W
	<b>Maximum Power<sup>5</sup></b>	120 W
	<b>Power Saving</b>	< 2 W sleep (standby)
	<b>Power Cable Length</b>	<b>1,9 m (6.2 ft.)</b>
<b>Mechanical</b>	<b>Dimensions (W x D x H)</b>	<b>Unpacked w/stand</b> <b>64,6 x 23,5 x 44 to 54 cm,</b> (25.4 x 9.3 x 17.3 to 21.26 in.)
		<b>Unpacked w/o stand (head only)</b> <b>64,6 x 6,8 x 39,2 cm,</b> (25.4 x 2.7 x 15.4 in.)
		<b>Packaged</b> <b>35,5 x 48,0 x 75,5 cm,</b> (14 x 18.9 x 29.7 in.)
		<b>Base area (footprint)</b> <b>33,4 x 23,5 cm,</b> (13.1 x 9.3 in.)

### Technical Specifications

	<b>Weight</b>	<b>Head Only</b>	<b>8 kg</b> (17.6 lb.)	
		<b>Unpacked</b>	<b>10,5 kg</b> (23.1 lb.)	
		<b>Packaged</b>	<b>13,5 kg</b> (29.5 lb.)	
<b>Ergonomic Features</b>	<b>8-Way Comfort Adjust Stand</b>	Easily adjust the display in height, tilt, swivel and pivot for maximum comfort. Eight degrees of adjustment freedom including height up/down, tilt forward/back, swivel left/right and pivot portrait/landscape.		
	<b>HP Quick Release 2</b>	Ultra convenient set up. Easily mount and detach the display head from the stand. The new HP Quick Release 2 is flush with rear of the display head for a clean appearance. <b>(NOTE: Not compatible with HP Quick Release Kit).</b>		
	<b>VESA External Mounting</b>	User can VESA mount the display in two ways: <ol style="list-style-type: none"> <li>1. Use the 100x100mm VESA mount holes that are in the QR2 recess.</li> <li>2. Remove the QR2 mount plate from the stand and mount the plate to the VESA arm. Then the ZR2740w head connects to the QR2 mount plate and the quick release function is retained.</li> </ol>		
	<b>Cable Management</b>	Enhanced cable management for easy concealment of power, video and USB cables. Effortless routing of cables through the base of the column with removable cover plate.		
	<b>Detachable Stand</b>	Stand ships detached and easily attaches with new HP Quick Release 2 mechanism.		
	<b>Tilt Range</b>	-5° to +35°		
	<b>Swivel Range</b>	Yes (+/- 45°)		
	<b>Height Adjustable</b>	Yes (10 cm)		
	<b>Pivot Rotation</b>	Yes		
	<b>Environmental</b>	<b>Temperature - Operating</b>	<b>5° to 35° C</b> (41° to 95° F)	
<b>Temperature - Non-operating</b>		<b>-20° to 60° C</b> (-4° to 140° F)		
<b>Humidity - Operating</b>		20% to 80% non-condensing		
<b>Humidity - Non-operating</b>		5% to 95%, 38.7° C max wet-bulb		
<b>Altitude - Operating</b>		<b>0 to 5,000 m</b> (16,404 ft)		
<b>Altitude - Non-operating</b>		<b>0 to 12,192 m</b> (0 to 40,000 ft)		
<b>White LED Backlight</b>		Yes		
<b>Arsenic-Free Glass<sup>2</sup></b>		Yes		
<b>BFR/PVC Free<sup>3</sup></b>		Yes, except cables		
<b>Mercury Free</b>		Yes		
<b>Environmental Data</b>	<b>Eco-Label Certifications &amp; declarations</b>	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: <ul style="list-style-type: none"> <li>● IT ECO declaration</li> </ul>		
	<b>Energy Consumption</b> (in accordance with US Energy Star test method)	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
Normal Operation	58.54 W	59.63 W	58.37 W	
Sleep	0.868 W	1.1 W	0.852 W	

### Technical Specifications

Off	0.62 W	0.764 W	0.609 W
<b>Heat Dissipation*</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
Normal Operation	200 BTU/hr	204 BTU/hr	200 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	2 BTU/hr	3 BTU/hr	2 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 16.6% post-consumer recycled plastic (by wt.)
- This product is 92.3% recycle-able when properly disposed of at end of life.

#### Packaging Materials

<b>External:</b>	Corrugated carton	1600 g
<b>Internal:</b>	EPS (Expanded Polystyrene)	570 g
	EPE - Expanded Polyethylene	27 g

#### RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: [http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds

### Technical Specifications

- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

#### Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/>

### Technical Specifications

[envmanagement.html](#)

<b>Options</b> (sold separately)	<b>HP LCD Speaker Bar-Part number NQ576AA</b>	Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and dual external headphone jacks. Sold separately. For more information, refer to the product's QuickSpecs.
	<b>HP USB Graphics Adapter-Part number NL571AA</b>	Enables connection of up to six simultaneous displays to help you boost productivity and multi-task across several open applications. Use one Adapter to bridge between a notebook or desktop PC and second monitor or use multiple Adapters to connect several displays to each other.
	<b>HP Business PC Security Lock Kit-Part number PV606AA</b>	Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.
	<b>HP Single Monitor Arm - Part number BT861AA</b>	The flexible design of the HP Single Monitor Arm provides a seemingly endless range of display adjustments with an amazing 13 inches of lift, 50 degrees of tilt, and 360 degrees of pan and rotation - all at your fingertips -- helping you stay comfortable and productive throughout the day.
<b>Other</b>	<b>Accessories Included</b>	DisplayPort cable, Dual-Link DVI-D cable, USB cable, power cable (single unit)
	<b>User Guide Languages</b>	English, French, Spanish (Int'l), Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish, Swedish, Czech, Hungarian, Polish, Russian, Greek, Slovenian, Turkish, Arabic, Bahasa Indonesian, S. Chinese, T. Chinese, Korean and Japanese.
	<b>Warranty Languages</b>	English, LA Spanish, Brazilian Portuguese, German, French, Italian, Turkish, Greek, Arabic, Russian, Hungarian, Czech, Polish, Japanese, Dutch, Danish, Finnish, Norwegian, Swedish, S. Chinese, T. Chinese, Korean, Slovenian, Bahasa Indonesia, Serbian
	<b>Color</b>	Black with brushed aluminum accents
	<b>VESA External Mounting</b>	Yes, standard 4 hole pattern, 100 mm
	<b>Security Lock-Ready</b>	Yes, one slot available.
<b>Certification and Compliance</b>	ISO 9241-3xx, CISPR, VCCI, KC (Korean), ETL (CSA, UL), EN55022 Class B, CNS 13438 Class B, IEC 60950-1, China Energy Label (CEL), SmartWay - NA only - Energy logistics, EUP Lot 6 Tier 1, BSMI' AS/NZS 3548 Class B, "GS" Mark, TUV, CE, FCC Part 15 class B, EN55024 Class B, EN60950-1, CCC' C-Tick, GOST, NOM <b>NOTE:</b> <a href="#">agency rating label and product serial number located on a pull-out tab on left side of monitor.</a>	
<b>Compatibility</b>	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.	
<b>Service and Warranty</b>	Protected by HP, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard limited warranty. Certain restrictions and exclusions apply. <sup>1</sup>	

### Technical Specifications

© Copyright 2011, 2012, 2013 Hewlett-Packard Development Company, L.P.

<sup>1</sup> HP Care Pack Services extend service contracts beyond the standard warranties. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

<sup>2</sup> Arsenic and its compounds were not detected using US EPA Test Methods 3052 & 3052/6010b by ICP or ICP-AES.

<sup>3</sup> Meets the evolving definition of 'BFR/PVC-free' as set forth in the "iNEMI Position Statement on the 'Definition of Low-Halogen' Electronics (BFR/CFR/PVC-Free)". Plastic parts contain < 1000 ppm (0.1%) of bromine [if the Br source is from BFRs] and < 1000 ppm (0.1%) of chlorine [if the Cl source is from CFRs or PVC or PVC copolymers]. All printed circuit board (PCB) and substrate laminates contain bromine/chlorine total < 1500 ppm (.15%) with a maximum chlorine of 900 ppm (.09%) and maximum bromine being 900 ppm (.09%). External cables (power, video and USB) are not BFR/PVC-free. Service parts after purchase may not be BFR/PVC-free.

<sup>4</sup> Default Power is measured with factory defaults, including factory default brightness and USB ports loaded at 25% of maximum.

<sup>5</sup> Maximum Power is measured with monitor at maximum brightness and with USB ports loaded at 100% of maximum.

All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.